




## LOAD MONITOR

### Power Factor $\cos \varphi$

Type: LMCB

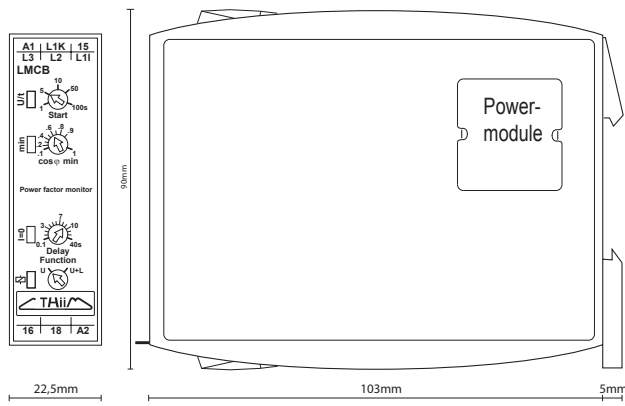

### FEATURES

- Fan monitoring (V-belt break)
- Filter monitoring (filter blockage)
- Protection for single and 3-phase lightly loaded motors.
- Current transformer may be connected for  $I_N > 10 A$
- Suitable for frequency converters
- Voltage range: 1-phase 24-230 V, 3-phase 24 - 400 V
- Current range 0,5 - 10 A

### Description:

The load monitor determines the phase angle  $\cos \varphi$ , which is the phase shift between current and voltage of asynchronous motors. The load monitor is directly connected to the motor and no additional sensors are required.

Because the phase angle depends on the motor load, it represents a directly measurable variable for the motor load.

When the actual  $\cos \varphi$  passes the set point  $\cos \varphi$ , the unit will react by letting the (min) LED blink. After a set period of time, the relay R switches to failure position and the (min) LED is switched on.

If no current flows between L1i and L1k, the I=0 LED will blink until the set value of delay is reached. Then the LED is switched on.

### Application:


Load monitoring of pumps and fans and other lightly loaded motors.

Controlling the input flow rate at which new material is fed into, for instance, a grinding gear based on the current load status.


Under load monitoring can recognize power transmission faults (for example, when a V-belt breaks) or flow interruptions

### CONNECTION DIAGRAM

Three-phase connection

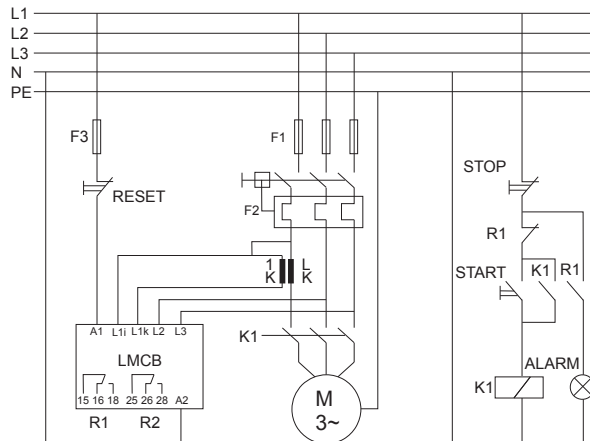


Single-phase connection

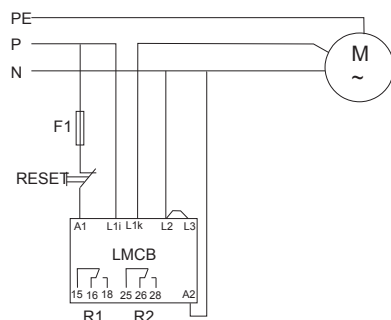


### FUNCTION DIAGRAM

Overload monitoring



Underload monitoring



## SPECIFICATIONS

### INPUT

Rated voltage	1-phase 24 - 230 V 3-phase 24 - 400 V
Rated current	0,5 to 10 A
Phase angle $\cos \varphi$	0.....0.9 adjustable
Hysteresis	Constant at approx. 3-5%
Operating delay	0.5...160 sec. adjustable

### PERFORMANCE PARAMETERS

<b>TIMING</b>	
Reset after failure of supply voltage	>20ms
Recovery time	<1sec (measuring circuit)

### OUTPUT

2 changeover contacts for power	
Contact voltage	250V~(max.: 440V~250V-)
Continuous current	8 A
Switching capacity	1500 VA (220V-, $\cos \varphi = 1$ )
Mechanical life	> 3 x 10 <sup>7</sup> operations
Electrical life	> 3 x 10 <sup>5</sup> operations (230V~, 5A, $\cos \varphi = 1$ )
Contact material	silver-nickel gold plated

### SUPPLY

AC supply range with transformer	24, 42, 48, 110, 127, 230, 380, 400, 440 V AC +10%...15% UN
AC frequency range	48 to 63 Hz
Power consumption	2 VA
Duty cycle	100%, class 1c

### GENERAL

Temperature range	- 25 °C to + 55 °C ambient
Humidity	Up to 90 % RH non-condensing
VDE 0435	Test voltage 2000V~
VDE 0110	Group B 250V~

DIN rail installation in accordance with DIN 46277/3  
(European std. EN 50022)

Protection class IP 40 in accordance with VDE 0106 and VBG4  
Screw terminals up to 4mm<sup>2</sup>, protection rating IP 20  
Terminal designation and arrangement in accordance with  
DIN 46199

Weight 0.14 kg in 45 mm. housing



International Standards	
EMC directive 89/336:	EN50081 - Emission EN50082 - Immunity
Low voltage directive 73/23:	EN60255 - Electrical Relays

## ORDERING INFORMATION

### EXAMPLE:

**TYPE**  
Pump-Fan monitoring relay

**SUPPLY**  
AC with transformer

### SUPPLY VOLTAGE

Excl. transformer module	
From 20 to 28 VAC	xxx
From 36 to 46 VAC	024
From 41 to 52 VAC	042
From 99 to 140 VAC	048
From 108 to 139 VAC	110
From 198 to 264 VAC	127
From 323 to 418 VAC	230
From 342 to 440 VAC	380
From 374 to 484 VAC	400
	440

### ADJUSTMENT

Trimpot and dipswitch adj.

### HOUSING

Rail mounting.(internal transformer)

### SIZE

45 mm. 2 C/O

### CODE END

