



Sample image





Datasheet






Article number: 70023747


Designation: KG32.K400.*KL10.DE11

Description: Switchgear

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107				
Rated insulation voltage Ui				
Voltage (V) AC / DC				
690 AC				
Rated uninterrupted current Iu/Ith				
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements	
32	50	55	Ambient temperature +50°C during 24 hours with peaks up to +55°C	
Rated operational current Ie				
Utilization category		Voltage (V)		Current (A)
AC-32A		20 - 400		32
Rated operational power				
Utilization category	Voltage (V)	No. of phases	No. of poles	Power (kW)
AC-3	220 - 240	3	3	5,50
AC-3	380 - 440	3	3	7,50
AC-3	660 - 690	3	3	7,50
AC-23A	220 - 240	3	3	5,50
AC-23A	380 - 440	3	3	11
AC-23A	660 - 690	3	3	11
Max. Fuse rating IEC				
Fuse characteristic		No. of Fuses		Current (A)
gG		1		35
UL60947-4-1 , UL508				
Nominal Voltage				
Voltage (V) AC / DC				
600 AC				
Rated insulation voltage Ui				
Voltage (V) AC / DC				
600 AC				
Rated thermal current				
Current (A)		Ambient temperature (°C)		Additional Text
30		0 - 40		–
Horsepower rating				
Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)
DOL	110 - 120	1	2	1,50
DOL	200 - 208	1	2	3
DOL	220 - 240	1	2	5
DOL	277 - 277	1	2	5
DOL	415 - 415	1	2	5
DOL	440 - 480	1	2	7,50
DOL	550 - 600	1	2	7,50
DOL	110 - 120	3	3	3
DOL	200 - 240	3	3	10
DOL	415 - 415	3	3	10
DOL	440 - 480	3	3	20
DOL	550 - 600	3	3	25
Pilot duty rating code				
Duty Code				
A600				
SCCR / Max. fuse rating				
Conditions of acceptability				
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.				
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes at 600V max., when protected by 40A Class J fuses.				
Temp. rating of wire				
Temperature rating (°C)		Current (A) Text		
60 - 75		– –		
General Use				
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles
AC	277	30	1	1
No. of contacts in series				


General Use								
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series			
AC	600	30	1	2	1			
AC	600	30	3	3	1			
General Information								
Text								
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.								
- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.								
CSA								
Nominal Voltage								
				Voltage (V)	AC / DC			
				600	AC			
Rated insulation voltage Ui								
				Voltage (V)	AC / DC			
				600	AC			
Rated thermal current								
		Current (A)	Ambient temperature (°C)		Additional Text			
		30	0 - 40		-			
Horsepower rating								
Across-the-Line Motor Starting				Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL				110 - 120	1	2	1,50	40
DOL				220 - 240	1	2	5	40
DOL				277 - 277	1	2	5	40
DOL				415 - 415	1	2	5	40
DOL				440 - 480	1	2	7,50	40
DOL				550 - 600	1	2	7,50	40
DOL				110 - 120	3	3	3	40
DOL				220 - 240	3	3	10	40
DOL				415 - 415	3	3	10	40
DOL				440 - 480	3	3	20	40
DOL				550 - 600	3	3	25	40
Pilot duty rating code								
Duty Code								
A600								
Temp. rating of wire								
			Temperature rating (°C)	Current (A)		Text		
			75	-		-		
General Use								
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series			
AC	277	30	1	1	1			
AC	600	30	1	2	1			
AC	600	30	3	3	1			
GENERAL TECHNICAL INFORMATION								
Size of conductor								
composition of conductor	Min. / Max. value	No. of conductor per terminal		Cross section (mm²) or (AWG/kcmil)		Material of the wire		
Solid wire	Min.	1		0.75mm²		Copper		
Solid wire	Min.	2		0.5mm²		Copper		
Flexible wire	Min.	2		0.75mm²		Copper		
Flexible wire	Max.	1		AWG 10		Copper		
Flexible wire	Max.	1		4mm²		Copper		
Flexible wire	Min.	1		1.5mm²		Copper		
Single-core or stranded wire	Max.	1		6mm²		Copper		
Single-core or stranded wire	Max.	1		AWG 10		Copper		
Flexible wire with sleeve	Max.	1		4mm²		Copper		
Flexible wire with ferrule according to DIN 46228	Min.	1		0.75mm²		Copper		
Flexible wire with ferrule according to DIN 46228	Min.	2		0.5mm²		Copper		
Stripping length								
Length (mm) --								
								
Recommended screw driver								
Type of screw driver	Value							
Cross Screwdriver	PH2							
Slot screwdriver according to DIN 5264	0,8x4							
Tightening torque of screws								
				tightening torque (Nm)	tightening torque (lb-in)			
				1,25	11			
Approbations								
Specification					Marking			
EAC								
CE marking								
UK Directives								

Approbations		Marking
Specification		
UL 60947-4-1; CSA C22.2 No. 60947-4-1		
CSA C.22.2 No.14		
GB/T14048.3		
General Information		
Text		
<ul style="list-style-type: none">- Use only copper wires with or without tinned/silver-plated individual wires. Soldering the end of the wire before wiring is not allowed.- EMC Note: This device is suitable for use in environment A and B.- Terminals with factory fitted jumper links are tightened during production for loss prevention. When opening the terminal clamps, make sure that no factory fitted links get lost and that all wire connections are properly seated.- After wiring, ALL terminal screws must be tightened to the specified torque values.- The protection class of the selected mounting type may vary if optional extras are used.- Do not lubricate or treat contacts.- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.		
Waste Electrical & Electronic Equipment (WEEE)		
Picture name	Description	
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com	
Proposition 65		
Picture name	Description	
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .	
Classification Contact: Rigid contact bridge		
Classification Contact Mat: Silver		
Classification Terminal: Screw terminal		

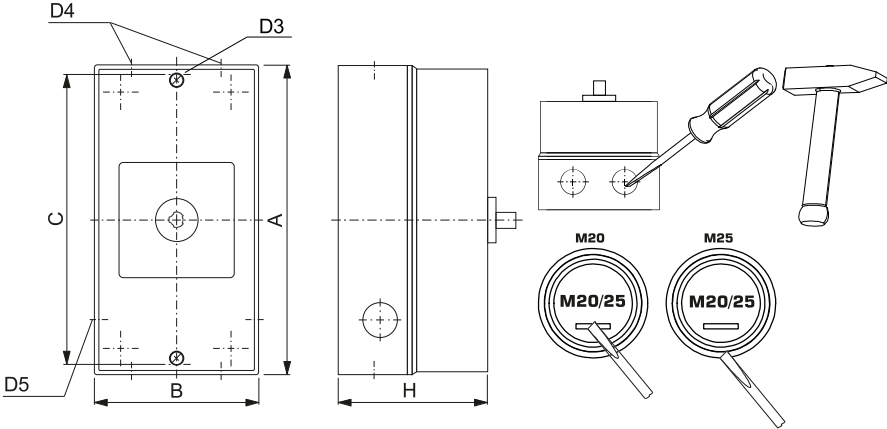Mounting-KL10		
		
IP - Code front side	IP66, IP67, IP69k	
Stages	1,00 - 5,00	
A	H	160,00 mm
B	H	85,00 mm
C	H	150,00 mm
D3	Ø	4,20 mm
D4	Ø	4,00 x M20/M25
D5	Ø	2,00 x M20
H	H	80,00 mm


Wiring diagram

KG32.K400.KL10

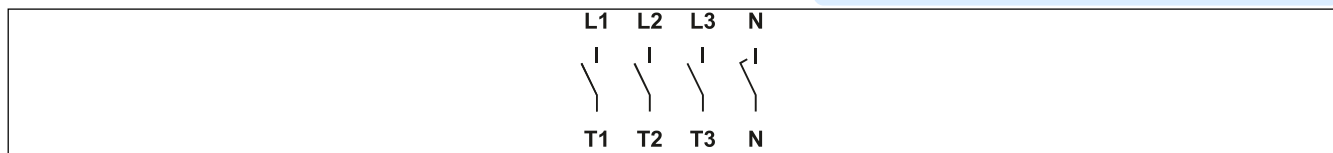

Face plate

S1.F056/C10.V11H

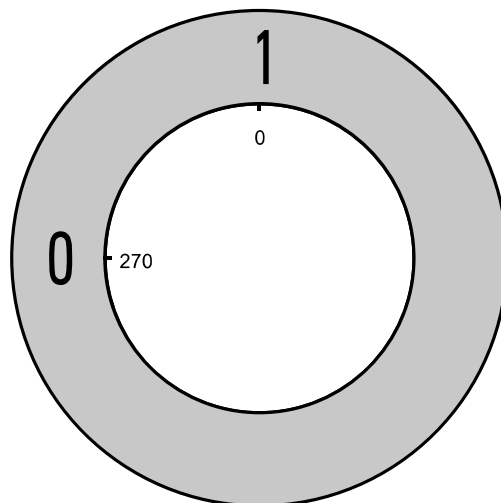



Sample image

PADLOCK DEVICE

with F-handle ring

Designation: S1.V840G/A71/D2



Color of F-handle ring: "A" black


Color of face plate ring: "7" electric gray

Locking position: "1" at 270° (1x90°)

Type of mounting: "D" for type of mounting KS, KL

Switch type: "2" for KA-, KG- and KH(R)-switches

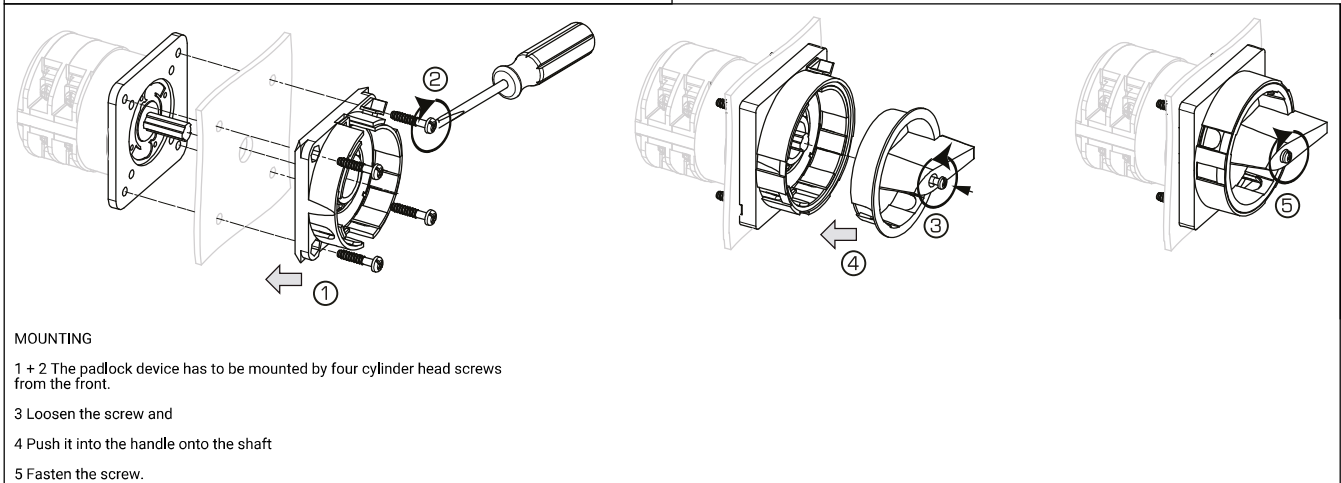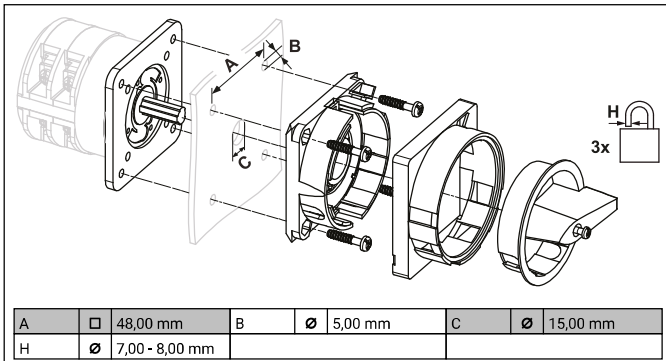

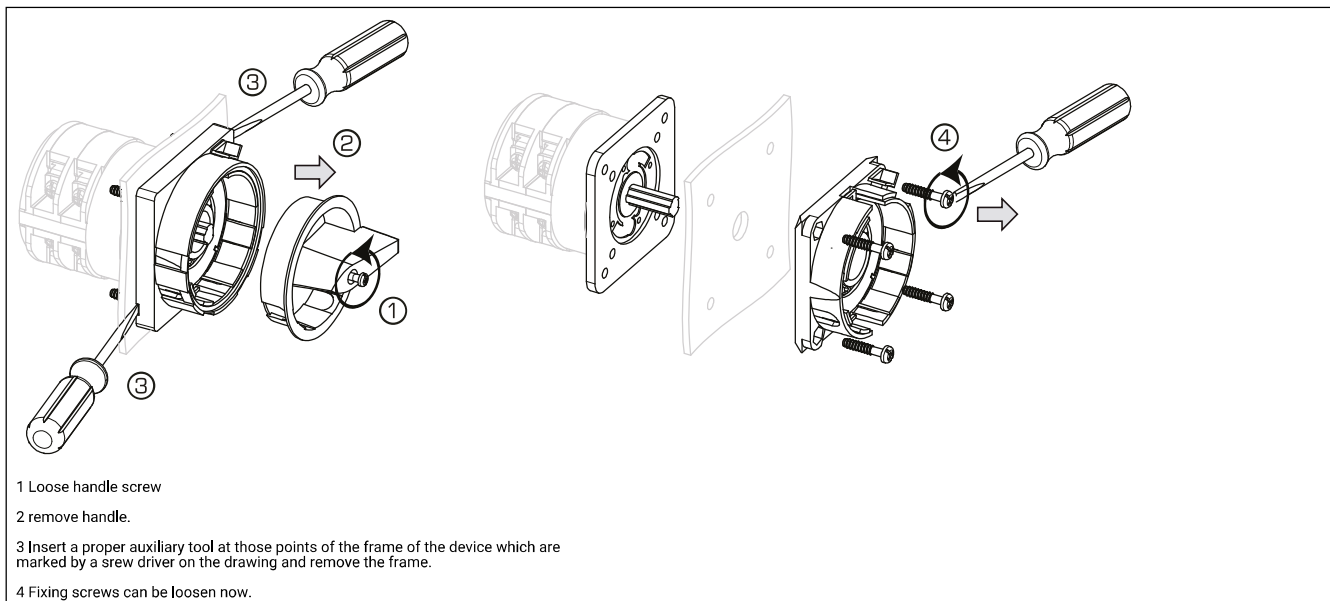

AUXILIARY CONTACTS

(cam operated) for switch type KG20 - KG100C
and KH(R)16 - KH(R)25B


Designation: K0.M510A/1AA-B

Number of contacts: "1" 1 auxiliary contact

Operation of contacts: "A" auxiliary contact(s)
closed in pos. 1 (NO)

Type of version: "A" 1. auxiliary contact module

Type of mounting: "-B" for type of mounting VE,
VE2, silver contacts

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107				
Nominal Voltage				
Voltage (V) AC / DC				
440 AC				
Rated uninterrupted current I _u /I _{th}				
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements	
10	55	60	Ambient temperature +55°C during 24 hours with peaks up to +60°C	
Rated operational current I _e				
Utilization category	Voltage (V)			Current (A)
AC-15	110 - 240			2,50
AC-15	380 - 440			1,50
AC-21A	440			10
UL60947-4-1 , UL508				
Rated thermal current				
Current (A)		Ambient temperature (°C) Additional Text		
10		0 - 40 –		
GENERAL TECHNICAL INFORMATION				
Size of conductor				
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)	Material of the wire
Solid wire	Min.	1	0.5mm²	Copper
Solid wire	Min.	2	0.5mm²	Copper
Flexible wire	Min.	1	0.75mm²	Copper
Flexible wire	Min.	2	0.75mm²	Copper
Flexible wire	Max.	2	AWG 16	Copper
Flexible wire	Max.	2	1.5mm²	Copper
Single-core or stranded wire	Max.	2	AWG 14	Copper
Single-core or stranded wire	Max.	2	1.5mm²	Copper
Flexible wire with ferrule according to DIN 46228	Min.	1	0.5mm²	Copper
Flexible wire with ferrule according to DIN 46228	Max.	2	1mm²	Copper
Flexible wire with ferrule according to DIN 46228	Min.	2	0.5mm²	Copper
Stripping length				
Length (mm) --				
				
Recommended screw driver				
Type of screw driver	Value			
Cross Screwdriver	PH1			
Slot screwdriver according to DIN 5264	0,6x3,5			
Tightening torque of screws				
tightening torque (Nm)			tightening torque (lb-in)	
0,40			3,50	
Conditions during transport and storing				
Minimum temperature (°C)		Maximum temperature (°C) additional requirements		
-40		85 In case of temperatures below -5°C no shock load permissible		
General Information				
Text				
<ul style="list-style-type: none">- Use only copper wires with or without tinned/silver-plated individual wires. Soldering the end of the wire before wiring is not allowed.- Terminals with factory fitted jumper links are tightened during production for loss prevention. When opening the terminal clamps, make sure that no factory fitted links get lost and that all wire connections are properly seated.- After wiring, ALL terminal screws must be tightened to the specified torque values.- Do not lubricate or treat contacts.- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.				
Classification Terminal: Screw terminal				

13	
14	