

BATTERY SYMMETRY MONITORING RELAY

Type: BVSA

FEATURES

- Supply from the battery
- LEDs indicate the status and the fault conditions
- Latch for symmetry failure
- Adjustable symmetry level
- Adjustable Timeoff delay to prevent false alarm
- Test and reset button on the relay
- Terminals for remote test and reset

Description:

The BVSA is designed to give an early warning for cells, in a battery system, that are performing different from the other cells. The battery system being monitored must consist of two equal blocks coupled in series with an accessible centerpoint.


Operation:

The measuring system is based on a comparison of the voltage from the two blocks. Over the lifetime they are charged and discharged equally and the voltage will, within close limits, be the same as long as all cells in both blocks are healthy. At the end of the lifetime, or if a cell is shorted, the two blocks will perform different. The BVSA will sense the difference in performance and the internal relay will give an early warning by dropping out. Information about which battery block that is defect is indicated by the LEDs on the front. In order to prevent false alarm the BVSA includes a timing function.

Application:


Detection of an early failure in battery cells within a battery system. For a complete monitoring system the BVSA can be used together with a standard battery voltage monitoring relay - type BMCD (HI/LOW)

FUNCTION DIAGRAM

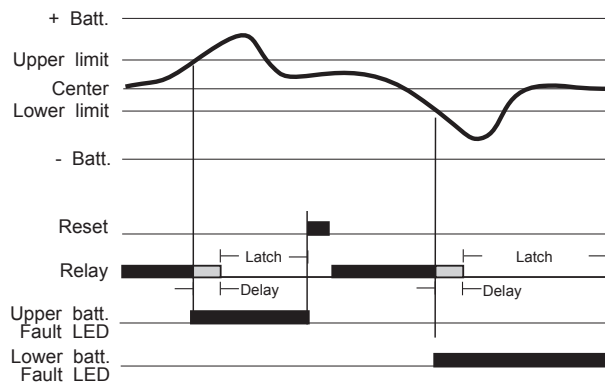


CONNECTION DIAGRAM

Rail mounting

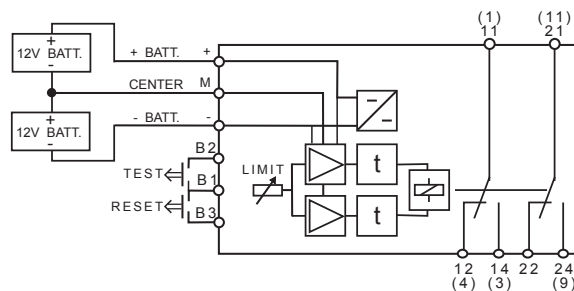

Socket mounting

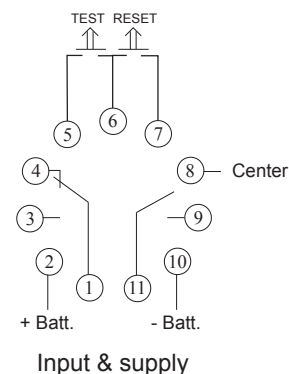

SPECIFICATIONS

INPUT

PERFORMANCE PARAMETERS

Time range off delay	0 - 10 sec. adjustable
standart	- 20 % to + 50 %
Time range accuracy	
ELECTRICAL	
Repeat accuracy	< 1 %
Temp. dependence	Typ. ± 0.02 % / °C

OUTPUT

Under voltage	Relay, 2 C/O, AgCdO
Contact rating	6 A, 250 VAC, 1500 W
Mechanical life	30 Million operations

SUPPLY

DC voltage, supply and input
internal connected
12 V (From 8 to 16 V)
24 V (From 16 to 32 V)
48 V (From 32 to 64 V)

Power consumption	3 W
-------------------	-----

GENERAL

Temperature range	- 25 °C to + 55 °C	
Humidity	Up to 90 % RH non-condensing	
Dielectric test voltage	Coil to relay contacts	4000 VAC
	Pole to pole	2500 VAC
Weight	0.13 kg	



EMC directive 89/336:

International Standards
EN50081 - Emission
EN50082 - Immunity

ORDERING INFORMATION

EXAMPLE:

TYPE
Battery voltage symmetry monitoring relay

VOLTAGE RANGE

12 V
24 V
48 V

ADJUSTMENT

Trimpot adj.

HOUSING

Rail mounting
Socket 11 pin

SIZE

35 mm.

CODE

Extend code
Code end

DELAY

(standart adjustable 0-10sec.)

In seconds
(standart adjustable 0-10sec.)
adjustable 0-20sec.
adjustable 0-30sec.

