


# IKS-G6524A/G6824A Series

## 24G-port Layer 2 / Layer 3 full Gigabit managed Ethernet switches



\*Available in Q3, 2014

- > Layer 3 routing interconnects multiple LAN segments (IKS-G6824A series)
- > 24 Gigabit Ethernet ports
- > Up to 24 optical fiber connections (SFP slots)
- > Fanless, -40 to 75°C operating temperature range (T models)
- > Turbo Ring and Turbo Chain (recovery time < 50 ms @ 250 switches), RSTP/STP, and MSTP for network redundancy
- > Isolated redundant power inputs with universal 110/220 VAC power supply range



### Introduction

Process automation and transportation automation applications combine data, voice, and video, and consequently require high performance and high reliability. The IKS-G6524A/G6824A series full Gigabit backbone switches are equipped with 24 Gigabit Ethernet ports, and support Layer 3 routing functionality to facilitate the deployment of applications across networks, making them ideal for large scale industrial networks. The IKS-G6524A/G6824A's full Gigabit

capability increases bandwidth to provide high performance and the ability to quickly transfer large amounts of video, voice, and data across a network. The switches support the Turbo Ring, Turbo Chain, and RSTP/STP redundancy protocols, and are fanless and come with an isolated redundant power supply to increase system reliability and the availability of your network backbone.

### Features and Benefits

- Layer 3 switching functionality to move data and information across networks (IKS-G6824A series)
- Command line interface (CLI) for quickly configuring major managed functions
- Supports advanced VLAN capability with Q-in-Q tagging
- Software based IEEE 1588 PTPv2 (Precision Time Protocol) for precise time synchronization of networks
- DHCP Option 82 for IP address assignment with different policies
- Support EtherNet/IP and Modbus/TCP protocols for device management and monitoring
- Compatible with EtherNet/IP and PROFINET protocols for transparent data transmission
- Redundant Gigabit Turbo Ring and Turbo Chain (recovery time < 50 ms @ 250 switches), RSTP/STP, and MSTP for network redundancy
- IGMP snooping and GMRP for filtering multicast traffic
- IEEE 802.1Q VLAN and GVRP protocol to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- Port Trunking for optimum bandwidth utilization
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- Access control lists (ACL) increase the flexibility and security of network management (IKS-G6824A series)
- SNMPv1/v2c/v3 for different levels of network management
- RMON for efficient network monitoring and proactive capability
- Bandwidth management prevents unpredictable network status
- Lock port function for blocking unauthorized access based on MAC address
- Port mirroring for online debugging
- Automatic warning by exception through e-mail, relay output
- Digital inputs for integrating sensors and alarms with IP networks
- Redundant, dual AC power inputs

### Specifications

#### Technology

#### Standards:

- IEEE 802.3 for 10BaseT
- IEEE 802.3u for 100BaseT(X) and 100BaseFX
- IEEE 802.3ab for 1000BaseT(X)
- IEEE 802.3z for 1000BaseSX/LX/LHX/ZX
- IEEE 802.3x for Flow Control
- IEEE 802.1D-2004 for Spanning Tree Protocol
- IEEE 802.1w for Rapid Spanning Tree Protocol
- IEEE 802.1s for Multiple Spanning Tree Protocol

- IEEE 802.1Q for VLAN Tagging
- IEEE 802.1p for Class of Service
- IEEE 802.1X for Authentication
- IEEE 802.3ad for Port Trunk with LACP
- Protocols:** IGMPv1/v2, GMRP, GVRP, SNMPv1/v2c/v3, DHCP Server/Client, BootP, TFTP, SNTP, SMTP, RARP, RMON, HTTP, HTTPS, Telnet, Syslog, DHCP Option 66/67/82, SSH, LLDP, IEEE 1588 PTP V2, EtherNet/IP, Modbus/TCP, SNMP Inform, NTP Server/Client, IPv6 (IKS-G6524A series)
- Layer 3 Switching:** Static routing, RIP V1/V2, OSPF, DVMRP, PIM-DM, PIM-SM, PIM-SSM (IKS-G6824A series)

**Layer 3 Switching Redundancy:** VRRP (IKS-G6824A series)  
**MIB:** MIB-II, Ethernet-like MIB, P-BRIDGE MIB, Q-BRIDGE MIB, Bridge MIB, RSTP MIB, RMON MIB Groups 1, 2, 3, 9  
**Flow Control:** IEEE 802.3x flow control, back pressure flow control

**Switch Properties**

**Priority Queues:** 8  
**Max. Number of Available VLANs:** 256  
**VLAN ID Range:** VID 1 to 4094  
**IGMP Groups and Multicast Route:** 1000  
**MAC Table Size:** 16 K  
**Packet Buffer Size:** 12 Mbit  
**DRAM Size:** 128 MB  
**Flash Size:** 16 MB  
**Jumbo Frame Size:** 9.6 KB  
**Switching Fabric Capacity:** 48 Gbps  
**Forwarding Rate:** 35.7 Mpps (packets per second)

**Interface**

**Gigabit Ethernet:** 10/100/1000BaseT(X) or 100/1000BaseSFP slot  
**Console Port:** USB-serial console (Type B connector)  
**Storage Port:** USB storage (Type A connector for ABC-02-USB)  
**LED Indicators:** STATE, PWR1, PWR2, FAULT, MSTR/HEAD, CPLR/ TAIL  
**Alarm Contact:** 1 relay output with current carrying capacity of 2 A @ 30 VDC  
**Digital Inputs:** 1 input with the same ground, but electrically isolated from the electronics.  
 • +13 to +30V for state “1”  
 • -30 to +1V for state “0”  
 • Max. input current: 8 mA

**Power Requirements**

**Input Voltage:** 110/220 VAC (85 to 264 VAC)  
**Input Current:** Max. 0.79/0.44 A @ 110/220 VAC  
**Overload Current Protection:** Present  
**Reverse Polarity Protection:** Present

**Physical Characteristics**

**Housing:** IP30 protection  
**Dimensions:** 440 x 44 x 386.9 mm (17.32 x 1.73 x 15.23 in)  
**Weight:** 5.1 kg  
**Installation:** 19” rack mounting

**Environmental Limits**

**Operating Temperature:**  
 Standard Models: -10 to 60°C (14 to 140°F)  
 Wide Temp. Models: -40 to 75°C (-40 to 167°F)  
**Storage Temperature:** -40 to 85°C (-40 to 185°F)  
**Ambient Relative Humidity:** 5 to 95% (non-condensing)

**Standards and Certifications**

**Safety:** UL 60950-1, EN 60950-1  
**EMI:** FCC Part 15 Subpart B Class A, EN 55022 Class A  
**EMS:**  
 EN 61000-4-2 (ESD) Level 3, EN 61000-4-3 (RS) Level 3,  
 EN 61000-4-4 (EFT) Level 3, EN 61000-4-5 (Surge) Level 3,  
 EN 61000-4-6 (CS) Level 3, EN 61000-4-8, EN 61000-4-11  
**Rail Traffic:** EN 50121-4  
**Shock:** IEC 60068-2-27  
**Freefall:** IEC 60068-2-32  
**Vibration:** IEC 60068-2-6  
*Note: Please check Moxa's website for the most up-to-date certification status.*

**MTBF (mean time between failures)**


**Time:**  
 IKS-G6524A: 282,390 hrs  
 IKS-G6824A: 280,035 hrs  
**Database:** Telcordia (Bellcore), GB

**Warranty**

**Warranty Period:** 5 years  
**Details:** See [www.moxa.com/warranty](http://www.moxa.com/warranty)

**Dimensions**

Unit: mm (inch)

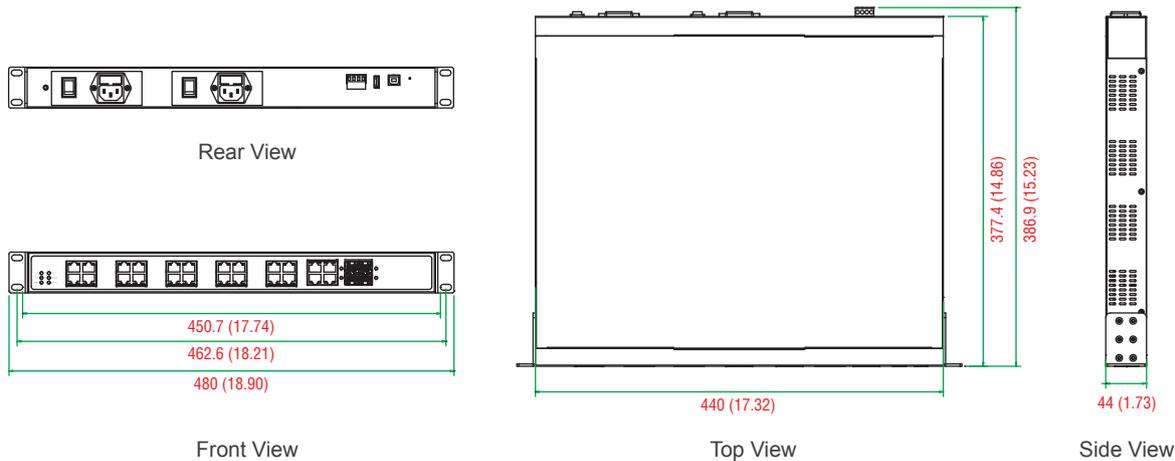

## Ordering Information

Available Models		Port Interface			Power Supply	
Standard Temperature (-10 to 60°C)	Wide Temperature (-40 to 75°C)	Gigabit Ethernet			Isolated Power Supply 1	Isolated Power Supply 2
		10/100/1000 BaseT(X)	100/1000 BaseSFP*	Combo Port, 10/100/1000 BaseT(X) or 100/1000 BaseSFP*	HV: 85 to 264 VAC	HV: 85 to 264 VAC
<b>IKS-G6524A Series Layer 2 Switches</b>						
IKS-G6524A-4GTXSFP-HV-HV	IKS-G6524A-4GTXSFP-HV-HV-T	20	–	4	1	1
IKS-G6524A-8GSFP-4GTXSFP-HV-HV	IKS-G6524A-8GSFP-4GTXSFP-HV-HV-T	12	8	4	1	1
IKS-G6524A-20GSFP-4GTXSFP-HV-HV	IKS-G6524A-20GSFP-4GTXSFP-HV-HV-T	–	20	4	1	1
<b>IKS-G6824A Series Layer 3 Switches</b>						
IKS-G6824A-4GTXSFP-HV-HV	IKS-G6824A-4GTXSFP-HV-HV-T	20	–	4	1	1
IKS-G6824A-8GSFP-4GTXSFP-HV-HV	IKS-G6824A-8GSFP-4GTXSFP-HV-HV-T	12	8	4	1	1
IKS-G6824A-20GSFP-4GTXSFP-HV-HV	IKS-G6824A-20GSFP-4GTXSFP-HV-HV-T	–	20	4	1	1

\*The IKS-G6524A/G6824A series supports 100/1000BaseSFP slots. See SFP-1G, SFP-1G Copper, and SFP-1FE datasheets for SFP module product information.

### Optional Accessories (can be purchased separately)

**MXview:** Moxa industrial network management software with 50, 100, 250, 500, 1000, or 2000 nodes

**EDS-SNMP OPC Server Pro:** OPC server software that works with all SNMP devices

**ABC-02-USB:** Configuration backup and restoration tool for managed Ethernet switches, 0 to 60°C operating temperature

**Power Cords:** See Appendix A for details

### Package Checklist

- IKS-G6524A or IKS-G6824A switch
- USB cable (Type A male to Type B male)
- 2 power cords (US type x 1, EU type x 1)
- Protective caps for unused ports
- 2 rackmount ears
- Documentation and software CD
- Hardware installation guide (printed)
- Warranty card