

EXPC-1519 Series

Zone 2 19-inch panel computers with multiple connectivity options



- > Anti-scratch, 19-inch sunlight viewable, 1000 nits LCD panel
- > High performance Intel® 3rd generation Core™ i7-3555LE or Celeron 1047UE CPU
- > Fanless design with highly efficient heat dissipation
- > -40 to 70°C extended operation temperature
- > Multi-touch with glove-friendly touch screen interface
- > Options of cable gland and standard USB Type A/RJ-45 connectors
- > Totally sealed IP66 / NEMA 4X enclosure
- > Class 1 Division 2, ATEX Zone 2*, and IECEx* certified
- > Dual AC/DC power supply
- > Optional WLAN, 100M Fiber optic connection

*Certification is underway. Please check Moxa's website for the most up-to-date certification status.



Introduction

The EXPC-1519 panel computers are Zone 2 certified for both indoor and outdoor hazardous environments. The EXPC-1519 series features Intel® 3rd generation Core™ i7-3555LE 2.5GHz or Celeron 1047UE 1.4GHz processor, with up to 16 GB of memory to deliver high performance processing.

The EXPC-1519 series offers flexible interface connectivity options to meet your application needs: standard connectors with cable glands, terminal block with cable glands, and standard connectors on the bottom panel.

The EXPC-1519 computers are designed with wide temperature range (-40 to 70°C) and come with a patented, fanless, streamlined enclosure designed for highly efficient heat dissipation, making this one of the most reliable industrial platforms available for harsh, hot outdoor environments like oil and gas fields, or drilling platforms.

In addition, the EXPC-1519 computers feature touchscreen controls with anti-reflection treatment and 1000 nits LED backlight, making them easy to read even during the peak daylight hours.

Specifications

Computer

CPU: Intel® Core™ i7-3555LE 2.5GHz or Intel® Celeron® 1047UE 1.4GHz Processor

OS: Windows Embedded Standard 7 32/64-bit, Windows 7 Professional 32/64-bit

System Chipset: Intel® QM77 Express Chipset (Intel® BD82QM77 PCH)

BIOS: 64 Mbit SPI Flash

Graphics Controller: Intel® HD Graphics 4000

System Memory: 2 SO-DIMM slot, DDR3/DDR3L support, 4 GB pre-installed, maximum 16 GB capacity

Expansion Bus: 1 mini PCIe socket

Touchscreen: Projected capacitive touch, 7H surface hardness, anti-reflection treatment, glove-friendly

Storage

HDD Support: 2.5" SATA, 7 or 9.5 mm in height, access externally

CFast : Push-push type, access externally

Display

Panel Size: 19-inch SXGA, 1000 nits LED backlit LCD

Aspect Ratio: 5:4

Response Time: 5 ms

Contrast Ratio: 1000:1

Viewing Angles:

• Horizontal: 170° (left to right)

• Vertical: 160° (up to down)

Max Colors: 16.7 M colors

Resolution:

• VGA: 640 x 480

• SVGA: 800 x 600

• XGA: 1024 x 768

• SXGA: 1280 x 1024

Serial Communication Parameters

Data Bits: 5, 6, 7, 8

Stop Bits: 1, 1.5, 2

Parity: None, Even, Odd, Space, Mark

Flow Control: RTS/CTS, XON/XOFF

Baudrate: 50 bps to 115.2 Kbps

Serial Signals

RS-232: TxD, RxD, DTR, DSR, RTS, CTS, DCD, GND

RS-422: TxD+, TxD-, RxD+, RxD-, GND

RS-485-4w: TxD+, TxD-, RxD+, RxD-, GND

RS-485-2w: Data+, Data-, GND

Interface (EXPC-1519-C1-S1/EXPC-1519-C7-S1)

Connector type: On motherboard via cable glands

USB: 3 USB 2.0 hosts, Type A connectors

VGA: 15-pin D-Sub connector (DB15 female), with resolution up to 2048x1536 pixels with 32-bit color at 75 Hz

Serial Port: 2 RS-232/422/485 ports, software-selectable (DB9 male)

Ethernet: 2 auto-sensing 10/100/1000 Mbps ports (RJ45)

Optical Fiber: 2 multimode 100M fiber optic ports

AC: 100 to 240 VAC (3-pin terminal block)

DC: 24 VDC (2-pin terminal block)

Interface (EXPC-1519-C1-S2/EXPC-1519-C7-S2)

Connector Type: On terminal block via cable glands

USB: 4 USB 2.0 hosts, terminal block

Serial Port: 2 RS-232/422/485 ports (terminal block), software-selectable

Ethernet: 2 auto-sensing 10/100/1000 Mbps ports (terminal block)

Optical Fiber : 2 multimode 100M fiber optic ports

AC: 100 to 240 VAC (3-pin terminal block)

DC: 24 VDC (2-pin terminal block)

Interface (EXPC-1519-C1-S3/EXPC-1519-C7-S3)

Connector Type: On bottom panel

USB: 1 USB 2.0 hosts, Type A connector

Ethernet: 1 auto-sensing 10/100/1000 Mbps port (RJ45)

AC: 100 to 240 VAC (3-pin terminal block)

DC: 24 VDC (2-pin terminal block)

LEDs and Buttons

System LEDs: Power, Fiber1, Fiber2, LAN1, LAN2, Touch, Info, DAY, Dusk, Night

LAN LEDs: 100M/Link, 1000M/Link (on each RJ-45 connector)

Buttons: Power, Brightness +/-, Fn, Touch, Info, Brightness mode

Physical Characteristics

Housing: Aluminum

Weight: 10.7 kg

Dimensions: 483 x 408 x 99.5 mm (19.02 x 16.06 x 3.92 in)

Mounting: VESA mounting (100 x 100 mm), desktop mounting, yoke mounting, wall mounting, and panel mounting

Environmental Limits

Operating Temperature: -40 to 70°C (-40 to 158°F)

Storage Temperature: -40 to 70°C (-40 to 158°F)

Ambient Relative Humidity: 5 to 95% (non-condensing)

Anti-Vibration: 2 g rms, 5-500 Hz frequency, compliant with IEC 60068-2-6 standard

Anti-Shock: 20 g rms, half sine wave under system operating, 11 ms duration, compliant with IEC 60068-2-27 standard

Power Requirements

Rated Voltage: 100 to 240 VAC or 24 VDC (18 to 32 VDC, 2-pin terminal block)

Power Consumption: 100 to 240 VAC, 47 to 63 Hz, 1 A (less than 100 W) or 24 VDC, 6 A (less than 150 W)

Standards and Certifications

Safety: UL 60950-1, IEC 60950-1

Hazardous Environments: Class 1 Division 2

EMC: EN 55022/24

EMI: CISPR 22, FCC Part 15B Class A

EMS:

- IEC 61000-4-2 ESD: Contact 4 kV; Air 8 kV
- IEC 61000-4-3 RS: 3 V/m (80 MHz to 1 GHz)
- IEC 61000-4-4 EFT: Power 1 kV; Signal 0.5 kV
- IEC 61000-4-5 Surge: AC Power 2 kV; Signal 1 kV; DC Power 1 kV; Signal 1 kV
- IEC 61000-4-6 CS: 3 V
- IEC 61000-4-8, IEC 61000-4-11

Ingress Protection Rating: IP66 / NEMA 4X

Green Product: RoHS, cRoHS, WEEE


Warranty

Warranty Period: 3 years for computer system, 1 year for LCD panel

Details: See www.moxa.com/warranty


Dimensions

Unit: mm (inch)

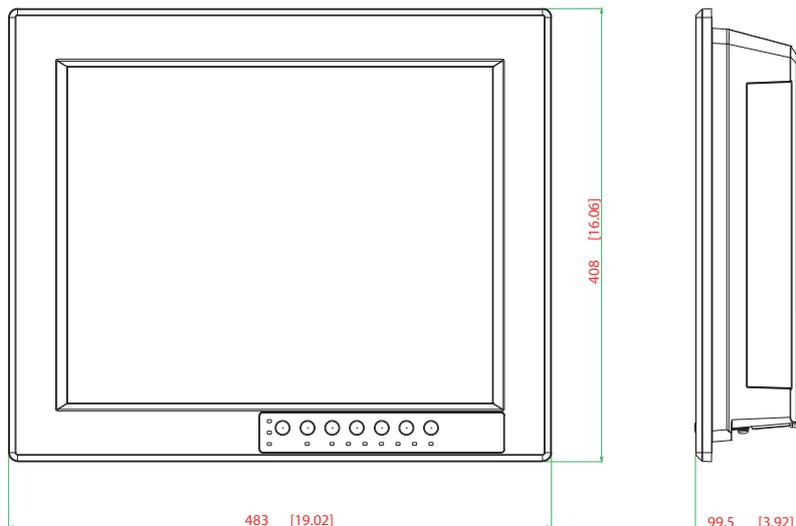


Appearance



Front View

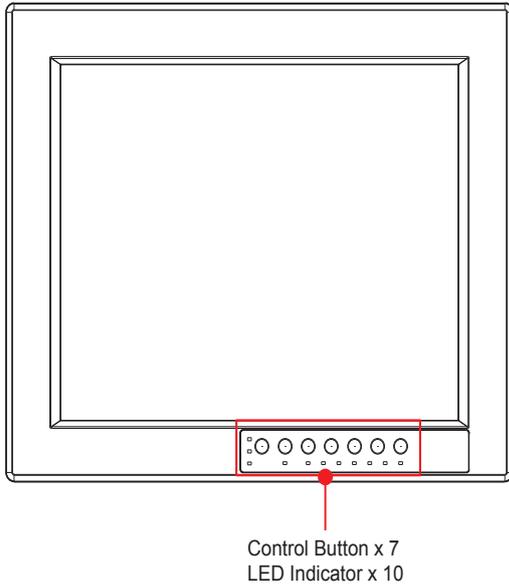


Bottom View (EXPC-1519-C1-S1-T, EXPC-1519-C7-S1-T, EXPC-1519-C1-S2-T, EXPC-1519-C7-S2-T)

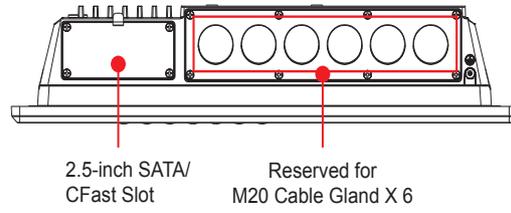


Bottom View (EXPC-1519-C1-S3-T, EXPC-1519-C7-S3-T)

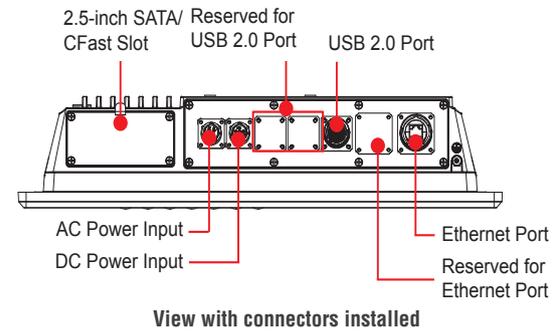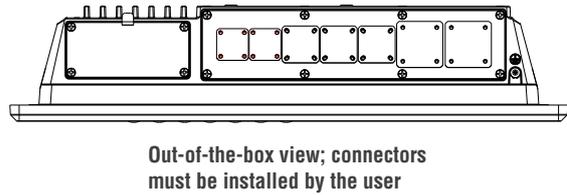


Rear View (EXPC-1519-C1-S1-T, EXPC-1519-C7-S1-T)

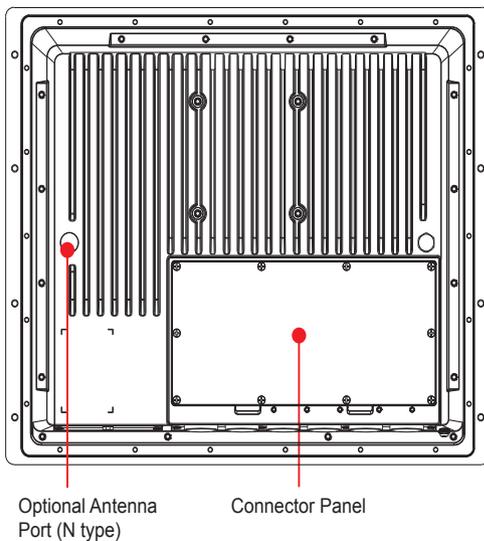

*Viewed at a 5-degree angle

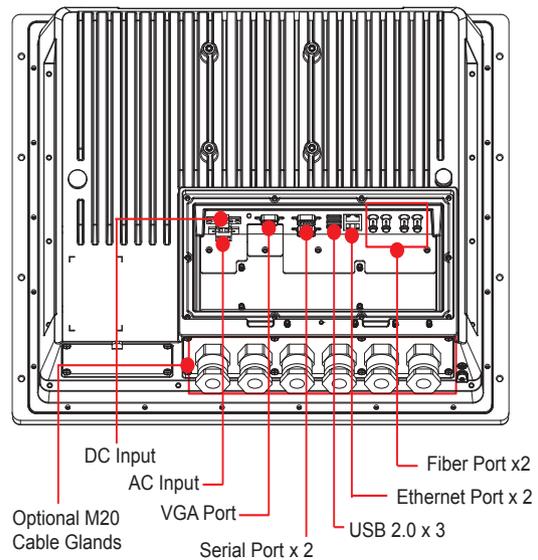


Rear View (EXPC-1519-C1-S2-T, EXPC-1519-C7-S2-T)

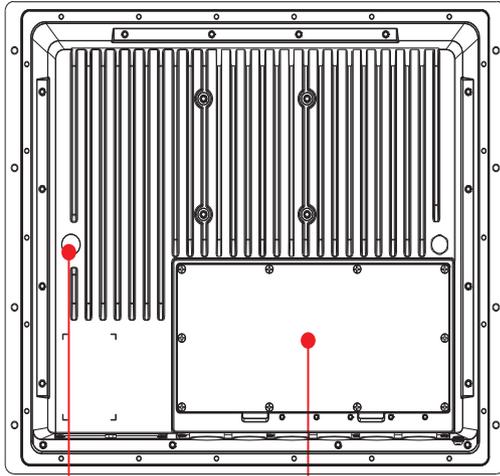


Optional Antenna Port (N type) Connector Panel

*Viewed at a 5-degree angle

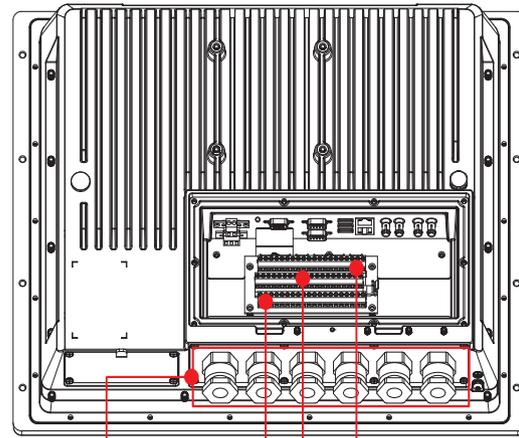


Optional M20 Cable Glands Serial Port x 2 Ethernet Port x 2 USB 2.0 x 4

Rear View (EXPC-1519-C1-S3-T, EXPC-1519-C7-S3-T)

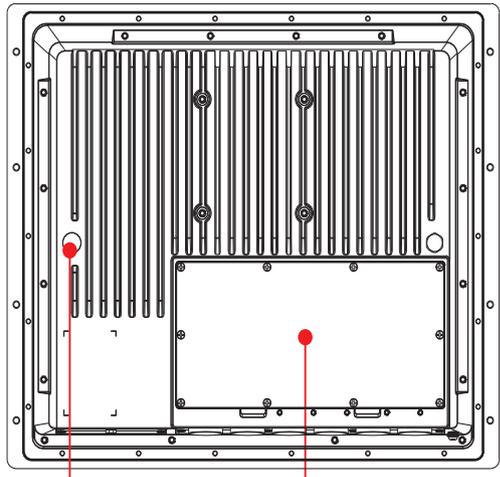

Optional Antenna Port (N type) Connector Panel

*Viewed at a 5-degree angle

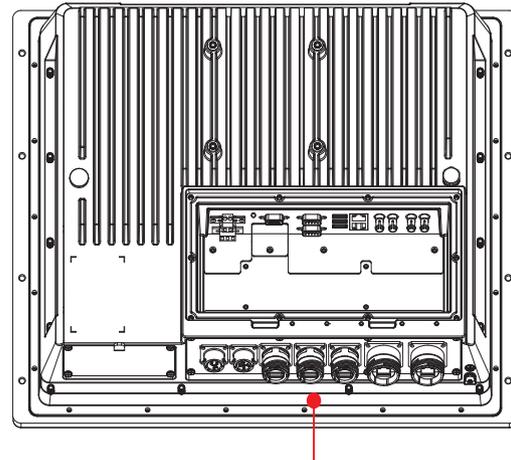

Connectors (must be installed by the user)

Ordering Information

Available Models

EXPC-1519-C1-S1-T: Fanless, Zone 2 19-inch 1000 nits LCD panel computer, Intel® Celeron® Processor 1047UE 1.4GHz, cable gland with standard I/O design, projected capacitive touch screen, IP66, -40 to 70°C operating temperature, 2.5" SSD tray and CFast slot

EXPC-1519-C1-S2-T: Fanless, Zone 2 19-inch 1000 nits LCD panel computer, Intel® Celeron® Processor 1047UE 1.4GHz, cable gland with terminal block I/O design, projected capacitive touch screen, IP66, -40 to 70°C operating temperature, 2.5" SSD tray and CFast slot

EXPC-1519-C1-S3-T: Fanless, Zone 2 19-inch 1000 nits LCD panel computer, Intel® Celeron® Processor 1047UE 1.4GHz, harsh environment I/O connector, projected capacitive touch screen, IP66, -40 to 70°C operating temperature, 2.5" SSD tray and CFast slot

EXPC-1519-C7-S1-T: Fanless, Zone 2 19-inch 1000 nits LCD panel computer, Intel® Core™ i7-3555LE Processor 2.5GHz, cable gland with standard I/O design, projected capacitive touch screen, IP66, -40 to 70°C operating temperature, 2.5" SSD tray and CFast slot

EXPC-1519-C7-S2-T: Fanless, Zone 2 19-inch 1000 nits LCD panel computer, Intel® Core™ i7-3555LE Processor 2.5GHz, cable gland with terminal block I/O design, projected capacitive touch screen, IP66, -40 to 70°C operating temperature, 2.5" SSD tray and CFast slot

EXPC-1519-C7-S3-T: Fanless, Zone 2 19-inch 1000 nits LCD panel computer, Intel® Core™ i7-3555LE Processor 2.5GHz, harsh environment I/O connector, projected capacitive touch screen, IP66, -40 to 70°C operating temperature, 2.5" SSD tray and CFast slot

Package Checklist (EXPC-1519-C1-S3-T, EXPC-1519-C7-S3-T)

- 1 EXPC-1519 panel computer
- HDD/SSD installation kit
- USB female connector installation kit
- RJ45 female connector installation kit
- DC power installation kit
- AC power installation kit
- Quick installation guide
- Documentation and software DVD
- Warranty card

Package Checklist (EXPC-1519-C1-S1-T, EXPC-1519-C7-S1-T, EXPC-1519-C1-S2-T, EXPC-1519-C7-S2-T)

- 1 EXPC-1519 panel computer
- SSD/HDD installation kit
- 1 2-pin terminal block for DC power input
- 1 3-pin terminal block for AC power input
- Quick installation guide
- Documentation and software DVD
- Warranty card