

# KPC-1260 Series

12.1" fanless Industrial Panel PC with  
Intel® BayTrail Processors




- 12.1" LCD Display with Resistive 5-wire TouchScreen
- Intel® BayTrail Processors
- Intel® HD Graphics
- IP65 approved front bezel
- 2x GbE, 2x COMs, 4x USB 2.0, 1x USB 3.0, 1x Mini-PCIe slot
- HDMI, VGA, HD Audio
- Fanless design

## Technical Information

<b>CPU Support</b>	Intel® Atom™ BayTrail processors
<b>Memory</b>	1 x DDR3L SODIMM
<b>BIOS</b>	AMI Plug & Play SPI BIOS
<b>Graphic</b>	Intel® HD Graphics
<b>Touch Sensor</b>	5-wire resistive touch sensor
<b>LCD Display</b>	Size: 12.1inch, 4:3 Resolution: 1024 x 768 Backlight: LED Contrast Ratio: 1000:1 (typical) Brightness: 500cd/m2 (typical)
<b>External Display</b>	1 x HDMI 1 x VGA
<b>LAN</b>	2 x Gigabit Ethernet (Realtek RTL8111G) PXE/WOL supported

<b>Audio</b>	Realtek ALC662 HD Codec w/ 2W Audio Amplifier Line-In, Line-Out and Mic-In Supported
<b>Storage</b>	1 x 2.5" SATA HDD or SSD space
<b>USB</b>	4 x USB 2.0, 1 x USB 3.0
<b>COM</b>	2 x COM ports with RS-232/422/485 selection supported
<b>Expansion slot</b>	1 x Mini-PCIe slot
<b>Hardware Monitor</b>	Operating voltage, CPU temperature
<b>Watchdog Timer</b>	1-255 step, can be set with software on Super I/O
<b>Power</b>	DC 12V Input
<b>OS Support</b>	Windows 7, Windows 8
<b>Dimensions</b>	343 x 58 x 269mm (WxHxD)
<b>Environmental Factors</b>	Operation Temp.: 0°C - 50°C Storage Temp.: -20°C - 60°C Humidity: 0% - 95%
<b>Certifications</b>	CE, FCC Class A

## KPC-1260 Series IOs

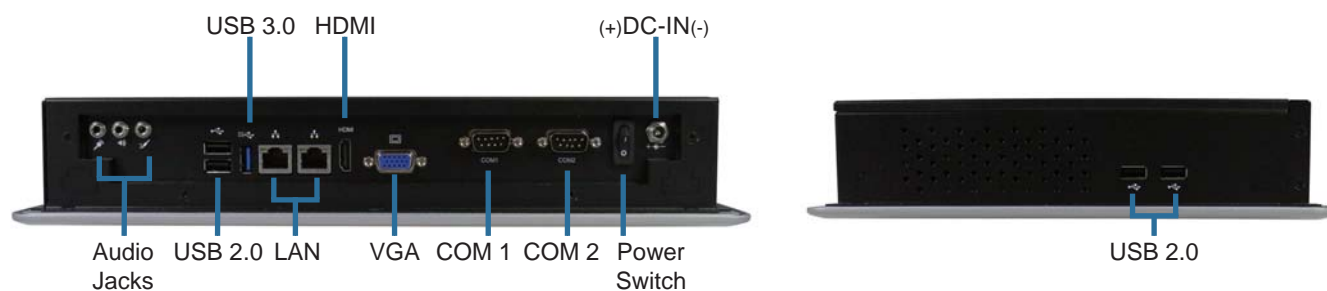

## Ordering Information

Article	Description
KPC-1260*	12" Touch Panel PC, Intel® Celeron® BayTrail Quad Core J1900 Processor, 1x DDR3L SODIMM, 2 x GbE LANs, 1 x mini-PCIe, 2 x COMs, 1 x VGA, 1 x HDMI, 4 x USB 2.0, and 1 x USB 3.0
KPC-1261	12" Touch Panel PC, Intel® Atom™ BayTrail Dual Core E3825 Processor, 1 x DDR3L SODIMM, 2 x GbE LANs, 1 x mini-PCIe, 2 x COMs, 1 x VGA, 1 x HDMI, 4 x USB 2.0, and 1 x USB 3.0

\* : default