

NPort® S9450I Series

4-port rugged device server with managed Ethernet switch



- > 4-port RS-232/422/485 serial interface
- > Supports up to 5 managed Ethernet switch ports (fiber available with some models)
- > Supports DNP3 and Modbus protocols
- > IEC 61850-3, IEEE 1613 compliant (for power substations)
- > Ethernet redundancy with Turbo Ring/Chain and RSTP/STP supported
- > Real COM/TTY drivers for Windows and Linux
- > Supports IEC 61850 MMS protocol
- > Security features based on IEC-62443/NERC CIP
- > -40 to 85°C wide operating temperature



Introduction

The NPort S9450I 4-port RS-232/422/485 device servers, which come with a built-in full-function managed Ethernet switch, are designed specifically for the harsh environmental conditions found in electrical substations. With both fiber and wire Ethernet ports supported, the

combination of device server plus Ethernet switch gives users the ability to easily install, manage, and maintain the NPort S9450I itself, as well as attached serial devices.

Electromagnetic Compatibility for Harsh Substation Environments

The NPort S9000 Series supports a high level of surge protection to prevent damage from the types of power surges and EMI one finds in electrical substations and industrial automation applications. Combined with a -40 to 85°C operating temperature range and galvanized steel housing, the NPort S9000 is suitable for a wide range of industrial environments.

Another plus is the NPort S9000's dual power supplies, which provide both redundancy, as well as a wide range of voltage inputs. The WV models accept a power 24/48 VDC power input (ranging from 18 to 72 VDC), and the HV models accept a power input of 88 to 300 VDC and 85 to 264 VAC.

Power SCADA with IEC 61850 MMS for Easy Maintenance

The current trend in power SCADA applications is to control and monitor both IT devices (switches, routers, etc.) and IEDs (sensors, actuators, etc.) with the MMS protocol. Contrast this with the more traditional management approach of using SNMP for IT devices and MMS for IEDs. In fact, SIs may even need to manage a variety of

legacy devices that use proprietary communications protocols. The NPort S9000 device servers are the world's first device servers to integrate MMS into an IT-type device designed specifically for power SCADA applications. The NPort S9000 even supports using MMS to monitor serial communications between the S9000 and legacy devices.

Supports Modbus/DNP3 Protocol Gateway

The NPort S9000 Series provides maximum flexibility for integrating industrial Modbus/DNP3 networks of all types and sizes. The NPort S9000 is designed to integrate Modbus TCP, ASCII, and RTU devices in almost any master/slave combination, including simultaneous serial

and Ethernet masters. The NPort S9000 device servers also support protocol conversion between DNP3 serial and DNP3 IP. All models are ruggedly constructed and are DIN-rail mountable.

Cybersecurity Features Based on IEC-62443/NERC CIP

The NPort S9450I Series has security features based on IEEE 62443/NERC CIP to provide a high level of cybersecurity. Protecting mission-critical networks from cyberattacks is a high priority for industrial

automation applications, which can suffer large losses due to extended network downtime.

Ring Redundancy at the Device Level

Device-level communication networks for industrial automation are very critical since they are used to control and monitor device processes. The reliability of these communications depends on ring redundancy at the device level, which is designed to provide fast network fault detection and reconfiguration to support the most demanding control applications. The NPort S9000 Series integrates

a full-function NPort device server with an industrial switch to carry serial and Ethernet devices at the same time. In addition, the NPort S9000 can also achieve ring redundancy with standard STP/RSTP and Moxa's proprietary Turbo Ring or Turbo Chain 2 redundancy protocols. This all-in-one design can be used to optimize and simplify your device network and enhance reliability.

General Specifications

Port Summary

Serial Ports: 4 RS-232/422/485 ports

Ethernet Switch Ports:

NPort S9450I all copper models: 5 RJ45 copper ports

NPort S9450I copper/fiber models: 3 RJ45 copper ports, 2 fiber ports

Magnetic Isolation Protection: 1.5 kV built in

Console Ports: 1 (10-pin RJ45 connector)

Physical Characteristics

Housing: Metal

Weight: 2.54 kg (5.60 lb)

Dimensions: 80 x 160 x 109 mm (3.15 x 6.30 x 4.29 in)

Environmental Limits

Operating Temperature: -40 to 85°C (-40 to 185°F)

Storage Temperature: -40 to 85°C (-40 to 185°F)

Ambient Relative Humidity: 5 to 95% (non-condensing)

Power Requirements

Input Voltage:

WV models: 24/48 VDC (18 to 72 VDC)

HV models: 110/220 VAC/VDC (88 to 300 VDC, 85 to 264 VAC)

Input Current:

520 mA @ 24 VDC

80 mA @ 110 VDC

Standards and Certifications

Safety: UL 61010-2-201

Hazardous Location: UL/cUL Class I Division 2 Groups A/B/C/D

EMC: EN 61000-6-2/61000-6-4

EMI: CISPR 22, FCC Part 15B Class A

EMS:

IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV

IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m

IEC 61000-4-4 EFT: Power: 4 kV; Signal: 4 kV

IEC 61000-4-5 Surge: Power 6 kV; Signal: 4 kV

IEC 61000-4-6 CS: 150 kHz to 80 MHz: 10 V/m; Signal: 10 V/m

IEC 61000-4-8 PFMF

IEC 61000-4-11 DIPs

Electrical Substation: IEC 61850-3, IEEE 1613

Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

Device Server Specifications

Serial Interface

Number of Ports: 4

Serial Standards: RS-232/422/485

Connector: DB9 male

Serial Line Protection: 2 kV isolation protection

RS-485 Data Direction Control: ADDC® (Automatic Data Direction Control)

Console Port: Dedicated RS-232 console port (10-pin RJ45)

Serial Communication Parameters

Data Bits: 5, 6, 7, 8

Stop Bits: 1, 1.5, 2

Parity: None, Even, Odd, Space, Mark

Flow Control: RTS/CTS and XON/XOFF

Baudrate: 50 bps to 921.6 Kbps

Serial Signals

RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

RS-422: Tx+, Tx-, Rx+, Rx-, GND

RS-485-4w: Tx+, Tx-, Rx+, Rx-, GND

RS-485-2w: Data+, Data-, GND

Digital Input: 2 inputs with the same ground, but electrically isolated from the electronics

- +13 to +30 V for state "1"
- -30 to +3 V for state "0"
- Max. input current: 8 mA

Software

Configuration Options: Command Line Interface (CLI) through Serial/Telnet/SSH, Web Console (HTTP/HTTPS), Windows Utility

Windows Real COM Drivers: Windows 95/98/ME/NT/2000, Windows XP/2003/Vista/2008/7/8/8.1/10 (x86/x64), Windows 2008 R2/2012/2012 R2 (x64), Windows Embedded CE 5.0/6.0, Windows XP Embedded

Fixed TTY Drivers: SCO Unix, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X

Linux Real TTY Drivers: Linux 2.4.x, 2.6.x, 3.x, 4.x

Android API: Android 3.1.x and later

Operation Modes: Real COM, TCP Server, TCP Client, UDP, RFC2217, Modbus, DNP3, DNP3 Raw Socket

Management: SNMP MIB-II, IEC 61850 MMS

Reliability

Alert Tools: Built-in buzzer and RTC (real-time clock)

Automatic Reboot Trigger: Built-in WDT (watchdog timer)

MTBF (mean time between failures)

Time: 347,436 hrs

Standard: Telcordia (Bellcore) Standard TR/SR

Ethernet Switch Specifications

Ethernet Interface

Standards:

- IEEE 802.3 for 10BaseT
- IEEE 802.3u for 100BaseT(X) and 100BaseFX
- IEEE 802.3x for Flow Control
- IEEE 802.1D for Spanning Tree Protocol
- IEEE 802.1w for Rapid STP
- IEEE 802.1Q for VLAN Tagging
- IEEE 802.1p for Class of Service
- IEEE 802.1x for Authentication
- IEEE 802.3ad for Port Trunk with LACP

Network Protocols: ICMP, IPv4, TCP, UDP, ARP, Telnet, DNS, HTTP, SMTP, SNTP, IGMPv1/v2, GVRP, SNMPv1/v2c/v3, DHCP Server/Client, DHCP Option 82, BootP, TFTP, SNTP, SMTP, RARP, GMRP, LACP, RMON

MIB: MIB-II, Ethernet-Like MIB, P-BRIDGE MIB, Q-BRIDGE MIB, Bridge MIB, RSTP MIB, RMON MIB Group 1, 2, 3, 9

Flow Control: IEEE 802.3x flow control, back pressure flow control interface

Switch Properties

- Priority Queues: 4
- Max. Number of Available VLANs: 64
- VLAN ID Range: VID 1 to 4094
- IGMP Groups: 256

Cybersecurity:

- Security features based on IEC 62443/NERC CIP
- Supports port access control list: MAC, 802.1x authentication
- Supports RADIUS, TACACS+
- Supports Syslog for system/event

Optical Fiber Interface

		100BaseFX		
		OM1	Multi-Mode	Single-Mode
Fiber Cable Type	50/125 μ m		800 MHz*km	G.652
Typical Distance		4 km	5 km	40 km
Wave-length	Typical (nm)	1300		1310
	TX Range (nm)	1260 to 1360		1280 to 1340
	RX Range (nm)	1100 to 1600		1100 to 1600
Optical Power	TX Range (dBm)	-10 to -20		0 to -5
	RX Range (dBm)	-3 to -32		-3 to -34
	Link Budget (dB)	12		29
	Dispersion Penalty (dB)	3		1

Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power.

Note: Compute the "typical distance" of a specific fiber transceiver as follows: Link budget (dB) > dispersion penalty (dB) + total link loss (dB).

Switch Interface


RJ45 Ports: 10/100BaseT(X) auto negotiation speed, F/H duplex mode, and auto MDI/MDI-X connection

Alarm Contact: 2 relay outputs with current carrying capacity of 1A @ 24 VDC

Pin Assignment


Serial Port (DB9 male connector)

DB9 male connector



PIN	RS-232	RS-422/485-4w	RS-485-2w
1	D/C/D	TxD-(A)	-
2	RxD	TxD+(B)	-
3	TxD	RxD+(B)	Data+(B)
4	DTR	RxD-(A)	Data-(A)
5	GND	GND	GND
6	DSR	-	-
7	RTS	-	-
8	CTS	-	-

Dimensions

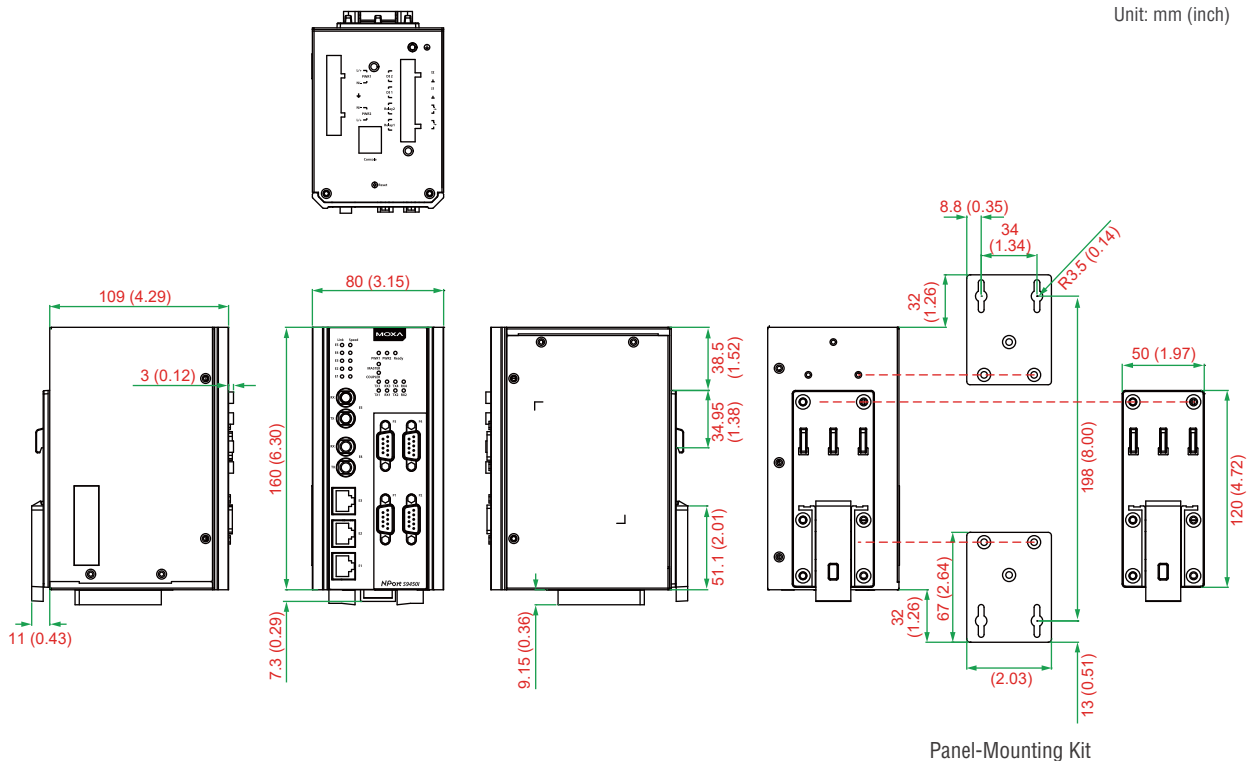

Panel-Mounting Kit

: Ordering Information

Available Models

NPort S9450I-WV-T: 4-port RS-232/422/485 rugged device server, 5 10/100M Ethernet ports, 24/48 VDC, -40 to 85°C operating temperature

NPort S9450I-HV-T: 4-port RS-232/422/485 rugged device server, 5 10/100M Ethernet ports, 88-300 VDC or 85-264 VAC, -40 to 85°C operating temperature

NPort S9450I-2M-SC-WV-T: 4-port RS-232/422/485 rugged device server, 3 10/100M Ethernet ports, 2 100M multi-mode fiber ports with SC connectors, 24/48 VDC, -40 to 85°C operating temperature

NPort S9450I-2M-SC-HV-T: 4-port RS-232/422/485 rugged device server, 3 10/100M Ethernet ports, 2 100M multi-mode fiber ports with SC connectors, 88-300 VDC or 85-264 VAC, -40 to 85°C operating temperature

NPort S9450I-2M-ST-WV-T: 4-port RS-232/422/485 rugged device server, 3 10/100M Ethernet ports, 2 100M multi-mode fiber ports with ST connectors, 24/48 VDC, -40 to 85°C operating temperature

NPort S9450I-2M-ST-HV-T: 4-port RS-232/422/485 rugged device server, 3 10/100M Ethernet ports, 2 100M multi-mode fiber ports with ST connectors, 88-300 VDC or 85-264 VAC, -40 to 85°C operating temperature

NPort S9450I-2S-SC-WV-T: 4-port RS-232/422/485 rugged device server, 3 10/100M Ethernet ports, 2 100M single-mode fiber ports with SC connectors, 24/48 VDC, -40 to 85°C operating temperature

NPort S9450I-2S-SC-HV-T: 4-port RS-232/422/485 rugged device server, 3 10/100M Ethernet ports, 2 100M single-mode fiber ports with SC connectors, 88-300 VDC or 85-264 VAC, -40 to 85°C operating temperature

NPort S9450I-2S-ST-WV-T: 4-port RS-232/422/485 rugged device server, 3 10/100M Ethernet ports, 2 100M single-mode fiber ports with ST connectors, 24/48 VDC, -40 to 85°C operating temperature

NPort S9450I-2S-ST-HV-T: 4-port RS-232/422/485 rugged device server, 3 10/100M Ethernet ports, 2 100M single-mode fiber ports with ST connectors, 88-300 VDC or 85-264 VAC, -40 to 85°C operating temperature

Package Checklist

- 1 NPort S9450I device server
- 1 CN20070 connection CBL, RJ45/10P/F9, 150 cm
- 1 DK/DC 50 x 131 mm DIN-rail kit
- Documentation and software CD
- Quick installation guide (printed)
- Warranty card