

QTM-1500/1700/1900

15"/17"/19" Multi-touch
Bezel-Free Flat Panel Monitor



- 15"/17"/19" 10-point PCT multi-touch LCD Display
- 1x HDMI, 1x DVI-D, 1x VGA
- 1x USB2.0 for touch functionality
- IP65 approved front bezel
- Glass hardness of 6H
- Bezel-free flat panel design

Product Overview

The QTM-1500/1700/1900 is a 15" / 17" / 19" multi-touch bezel-free flat panel monitor. It features 10-point PCT multi-touch panel and enables fast / intuitive operation.

Besides, it comes with a variety of display ports, including 1x HDMI, 1x DVI-D and 1x VGA, for various viewing

options, and 1x USB 2.0 for touch functionality.


Equipped with an IP65-rated front bezel and anti-scratch glass surface, the QTM-1500/1700/1900 provides excellent resistance to harsh environments and thus is highly suited to a wide range of industrial applications.

Technical Information

LCD Display	QTM-1500	QTM-1700	QTM-1900
Display Size	15 inch	17 inch	19 inch
Aspect Ratio	4:3	5:4	5:4
Backlight	LED	LED	LED
Resolution	1024x768 XGA	1280x1024 SXGA	1280x1024 SXGA
Brightness (cd/m ² , typ.)	350	350	250
Contrast Ratio (typ.)	600:1	1000:1	1000:1
Color	16.2M	16.2M	16.7M
View Angle (L/R/H/L)	45°/45°/20°/45°	85°/85°/80°/80°	85°/85°/80°/80°
Touch	10-point PCT	10-point PCT	10-point PCT
External Display			
1x HDMI (on rear)			
1x DVI-D (on rear)			
1x VGA (on rear)			
Audio			
2x Speaker-out (3W)			
1x Line-out (on rear)			
1x Line-in (on rear)			
USB			
1x USB2.0 (Type A on rear for Touch)			
Power			
Connector: DC Jack (on rear)			
Input Voltage: DC 12V (Optional: DC 24V)			
Power Adapter: AC to DC, 100V ~ 240V			

System Control & Monitoring
1x Power LED (on left side)
1x Power Button (on left side)
1x Menu / Enter Button (on left side)
1x Up Button (on left side)
1x Down Button (on left side)
1x Exit Button (on left side)
Cooling
Passive
Construction
Glass Surface + Ultra-narrow Aluminum Front Bezel + Metal Chassis
Dimension (W x H x D)
QTM-1500: 381.7 x 305.6 x 68.2 mm / 15.03" x 12.03" x 2.69"
QTM-1700: 413.0 x 334.0 x 73.3 mm / 16.26" x 13.15" x 2.89"
QTM-1900: 447.3 x 372.0 x 70.4 mm / 17.61" x 14.65" x 2.77"
Weight
QTM-1500: 4.6 kg / 10.14 lb
QTM-1700: 5.8 kg / 12.79 lb
QTM-1900: 6.4 kg / 14.11 lb
Environmental Characteristics
Operation Temperature: 0°C ~ 50°C / 32°F ~ 122°F
Storage Temperature: -20°C ~ 70°C / -4°F ~ 158°F
Humidity: 0% ~ 95%
Mounting
VESA Mount, Panel Mount
Certification
CE, FCC Class A, IP65 (front)

QTM-1500/1700/1900 I/Os

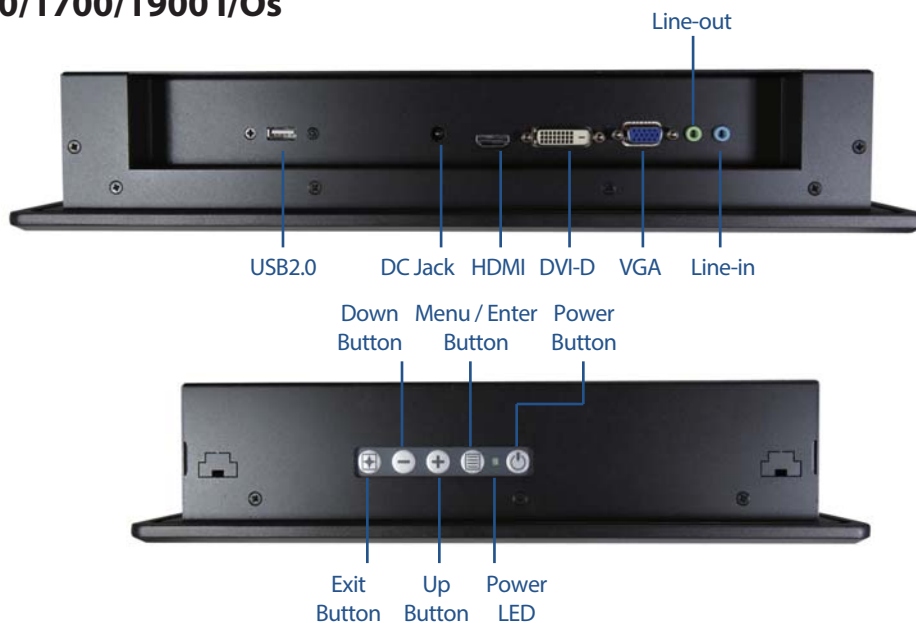



Ordering Information

Article	Part No.	Description
QTM-1500	SQTM150000010T00	15" 4:3 10pt PCT, 1x HDMI, 1x DVI-D, 1x VGA, 1x USB2.0, 1x Line-out, 1x Line-in
QTM-1700	SQTM170000010T00	17" 5:4 10pt PCT, 1x HDMI, 1x DVI-D, 1x VGA, 1x USB2.0, 1x Line-out, 1x Line-in
QTM-1900	SQTM190000010T00	19" 5:4 10pt PCT, 1x HDMI, 1x DVI-D, 1x VGA, 1x USB2.0, 1x Line-out, 1x Line-in