

MIEN2208



8 10/100M ports din-rail mounting layer 2 unmanaged industrial Ethernet switch



Features

- ▶ Support 8 100M FX or 10/100M RJ45 optional ports;
- ▶ Start working once connected, quick and convenient;
- ▶ Support indicator lights for states display;
- ▶ Support industrial grade power supply;
- ▶ Support power-down status relay alarm output;
- ▶ Wide temperature range design ,fanless thermal design;
- ▶ Satisfy harsh industrial environment.

Specs

Network standards

IEEE802.3i-10BaseT、IEEE802.3u-100BaseTX/100BaseFX
IEEE802.3x-Flow Control

Port

10/100M port: support 8 100MFX or 10/100M RJ45 optional ports
Alarm port: terminal block, 1A@24VDC, support power-down status

Switch Properties

Switch Delay: < 5 μ s Switch Bandwidth:1.6Gbps
MAC Table Size:2K

Transmission distance

Ethernet twisted pair:100m (Standard CAT5/CAT5e cable)
Multimode fiber: 10/100M multimode 850nm 2km;1310nm 5km
Single mode fiber: 10/100M single mode 1310nm 20/40km;
1550nm 60/80km

Physical Characteristics

Shell:IP40 protection,aluminium alloy shell
Installation:standard 3.5-inch din-rail Mounting
Dimensions:144mmx110mmx54mm

Power


Power Input: DC12V、DC24V、DC48V available
DC110~220V (DC110~370V Wide pressure range)
AC100~240V (AC85~264V Wide pressure range)
Power Consumption: < 6w (MAX)

Environment

Operating Temperature:-40 $^{\circ}$ C~85 $^{\circ}$ C
Relative Humidity:5%~95%
EMC level 4 standard

Product Dimensions

Din-rail mounting Installation (unit:mm)

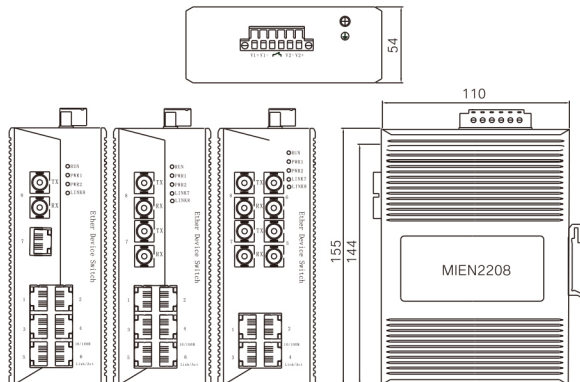

Ordering Information

MIEN2208-AD220	8 10/100M RJ45 ports,single power in standard
MIEN2208-F(M/S)-AD220	1 100M FX ports,7 10/100M RJ45 ports,single power in standard
MIEN2208-2F(M/S)-AD220	2 100M FX ports,6 10/100M RJ45 ports,single power in standard
MIEN2208-4F(M/S)-AD220	4 100M FX ports,4 10/100M RJ45 ports,single power in standard
MIEN2208-DC24	8 10/100M RJ45 ports,dual power in standard
MIEN2208-F(M/S)-DC24	1 100M FX ports,7 10/100M RJ45 ports,dual power in standard
MIEN2208-2F(M/S)-DC24	2 100M FX ports,6 10/100M RJ45 ports,dual power in standard
MIEN2208-4F(M/S)-DC24	4 100M FX ports+4 10/100M RJ45 ports,dual power in standard