



MIEN2205P-MC-4TPOE

5x10/100M ports layer 2 din-rail mounting industrial Ethernet POE switch



Specs

Network Standards

IEEE802.3, IEEE802.3u, IEEE802.3X

Interface

Downlink port: 4x10/100base-TX Ethernet (PoE port)

Uplink ports: 1x10/100M SFP and 1x10/100Base-TX Ethernet port

Switch Properties

Switch Capacity:1.2Gbps Packet forwarding rate:0.89Mpps

Switch mode: store and forward Caching:512K

MAC Table Size:2K

POE Properties

POE Standard:802.3af/at (PSE)

POE Power supply mode: End-Span

POE line sequence:1/2(+), 3/6(-)

POE power: single port PoE output ≤30W (54V DC),
overall unit PoE output ≤60W

Physical Characteristics

Shell:IP60 protection,aluminium alloy shell

Installation:Din-rail mounting installation

Dimension:159mm×46.5mm×110mm

Power

Power Input:DC48~57V

Power consumption: < 5W (Excluding POE)

Features

- ▶ Provides 4x10/100BASE-TX Ethernet ports (PoE ports) and 1x10/100BASE-TX Ethernet port and 1x10/100M SFP optical ports;
- ▶ Support IEEE802.3af/at standard, single port output up to 30W power;
- ▶ A key CCTV, under this mode 1-4 joint ports only communication on the uplink port,Downlink rate is 10Mbps, transmission distance is 250m;
- ▶ Each PoE network port has a restart function to facilitate system maintenance;
- ▶ 6KV lightning protection, 8KV electrostatic protection and anti-interference ability;
- ▶ Redundant power supply design, standard DC block and green terminal interface, adaptable power adaptors for a variety of different interfaces and power;
- ▶ Fanless and pleated metal shell heat dissipation design;
- ▶ Support for a variety of installation methods, including din-rail mounting, wall-mounted and desktop installation.

Environment


Operating Temperature: -40°C~75°C

Relative Humidity: 5%~95%

EMC level 4 standard

Product Dimensions

Din-rail mounting(unit:mm)

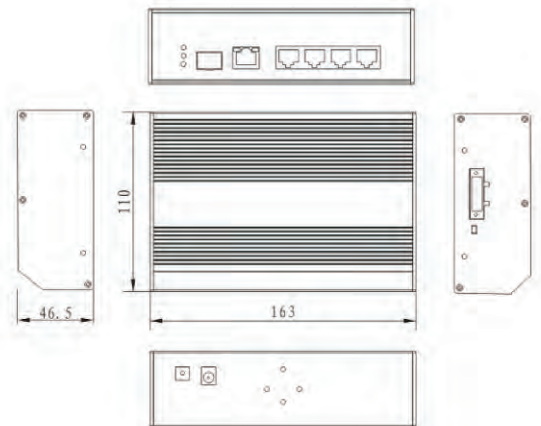

Ordering Information

MIEN2205P-MC-4TPOE

100M FX+1x10/100M RJ45+4x10/100M POE RJ45 ports layer 2 din-rail mounting industrial Ethernet POE switch