100Mbps Ethernet over Coaxial Cable PoE EOC Converter

(EOC1C4E)

100Mbps 4C1E EOC Converter











- ◆ Analog monitoring surveillance and HD network upgrading without replacing the coaxial cable
- ◆Long distance network extended and can be up to 1200 meters
- ◆ Support multi-point access, one point to multi-point access
- ◆4 RJ45 ports support Power-over-Ethernet (PoE), meet PoE standard IEEE802.3af and IEEE802.3at, total PoE power is 60W
- ◆Long distance centralized power supply, the effect is equivalent to PoE power supply
- ◆Transmission via coaxial cable, twisted pair, telephone line and other transmission media
- ◆There must be two or more transmissions, the same link(within the same physical coaxial or twisted pair) just set up the master device to support multiple devices work simultaneously

Product Description

Through coaxial cable transmission, can provide 100Mbps network flow with regular video cable or twisted pair; support 32-way 720P image (a million images) transmission, 24-way 960P image (1.3 million images) transmission, and 16 way 1080P image (two millions images) transmission. Built-in transmitting circuit and receiving circuit, and each converter is capable of transmitting and receiving function. Simple to use, no hardware or software debugging, no IP setting, just connecting the video cable to work normally.

Has the advantage distance of long transmission, high-speed communication. supporting multimedia services and flexing networking, etc. Widely applied for upgrading the original analog system to HD system, new building long-distance transmission systems, etc. Due to the wires selection diversity, all the original wires in the analog camera can be used as the transmission medium, no need re-wiring. Thus, just replacing the front camera, plus EOC transmitter device, you can upgrade the analog systems to HD digital network, save wirina time. manpower material and resources.

Technical Specification


| Product Model | EOC1C4E | | |
|----------------------------|--|--|--|
| Transmission Media | Coaxial Cable, Twisted Pair | | |
| Connector | 4X RJ45 connectors,1X BNC connector | | |
| Transmission Range/Rate | Cable length less than 400M - 190Mbps; Cable length less than 1000M - 70Mbps; Cable length less than 2000M - 30Mbps; | | |
| Coaxial Input/Output | BNC port/ 75ohm | | |
| LED Light Status | Network cable connected LED light is on Video cable connected LED light is flashing | | |
| Master Slave Setting | Master mode solidified | | |
| Power Supply | 48V DC,1.25A | | |
| PoE Port | 4 PoE ports | | |
| PoE Standard | IEEE802.3af and IEEE802.3at | | |
| Total PoE Power | 60W | | |
| Working Temperature | -20℃ ~40℃ | | |
| Relative Humidity | 5%~95%, no condensation | | |
| Product Dimension | 88.19x117x26mm | | |

Cable Length and Speed Reference Table

| Cable Length(m) | Bandwidth(Mbps) | PHY TX & RX Rate(M) |
|-----------------|-----------------|---------------------|
| 1 | 91 | 200 |
| 200 | 93 | 190 |
| 400 | 93 | 190 |
| 600 | 86 | 160 |
| 800 | 77 | 120 |
| 1000 | 50 | 70 |
| 1200 | 10 | 30 |

Product Dimension Display


WxHxD (mm): 88.19x117x26mm

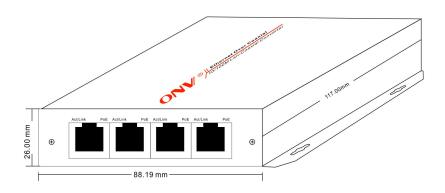





Product Application Display

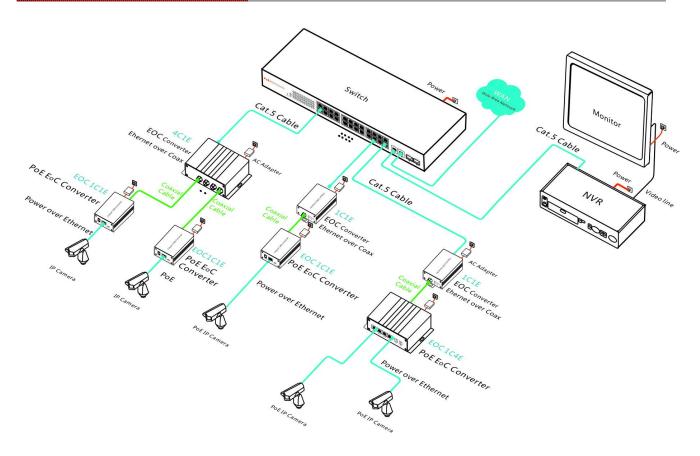

: Product Ordering Information

Product Model: EOC1C4E

Product Description: 100Mbps 4C1E Coaxial Cable EOC Converter, 4x 10/100M auto-sensing RJ45 ports, 1X Coaxial Input/Output BNC port. 4 RJ45 ports support Power-over-Ethernet (PoE),

meet PoE standard IEEE802.3af and IEEE802.3at, total PoE power is 60W.

Power input: 48V, 1.25A.

: Product Packing Lists

| | 100Mbps EOC Converter (EOC1C4E) |
|---------|---------------------------------|
| Packing | Power Adapter |
| Lists | User Manual |
| | Warranty Card |