



U-7526M

OPC UA I/O Module with 2-ch DI, 2-ch DO, 6-ch AI, 2-ch AO, and 2-port Ethernet Switch

Features

- Built-in Web Server to Provide the Web User Interface
- Support OPC UA Server and MQTT Client Protocol
- Support to Execute OPC UA and MQTT Communication Simultaneously
- Support Scaling
- Built-in I/O Channels (2 x DI, 2 x DO, 6 x AI, 2 x AO)
- 2-port Ethernet Switch for Daisy-Chain Topology
- IEEE 802.3af-compliant Power over Ethernet (PoE)



Introduction

U-7526M is a UA I/O module that provides 2 digital input channels, 2 digital output channels, 6 analog input channels and 2 analog output. It has a built-in two-port Ethernet switch to implement daisy-chain topology. The cabling is much easy and can reduce the total cable and switch cost. It follows IEEE 802.3af compliant Power over Ethernet (PoE) specification. It allows receiving power from PoE enabled network by Ethernet pairs. This feature provides greater flexibility and efficiency to simplify system design, save space, and reduce wirings and power sockets. It provides a Web UI to configure/control/monitor the modules, connections, and I/O status via a web browser. It is easy, fast, and no extra APP needed.

In industrial communication, UA I/O provides OPC UA Server and MQTT Client protocols (can execute both communications at the same time.). Users can choose the networking mode according to their cases. And to transmit the values of the built-in I/O channels to the Cloud IT system or field control system for reading and writing. Support Scaling to convert the analog signal into a more readable value.

System Specifications

CPU Module	
CPU	32-bit CPU (400 MHz)
Isolation	
Intra-module Isolation	2500 VDC
EMS Protection	
EFT (IEC 61000-4-4)	±2 kV for Power Line
ESD (IEC 61000-4-2)	±4 kV Contact for each terminal and ±8 kV Air for random point
Surge (IEC 61000-4-5)	±2 kV for Power Line
LED Indicators	
Status	1 x PoE Power 1 x System Running 1 x Ethernet Link/Act 12 x I/O Channel Status
Ethernet	
Ports	RJ-45 x 2, 10/100 Base-TX, Switch Ports (LED indicators)
PoE	Yes
Power	
Reverse Polarity Protection	Yes
Input Range	12 ~ 48 VDC
Consumption	4.4 W
Powered from PoE	Yes, IEEE 802.3af, Class 1
Powered from Terminal Block	Yes, 12 ~ 48 VDC
Mechanical	
Dimensions (mm)	97 x 120 x 42 (W x L x H)
Installation	Wall Mounting
Environmental	
Operating Temperature	-25 °C ~ +75 °C
Storage Temperature	-30 °C ~ +80 °C
Humidity	10 ~ 90% RH, Non-condensing

Software Specifications

Protocol	
OPC UA Server	<ul style="list-style-type: none"> ● OPC Unified Architecture: 1.02 ● Core Server Facet ● Data Access Server Facet ● Method Server Facet ● UA-TCP UA-SC UA Binary ● User Authentication: <ul style="list-style-type: none"> - Anonymous - Username/Password - X.509 Certificate ● Security Policy: <ul style="list-style-type: none"> - None - Basic128Rsa15 (Sign, Sign & Encrypt) - Basic256 (Sign, Sign & Encrypt) ● Max. Session Connections: 3 ● Can Execute with MQTT Communication Simultaneously
MQTT Client	<ul style="list-style-type: none"> ● Connect to the MQTT Broker to read or control the I/O channel value by the publish/subscribe messaging mechanism. (MQTT Ver. 3.1.1; TLS Ver. 1.2) ● Can Execute with OPC UA Communication Simultaneously
Function	
Web Interface for Configuration	<ul style="list-style-type: none"> ● The system operation can be performed through the browser without installing software tools. ● Use AES 256 encryption algorithm to encrypt web page setting data for general communication.
Scaling	<ul style="list-style-type: none"> ● Convert the analog signal to a more readable value. ● Function is only available for modules with AI/O.
Security	<ul style="list-style-type: none"> ● Based on security considerations, only the service ports needed by the I/O modules are open up, and the rest are not open. ● Forbidden to use ping: turn off this function so that others cannot scan the device, so as to reduce the possibility of network attacks.

I/O Specifications


Analog Input	
Channels	6 (Differential)
Type	± 500 mV, ± 1 V, ± 5 V, ± 10 V, ± 20 mA, $0 \sim 20$ mA, $4 \sim 20$ mA (Jumper Selectable)
Resolution	16-bit
Accuracy	$\pm 0.1\%$
Sampling Rate	Voltage: 2 M Ω Current: 125 Ω
Input Impedance	Close to GND
Common Mode Rejection	86 dB Min.
Normal Mode Rejection	100 dB
Common Voltage Protection	± 200 VDC
Overvoltage Protection	240 Vrms
Overcurrent Protection	Yes, 50 mA Max. at 110 VDC/ VAC Max
Individual Channel Configuration	Yes
Channel-to-Channel Isolation	Yes, ± 400 VDC
Open Wire Detection	Yes, for $4 \sim 20$ mA only
Zero Drift	± 20 μ V/ $^{\circ}$ C
Span Drift	± 25 ppm/ $^{\circ}$ C
Analog Output	
Channels	2
Type	$0 \sim 5$ VDC, ± 5 VDC, $0 \sim 10$ VDC, ± 10 VDC $0 \sim 20$ mA, $4 \sim 20$ mA (Jumper Selectable)
Resolution	12-bit
Accuracy	$\pm 0.1\%$ of FSR
Open Wire Detection	Yes, for $4 \sim 20$ mA only
Voltage Output Capability	20 mA @ 10 V
Current Load Resistance	500 Ω

Digital Input/Counter	
Channels	2
Type	Dry + Wet Contact
Sink/Source (NPN/PNP)	Dry: Source Wet: Sink/Source
Wet Contact, ON Voltage Level	+1 VDC Max.
Wet Contact, OFF Voltage Level	+3.5 VDC \sim + 30 VDC
Dry Contact, ON Voltage Level	Close to GND
Dry Contact, OFF Voltage Level	Open
Dry Contact, Effective Distance	500 M Max.
Max. Count	16-bit (65535)
Frequency	50 Hz
Min. Pulse Width	10 ms
Overvoltage Protection	+70 VDC
Digital Output	
Channels	2
Type	Isolated Open Collector
Sink/Source (NPN/PNP)	Sink
Load Voltage	+5 VDC \sim +50 VDC
Max. Load Current	700 mA/Channel
Overvoltage Protection	60 VDC
Overload Protection	1.4 A
Short-circuit Protection	Yes

Wire Connections


Voltage Input (Default) 		
Current Input 		
Voltage Output (Default) 		
Current Output 		
Digital Input/Counter	ON State Readback as 1	OFF State Readback as 0
Dry Contact		
Digital Output	ON State Readback as 1	OFF State Readback as 0
Open Collector (Sink)		

Pin Assignments

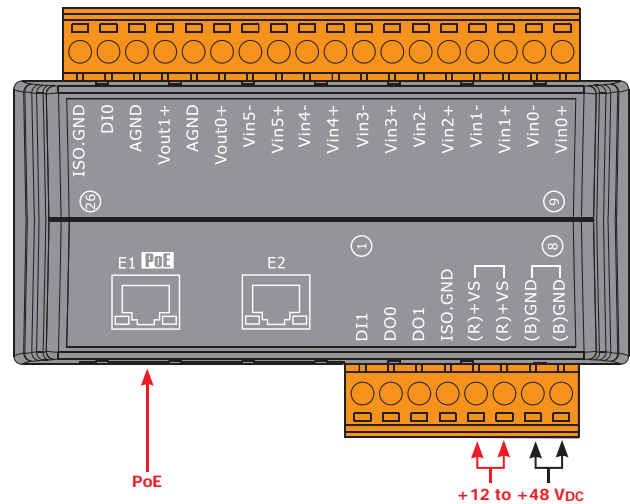


Jumper Location


U-7526M								
Channel	Vout1	Vout0	Vin5	Vin4	Vin3	Vin2	Vin1	Vin0
Jumper	J8	J7	J6	J5	J4	J3	J2	J1
Location	Jumper							

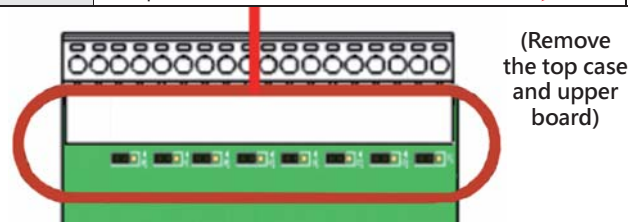

Appearance

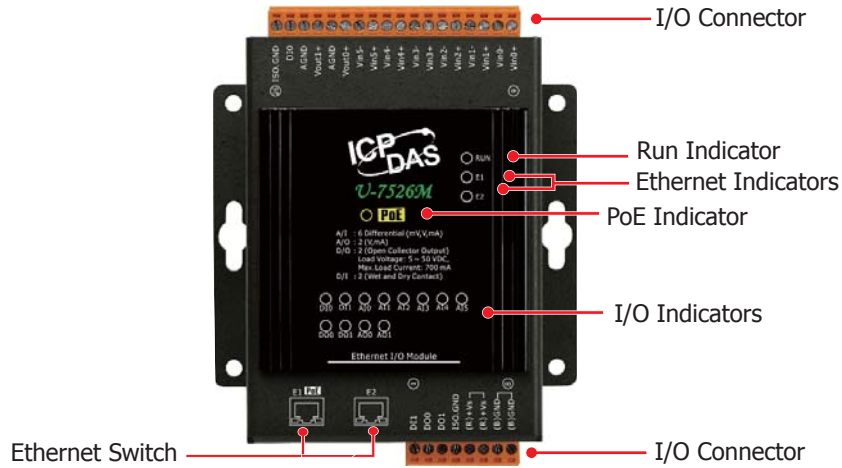

Dimensions (mm)

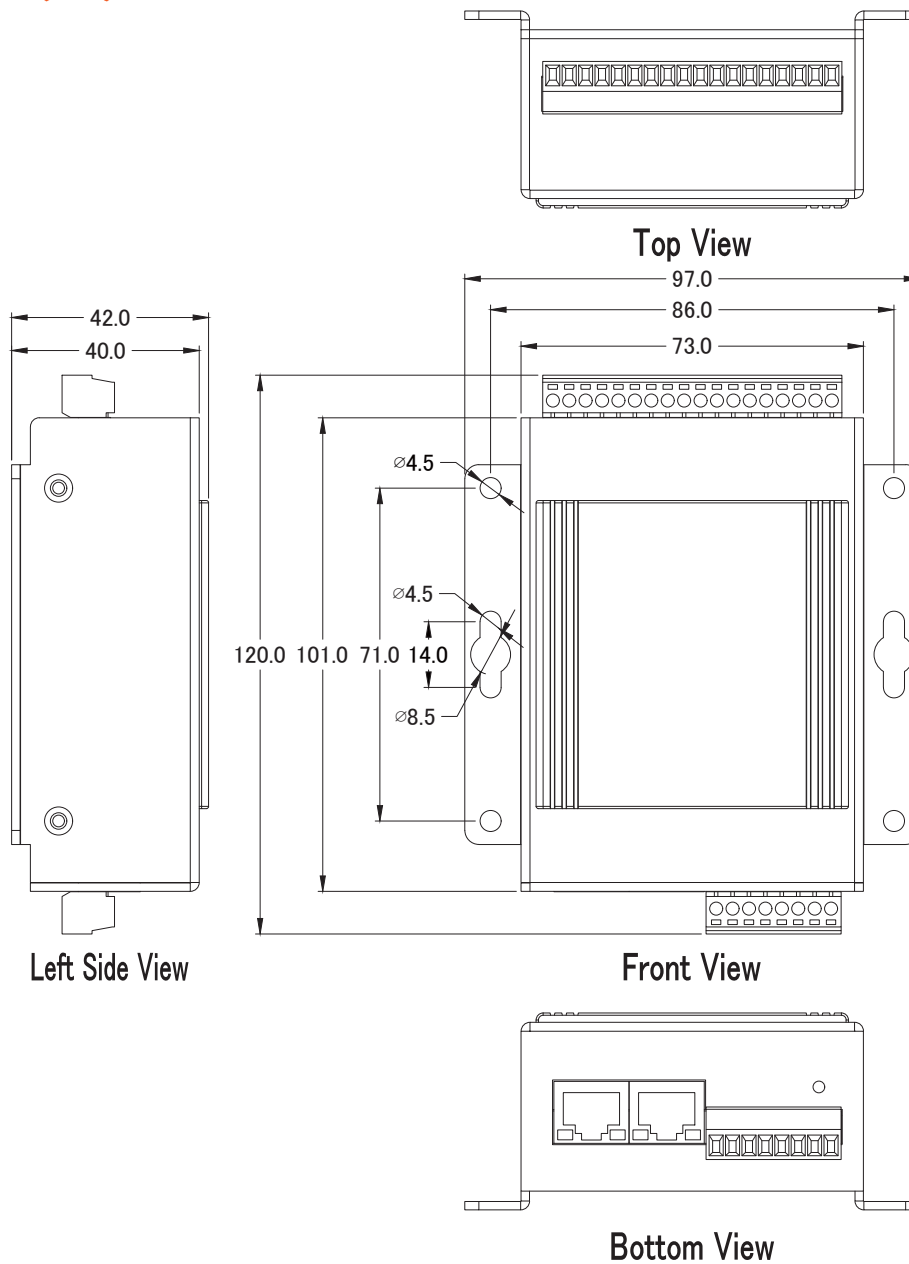

Ordering Information

U-7526M CR	OPC UA I/O Module with 2-ch DI, 2-ch DO, 6-ch AI, 2-ch AO, and 2-port Ethernet Switch. (RoHS)
-------------------	-----------------------------------------------------------------------------------------------