

TPC-DCS190A1

19.0" SXGA Intel J3455 Pcap. Panel PC

Version: 3.0



Features


- 19.0" TFT LCD display, 4:3, LED Backlit, SXGA 1280 *1024;
- Intel Apollo Lake J3455 processor, Quad-core 1.5Ghz;
- Multi-points (Max. up to 10 points) Projective capacitive touch, EETI controller;
- Aluminum-magnesium alloy, anodized treatment, Modular designed;
- DC 12V, optional wide voltage DC 9~36V power input;
- IO: 2*GLAN, 4*USB3.0, 3*COM (DB9), 2*HDMI;
- Intel PTT TPM2.0, Support Windows 11 OS;
- Fan-less & Slim design, Panel mount, VESA, Front IP65 protection.

Specification

Hardware & System	BIOS	SPI AMI EET BIOS
	CPU	Intel Apollo Lake J3455, Quad-core 1.5Ghz, burst to 2.3Ghz
	Memory	SO-DIMM, Support DDR3L 1333/1600/1866 MHz, Max. up to 8GB
	Storage	1* M.2 (SATA) slot + 1* 2.5" SATA
	Graphic	Intel HD Graphics 500
	Network	2* Intel I211 GBE LAN chip (Optional wireless 3G/4G, 5G, Wi-Fi/BT, Wi-Fi 6)
	Audio	On-board Realtek ACL 662 audio controller
	Expansion	1* M.2 Key-B slot, 1* M.2 Key-E slot
	Watch dog	0~256 seconds programmable
	OS	Win10, Win11, Linux, Ubuntu
IO interface	COM	3*RS232 (Default), Optional 1* RS485 or 8*GPIO
	Ethernet	2* RJ45, 10/100/1000 Mbps
	Audio	Optional Line-out
	USB	4x USB3.0
	Display	2x HDMI
	Power	1x 2 pins, phenix terminal
LCD Display	Size/Type	19.0" TFT LCD
	Resolution	1280 * 1024 (SXGA)
	Brightness	250 nits
	Backlit & MTBF	LED backlit & 30 000hours
	Display area	376.32 * 310.06
	View angle	89/89/89/89
Touchscreen	Type	Projective capacitive touchscreen
	Touch points	Multi points touch, max. up to 10 points
	Durability	>100 000 000 times
	Surface hardness	Mohs 6H
	Special treatment	Anti-fingerprint (AF)
Structure	Structure and surface	Magnesium-Aluminum alloy, sand blasting, anodized treatment
	Mount method	Panel mount, VESA 75/100
	Cooling system	Large area finned heat sink
	Overall dimension	422.3 * 353 * 57.5 (mm)
	Cut-out dimension	411 * 342 (mm)
	Net weight	6.2 KG
	IP protection	Front Panel IP65
Power & Environmental	Operating temp.	0 ~ +50°C
	Storage temp.	-20 ~ +60°C
	Relative Humidity	10 ~ 95% @ 10C (Non-condensation)
	Vibration	50 ~ 500 Hz, 1.5G, 0.15mm peak to peak
	Shock	10G/Peak (11 ms)
	Power input	DC 12V (Optional DC 9~36V)
	Power consumption	Around 35W
	EMC	CE/FCC Class A

DIMENSIONAL DRAWING:TPC-DCS190

Dimension

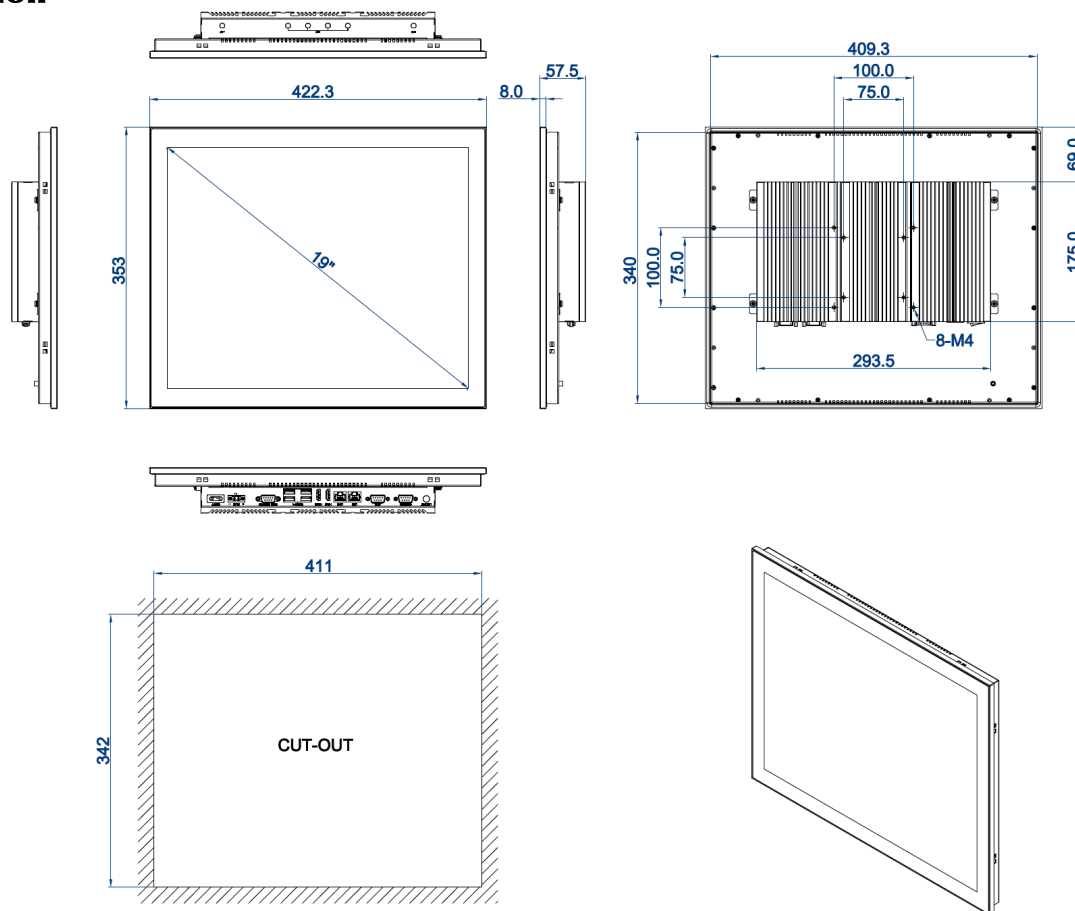

DIMENSIONS IN MILLIMETERS

TAICENN
DATE:2022.01.27
REV:A Unit:mm

Ordering info.

Part no.	Description
TPC-DCS190A1	19.0", 1280 * 1024, Intel J3455, Quad-core 1.5Ghz, Pcap. touch, 2*GLAN, 4*USB3.0, 3*COM, 2*HDMI, DC 12V, PSU
TPC-DCS190A1W	19.0", 1280 * 1024, Intel J3455, Quad-core 1.5Ghz, Pcap. touch, 2*GLAN, 4*USB3.0, 3*COM, 2*HDMI, DC 9~36V, No PSU by default
Memory	SO-DIMM, DDR3L, <u>4GB/8GB</u> Memory
Storage	M.2 SSD: <u>128GB/256GB/512GB</u> 2.5" SATA SSD: <u>64GB/128GB/256GB/512GB/1TB</u> 2.5" HDD: <u>2TB/4TB</u>
Wireless Modules	Wi-Fi module, with Antenna (M.2 interface) Wi-Fi with BT integrated module, with Antenna (M.2 interface) All network 4G/LTE module, With Antenna (M.2 interface) 5G module, with Antenna (M.2 interface)
Power supply	Optional PSU for TPC-DCS190A1W
SIM Card module	Sim card slot for 3G/4G/5G Wireless function

Packing List

- 1x Standard Product
- 1x 60W PSU (Power Supply)
- 1x Power cable & Plug
- 8x Panel mount metal clips