

TRIPLE LOOP ISOLATOR

Type: AITA

FEATURES

- 3 Loop isolators 4 - 20 mA in one unit
- Prevent lightning from spreading over the system
- Working voltage max.: 1000 V_{RMS}
- Transient overvoltage max.: 8000 V_{peak}
- Excellent linearity
- Small outlines, 35 mm. wide

Description:

The loop isolator is designed to separate a 4 - 20 mA loop into two galvanically separated 4-20 mA loops in order to prevent signal distortion and instrumentation damages due to electrical noise or voltage spikes and ground loop currents.


The insulation is based on a high performance linear optocoupler with an excellent linearity and a low coupling capacitance.

Application:


For use in instrumentation with current loop I/O as used by PLCs, sensors, recorders, indicators, alarm units etc.

CONNECTION DIAGRAM


Rail mounting

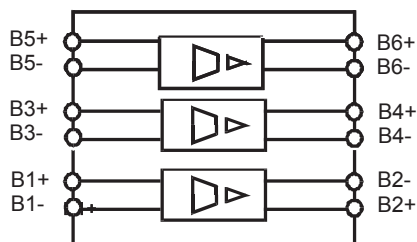

FUNCTION DIAGRAM

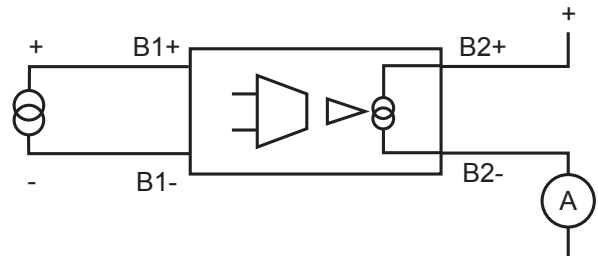

INPUT/OUTPUT CHARACTERISTICS

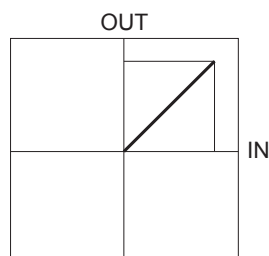

Input: 4 - 20 mA

Output: 4 - 20 mA

SPECIFICATIONS

INPUT

4 - 20 mA Max. input 100 mA
Loop supplied Voltage drop, Max. 7 V

PERFORMANCE PARAMETERS

TIMING
Response time < 10 msec.
ELECTRICAL
Precision Class 0.5 according to DIN / EN60688
Linearity < 0.02 %
Temp. dependence ± 0.02 % / °C
Supply dependence ± 0.01 % / % ΔU

OUTPUT

Loop supplied Loop voltage, 8 - 32 V
4 - 20 mA Max. voltage, 36 V

Max. load 600 Ω. @ 20 V Loop voltage

ISOLATION CHARACTERISTICS

Capacitance < 1 pF, input/output
Safty approval According to:

UL1577 (5 kVRMS/1 min. rating)

VDE 0884/06.92 ($V_{iORM} = 1$ kVRMS)

BSI: BS415; 1990
 BS7002; 1992
 BS EN60950; 1992
 EN41003; 1991

GENERAL

Temperature range - 25 °C to + 55 °C
Humidity Up to 90 % RH non-condensing
Weight 0.12 kg



EMC directive 89/336:

International Standards
EN50081 - Emission
EN50082 - Immunity

Low voltage directive 73/23:

EN60255 - Electrical Relays
EN60688 - Measuring transducers

ORDERING INFORMATION

TYPE
Triple loop isolator

HOUSING
Rail mounting

SIZE
35 mm.

CODE END

