

TN-5508-4PoE/5516-8PoE Series

Preliminary

EN50155 8/16-port IEEE 802.3af PoE managed Ethernet switches



- > M12 connectors for robust links
- > 4 or 8 IEEE 802.3af compliant PoE and Ethernet combo ports
- > Provides up to 15.4 watts at 48 VDC per PoE port
- > Isolated redundant power inputs with universal 24/48 VDC, or 110/220 VDC/VAC power supply range
- > EN50155/50121-3-2/50121-4, NEMA TS2, and e-Mark compliant
- > -40 to 75°C operating temperature range (T models)
- > Turbo Ring, Turbo Chain, and IEEE 802.1D-2004 RSTP/STP for Ethernet redundancy



2

Industry-specific Ethernet Switches > TN-5508-4PoE/5516-8PoE Series

Introduction

The ToughNet TN-5500 series M12 PoE managed Ethernet switches are designed for industrial applications, such as rolling stock, vehicle, and railway. The TN series switches use M12 and other circular connectors to ensure tight, robust connections, and guarantee reliable operation against environmental disturbances, such as vibration and shock. The TN-5500-PoE series Ethernet switches provide 8 or 16 fast Ethernet M12 ports with 4 or 8 IEEE 802.3af compliant PoE (Power-over-Ethernet) ports. The switches are classified as power source equipment (PSE) and provide up to 15.4 watts of power per port, and can be used to power IEEE 802.3af compliant powered devices

(PDs) (such as surveillance cameras, wireless access points, and IP phones) when AC power is not readily available or is cost-prohibitive to provide locally for rolling stock. In addition, the 24/48 VDC, or 110/220 VDC/VAC dual, redundant power supply increases the reliability of your communications and saves on cabling/wiring costs. Wide temperature models with an extended operating temperature range of -40 to 75°C are also available. The TN-5500-PoE series Ethernet switches are compliant with EN50155/50121-3-2/50121-4 (railway applications), NEMA TS2 (traffic control systems), and e-Mark (vehicles) requirements, making the switches suitable for a variety of industrial applications.

Features and Benefits

- Advanced PoE management function
- Three rotary switches for setting the last 3 digits of the IP address makes maintenance even easier
- IPv6 Ready logo awarded (IPv6 Logo Committee certified)
- Leading EN50155-compliant PoE switches for rolling stock applications
- DHCP Option 82 for IP address assignment with different policies
- Modbus/TCP industrial Ethernet protocol supported
- Turbo Ring, Turbo Chain, and IEEE 802.1D-2004 RSTP/STP for network redundancy
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p/1Q and TOS/DiffServ) to increase determinism
- IEEE 802.3ad, LACP for optimum bandwidth utilization
- SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- SNMPv1/v2c/v3 for different levels of network management
- RMON for efficient network monitoring and proactive capability
- Bandwidth management prevents unpredictable network status
- Lock port allows access by only authorized MAC addresses
- Port mirroring for online debugging
- Automatic warning by exception through email, relay output
- Line-swap fast recovery
- Automatic recovery of connected device's IP addresses
- LLDP for automatic topology discovery in network management software
- Configurable by web browser, Telnet/serial console, and Windows utility
- Panel mounting or DIN-Rail mounting installation capability

Specifications

Technology

Standards:

- IEEE 802.3af for Power-over-Ethernet
- IEEE 802.3 for 10BaseT
- IEEE 802.3u for 100BaseT(X)
- IEEE 802.3ab for 1000BaseT(X)
- IEEE 802.3x for Flow Control
- IEEE 802.1D for Spanning Tree Protocol
- IEEE 802.1w for Rapid STP
- IEEE 802.1Q for VLAN Tagging
- IEEE 802.1p for Class of Service
- IEEE 802.1X for Authentication
- IEEE 802.3ad for Port Trunk with LACP

Protocols: IGMPv1/v2, GMRP, GVRP, SNMPv1/v2c/v3, DHCP Server/Client, DHCP Option 66/67/82, BootP, TFTP, SNTP, SMTP, RARP, RMON, HTTP, HTTPS, Telnet, SSH, Syslog, LLDP, IEEE 1588 PTP, Modbus/TCP, IPv6

MIB: MIB-II, Ethernet-like MIB, P-BRIDGE MIB, Q-BRIDGE MIB, Bridge MIB, RSTP MIB, RMON MIB Group 1, 2, 3, 9

Flow Control: IEEE802.3x flow control, back pressure flow control

Switch Properties

Priority Queues: 4

Max. Number of Available VLANs: 64

VLAN ID Range: VID 1 to 4094

IGMP Groups: 256

Interface

Fast Ethernet: Front cabling, M12 connector, 10/100BaseT(X) auto negotiation speed, F/H duplex mode, and auto MDI/MDI-X connection

Console Port: M12 A-coding 5-pin male connector

System LED Indicators: PWR1, PWR2, FAULT, MSTR/HEAD, CPLR/ TAIL

Port LED Indicators: 10/100M (fast Ethernet port), PoE

Alarm Contact: 2 relay outputs in one M12 A-coding 5-pin male connector with current carrying capacity of 3 A @ 30 VDC

Rotary Switches: For setting the last 3 digits of the IP address

Power Requirements

Input Voltage:

- 24 VDC (16.8 to 36 V)
- 48 VDC (46 to 50 V)
- 110/220 VDC/VAC (88 to 300 VDC, 85 to 264 VAC)

Input Current:

- TN-5508-4PoE Series
 - Max. 3.5 A @ 24 VDC
 - Max. 1.8 A @ 48 VDC
 - Max. 0.92/0.47 A @ 110/220 VDC
 - Max. 0.77/0.39 A @ 110/220 VAC
- TN-5516-8PoE Series
 - Max. 7.5 A @ 24 VDC
 - Max. 3 A @ 48 VDC
 - Max. 1.95/0.975 A @ 110/220 VDC
 - Max. 1.83/0.91 A @ 110/220 VAC

Overload Current Protection: Present

Connection: M23 connector

Reverse Polarity Protection: Present

Physical Characteristics

Housing: Metal, IP54 protection (optional protective caps available for unused ports)

Dimensions:

TN-5508-4PoE series: 185 x 170 x 110 mm (7.28 x 6.69 x 4.33 in)

TN-5516-8PoE series: 250 x 170 x 110 mm (9.84 x 6.69 x 4.33 in)

Installation: Panel mounting, DIN-Rail mounting (with optional kit)

Environmental Limits

Operating Temperature:

Standard Models: 0 to 60°C (32 to 140°F)

Wide Temp. Models: -40 to 75°C (-40 to 167°F)

Storage Temperature: -40 to 85°C (-40 to 185°F)

Operating Humidity: 5 to 95% RH (non-condensing)

Regulatory Approvals

Safety: UL508 (Pending)

EMI: FCC Part 15, CISPR (EN55022) class A

EMS:

EN61000-4-2 (ESD), Level 3

EN61000-4-3 (RS), Level 4

EN61000-4-4 (EFT), Level 3

EN61000-4-5 (Surge), Level 3

EN61000-4-6 (CS), Level 3

EN61000-4-8

EN61000-4-11

EN61000-4-12

Traffic Control: NEMA TS2 (Pending)

Road Traffic: e-Mark (Pending)

Rail Traffic: (for panel mounting installations)

EN50155 (Pending), EN50121-3-2 (Pending),

EN50121-4 (Pending)

Shock: IEC61373

Freefall: IEC60068-2-32

Vibration: IEC61373

Note: Please check Moxa's website for the most up-to-date certification status.


Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty


Dimensions

TN-5508-4PoE Series

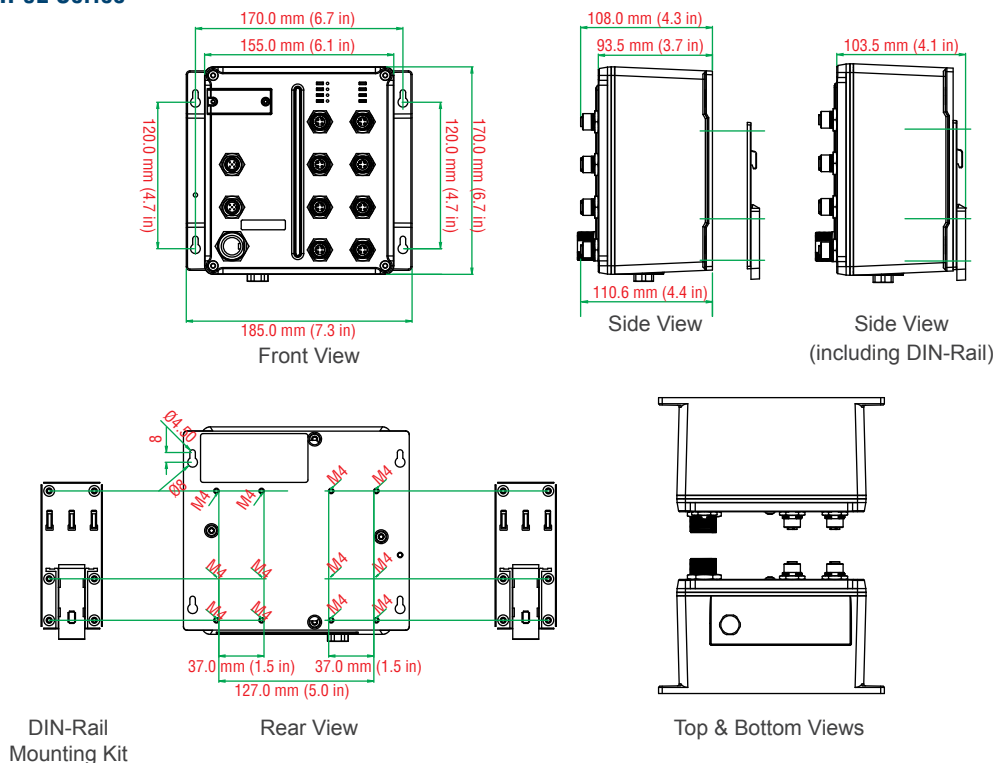

Dimensions

TN-5516-8PoE Series

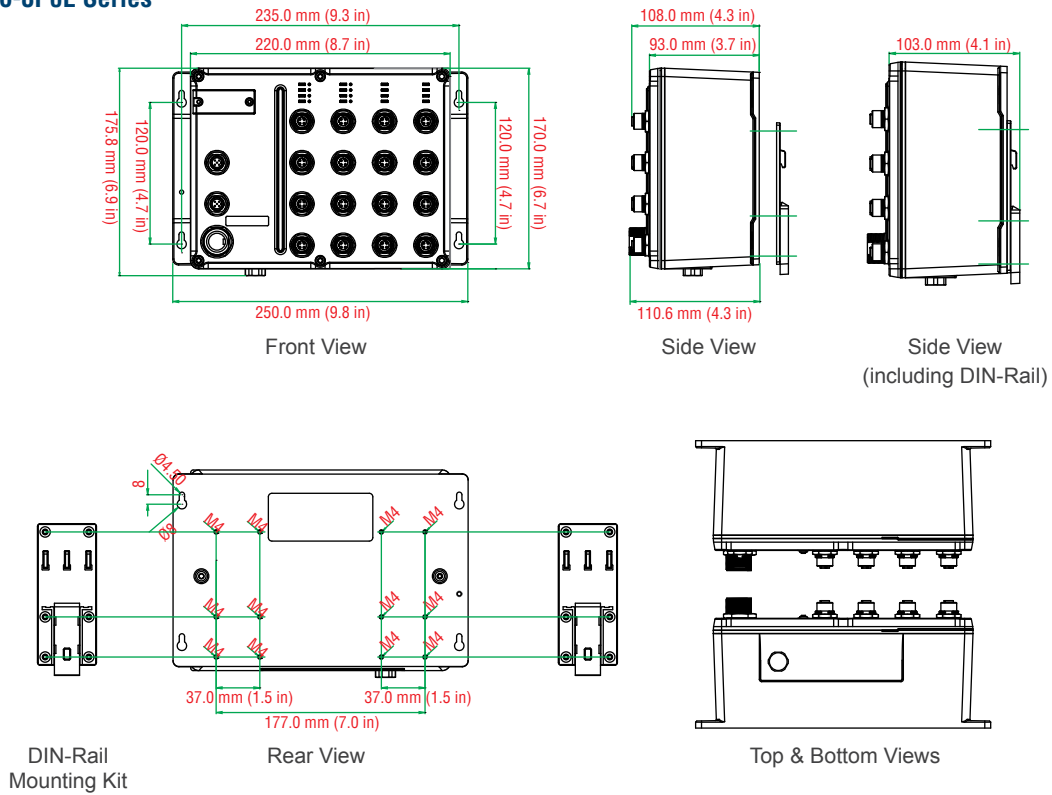

Ordering Information

| Available Models | | Port Interface | | Power Supply | | | | | |
|-------------------------------------|-----------------------------------|--|------------------------------------|-----------------------------|---------------------------|--|-----------------------------|---------------------------|--|
| Standard Temperature (0 to 60°C) | Wide Temperature (-40 to 75°C) | PoE, 10/100BaseT(X) M12 Connector | 10/100BaseT(X) M12 Connector | Power Supply 1 | | | Power Supply 2 | | |
| | | | | 24 VDC (16.8 to 36 V) | 48 VDC (46 to 50 V) | HV: 88 to 300 VDC and 85 to 264 VAC | 24 VDC (16.8 to 36 V) | 48 VDC (46 to 50 V) | HV: 88 to 300 VDC and 85 to 264 VAC |
| TN-5508-4PoE Series | | | | | | | | | |
| TN-5508-4PoE-24 | TN-5508-4PoE-24-T | 4 | 4 | 1 | - | - | - | - | - |
| TN-5508-4PoE-48 | TN-5508-4PoE-48-T | 4 | 4 | - | 1 | - | - | - | - |
| TN-5508-4PoE-HV | TN-5508-4PoE-HV-T | 4 | 4 | - | - | 1 | - | - | - |
| TN-5516-8PoE Series | | | | | | | | | |
| TN-5516-8PoE-24 | TN-5516-8PoE-24-T | 8 | 8 | 1 | - | - | - | - | - |
| TN-5516-8PoE-24-24 | TN-5516-8PoE-24-24-T | 8 | 8 | 1 | - | - | 1 | - | - |
| TN-5516-8PoE-24-48 | TN-5516-8PoE-24-48-T | 8 | 8 | 1 | - | - | - | 1 | - |
| TN-5516-8PoE-24-HV | TN-5516-8PoE-24-HV-T | 8 | 8 | 1 | - | - | - | - | 1 |
| TN-5516-8PoE-48 | TN-5516-8PoE-48-T | 8 | 8 | - | 1 | - | - | - | - |
| TN-5516-8PoE-48-48 | TN-5516-8PoE-48-48-T | 8 | 8 | - | 1 | - | - | 1 | - |
| TN-5516-8PoE-48-HV | TN-5516-8PoE-48-HV-T | 8 | 8 | - | 1 | - | - | - | 1 |
| TN-5516-8PoE-HV | TN-5516-8PoE-HV-T | 8 | 8 | - | - | 1 | - | - | - |
| TN-5516-8PoE-HV-HV | TN-5516-8PoE-HV-HV-T | 8 | 8 | - | - | 1 | - | - | 1 |

Accessories

: M12/M23 Power Cords

CBL-M12D(MM4P)/RJ45-100 IP67

1-meter M12-to-RJ45 Cat-5E UTP Ethernet cable with IP67-rated 4-pin male D-coded M12 connector



CBL-M12(FF5P)/OPEN-100 IP67

1-meter M12-to-5-pin power cable with IP67-rated 5-pin female A-coded M12 connector



CBL-M23(FF5P)/Open-BK-100 IP67

1-meter M23-to-6-pin power cable with IP67-rated female 6-pin M23 connector



: M12 Connectors

M12D-4P-IP68

Field-installable M-12 D-coded screw-in sensor connector, 4-pin male, IP68-rated



M12A-5P-IP68

Field-installable M-12 A-coded screw-in sensor connector, 5-pin female, IP68-rated



: M12 IP67 Protective Caps

A-CAP-M12F-M

Metal cap for M12 female connector



A-CAP-M12M-M

Metal cap for M12 male connector

