

# Chassis Selection Guide

Model No.	Type	Board Type		Max. slots	Drive Capacity				Fan Spec.			
		Slot SBC	Motherboard		5.25" F.P.	3.5" F.P.	2.5" Int	3.5" Int	4 cm	6 cm	8 cm	12 cm
RACK-1150G	1U	PICMG 1.0 full-size/ PICMG 1.3 full-size		3	1			1	3			
RACK-220G	2U	PICMG 1.0 full-size	*MicroATX, Mini-ITX	6	1	1		1			2	
RACK-2100G	2U	PICMG 1.3 full-size		6	1	1		1			2	
RACK-305G	4U	full-size	*ATX, MicroATX, Mini-ITX	14	2	1		1		***2	2	
RACK-360G	4U	full-size	*ATX, MicroATX, Mini-ITX	14	2	1		1		***2		1
RACK-3000G	4U	full-size	*ATX, MicroATX, Mini-ITX	14	3	2		1		***2	2	
RACK-500G	5U	full-size		5		1		1			1	
PAC-1000G		full-size		6	1	1		1			1	
PAC-106G		full-size		6		1		1			1	
PAC-1700G		full-size		7	1	1		2			1	
PAC-125G		full-size		10	2	1		1			1	
PAC-53GH		half-size		3			1					
PAC-42GH		half-size		4		△1		△1			1	
PR-1500G		half-size		5	◇1	1		1			1	
PAC-400G		half-size		5				△1			1	
PAC-700G		half-size		7	1	△1		1			1	

Model No.	Indicators		Front Panel Control					PSU	Dimensions(mm)			Color	
	Power	HDD	Power	Reset	KB	USB	Keylock		Depth	Height	Width	Black	White
RACK-1150G	○	○	○	○		2		1U	449	44	431	○	
RACK-220G	○	○	○	○		2	○	PS/2	487.5	88	431	○	○
RACK-2100G	○	○	○	○		2	○	PS/2, redundant	576.9	88	431	○	
RACK-305G	○	○	○	○	○	2	○	PS/2 or mini redundant	413	176	431	○	○
RACK-360G	○	○	○	○	○	2	○	PS/2 or mini redundant	435.5	176	431	○	○
RACK-3000G	○	○	○	○			○	PS/2 or mini redundant	520	176	431	○	○
RACK-500G	○	○	○	○		2		1U	440.2	221.3	110.6	○	○
PAC-1000G	○	○	○	○				PS/2	421	176	232	○	
PAC-106G	○	○	○	○		2		1U	400	175.5	166		○
PAC-1700G	○	○	○	○				PS/2	433	253.7	192.4	○	
PAC-125G	○	○	○	○		2	○	PS/2	420	176	321		○
PAC-53GH	○	○	○	○		2		1U	218	200	95		○
PAC-42GH	○	○	○	○		2		1U	269	230	140		○
PR-1500G	○	○	○	○		2		1U	254	132	286		○
PAC-400G	○	○	○	○		2		1U	269	230.5	140		○
PAC-700G	○	○	○	○		2	○	1U	279	176	321	○	

■ Rackmount chassis  
■ Full-size wall mount chassis  
■ Half-size wall mount chassis

\* For ATX model      ◇ Slim-type CD-ROM  
 \*\*\* Optional fans for ATX model      △ Please refer to datasheet for detail information

1

Industrial  
Computing  
Solutions

2

Video  
Capture  
Solutions

3

Embedded  
Computing  
Solutions

4

Automation  
Control

5

ORing  
Network  
Communication


6

Power Supply/  
Peripherals


7

Panel  
Solutions  
Introduction

# RACK-1150G/1150G-PE 1U Full-size Rackmount Chassis

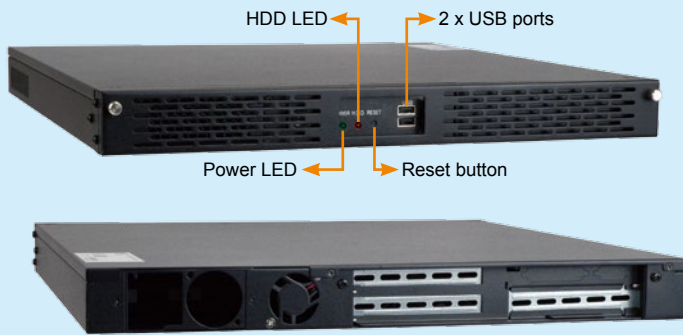

**CD-ROM, and HDD are not included in package.**

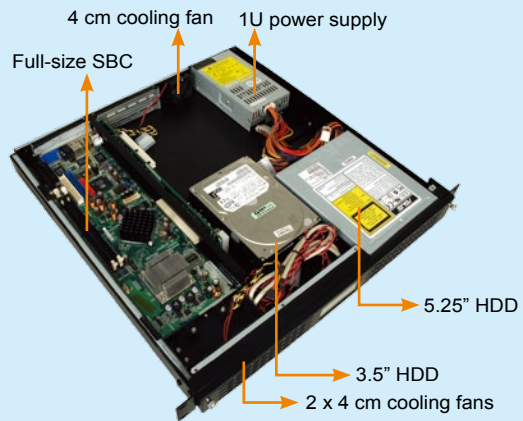

## Features

- ◆ RoHS compliant design
- ◆ Two front-accessible USB ports
- ◆ One 5.25" drive bay
- ◆ One 3.5" internal hard drive bay
- ◆ Three, 4 cm cooling fans

## Specifications


◆ Construction	Heavy duty metal
◆ SBC Form Factor	Full-size, slot CPU card
◆ Drive Bays	1 x 5.25" 1 x 3.5" HDD (internal)
◆ Cooling Fans	3 x 4 cm
◆ I/O Ports	2 x USB
◆ I/O Openings	1 x COM, 1 x LPT
◆ Expansion Slots	3 slots/2 slots (PE)
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset button
◆ Operating Temperature	0°C ~ 50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	B: Black
◆ Weight (Net/Gross)	7.5 kg/9.5 kg
◆ Dimensions (DxWxH)	449 mm x 431 mm x 44 mm

RACK-1150G and RACK-1151G support processors with a maximum TDP of 31 W only.

## Ordering Information

Part No.	Description
<b>RACK-1150GB-PE-R11/A618A</b>	1U 2-slot full-size rackmount chassis for PICMG 1.3 backplane, Black, 3 x 4cm fan, with ACE-A618A-RS-R11 (180W ATX model), RoHS
<b>RACK-1150GB-R11/A618A</b>	1U 3-slot full-size rackmount chassis for PICMG 1.0 backplane, Black, 3 x 4cm fan, with ACE-A618A-RS-R11 (180W ATX model), RoHS

## Dimensions (measurement units: millimeter)

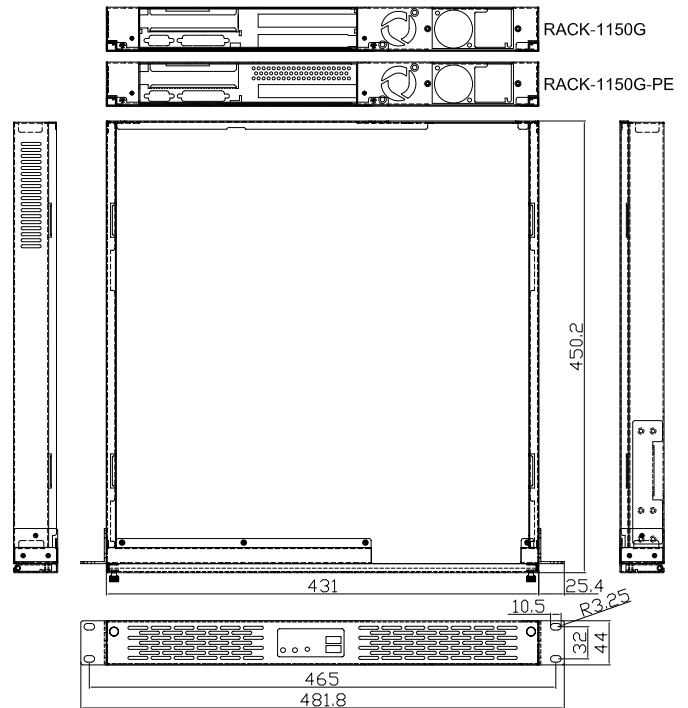

## Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
PCI-2SD2-RS	PICMG 1.0	2	0	0	0	0	ATX
PE-2SD1*	PICMG 1.3	0	0	0	0	1	ATX
PE-2SD2*	PICMG 1.3	1	0	0	0	0	ATX

Adapter cable 32100-040600-RS is required when connecting PCI-2SD2-RS to a standard ATX supply.

\* For RACK-1150G-PE

## Power Supply Options

Type	Model No.	Watt
ATX	ACE-A618A-RS-R11	180W
	ACE-A225A-R10	250W
	ACE-4520C-RS	200W

RACK-1150G supports single 1U height PSU. For more IEI PSU models, please refer to section 5 or visit [www.ieiworld.com](http://www.ieiworld.com).

1

Industrial Computing Solutions

2

Video Capture Solutions

3

Embedded Computing Solutions

4

Automation Control

5

ORing Network Communication


6

Power Supply/Peripherals

7

Panel Solutions Introduction

# RACK-220G 2U 6-slot Full-size Rackmount Chassis

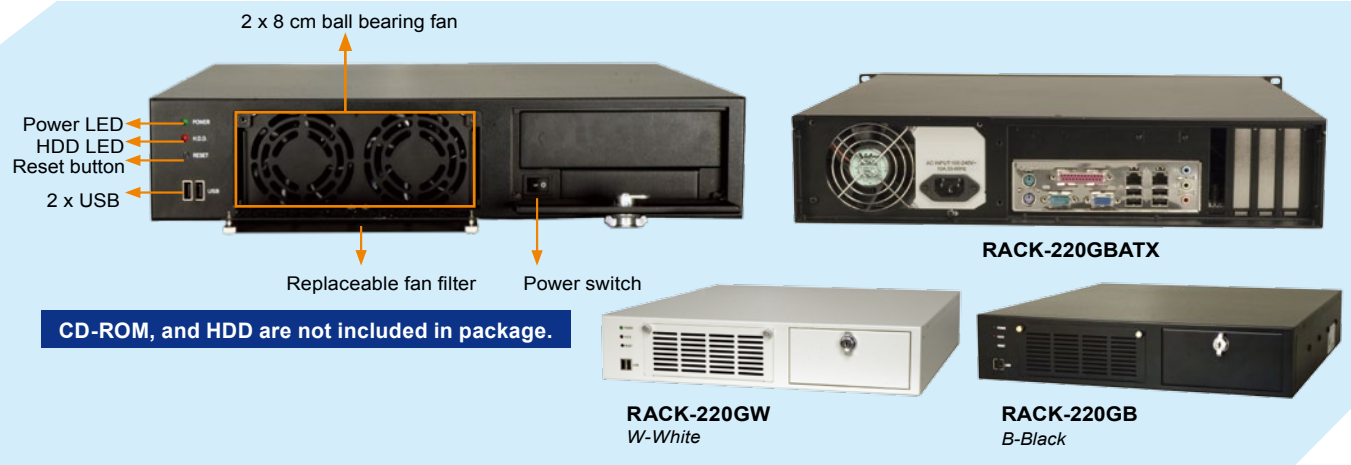

## Features

- ◆ RoHS compliant design
- ◆ Two USB ports on the front panel
- ◆ Two, 8 cm cooling fans with replaceable fan filter
- ◆ One 5.25" and one 3.5" drive bay
- ◆ One 3.5" internal hard drive bay
- ◆ Lockable door prevents unauthorized access

## Specifications


◆ Construction	Heavy duty metal
◆ SBC Form Factor	Full-size, slot CPU card
◆ Drive Bays	1 x 5.25" 1 x 3.5" 1 x 3.5" HDD (internal)
◆ Cooling Fans	2 x 8 cm
◆ I/O Ports	2 x USB
◆ Expansion Slots	6 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset button
◆ Operating Temperature	0°C ~ 50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	W: White/B: Black
◆ Weight (Net/Gross)	8.2 kg/12.4 kg
◆ Dimensions (DxWxH)	487.5 mm x 431 mm x 88 mm

## Ordering Information

Part No.	Description
RACK-220G [C] /A130B	2U 6-slot full-size rackmount chassis for PICMG 1.0 SBC, (Black/White), 2 x 8 cm fan, with ACE-A130B-R10 (300W ATX model), RoHS
RACK-220G [C] ATX/A130B	2U microATX motherboard rackmount chassis, (Black/White), 2 x 8 cm fan, with ACE-A130B-R10 (300W ATX model), RoHS

[C] Color Code: B-Black W-White  
Full-size card cannot be installed in chassis because of the height limitation.

## Dimensions (measurement units: millimeter)

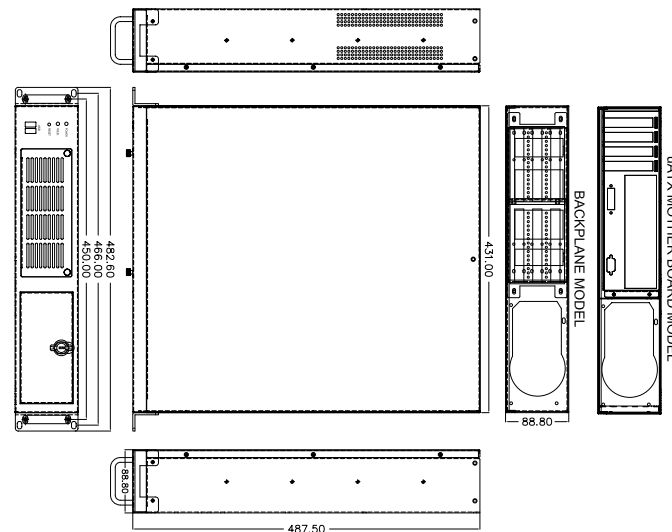

## Selection Guide

Model No.	SBC Type	PSU Type	Color Options
RACK-220G [C]	PICMG 1.0	PS/2	black/white
RACK-220G [C] ATX	microATX MB	PS/2	black/white

## Backplane Options

Model No.	SBC Type	PCI	ISA	PCle			PSU Connector
				x1	x4	x16	
PCI-5SDA-RS	PICMG 1.0	L2+R2	0	0	0	0	AT/ATX
PCI-5SD5-RS	PICMG 1.0	L2+R2	0	0	0	0	AT
PCI-5SD6-RS	PICMG 1.0	L2+R2	0	0	0	0	ATX
PCI-6SD-RS	PICMG 1.0	L1+R1	L1+R1	0	0	0	ATX


## Power Supply Options

Type	Model No.	Watt
AT	ACE-925AP-U-RS	250W
	ACE-935AL-RS	300W
ATX	ACE-A130B-R10	300W
	ACE-A140A-S-R10	400W

RACK-220G supports single PS/2 PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.

- 1 Industrial Computing Solutions
- 2 Video Capture Solutions
- 3 Embedded Computing Solutions
- 4 Automation Control
- 5 ORing Network Communication
- 6 Power Supply/Peripherals
- 7 Panel Solutions Introduction

# RACK-2100G 2U 6-slot Full-size Rackmount Chassis

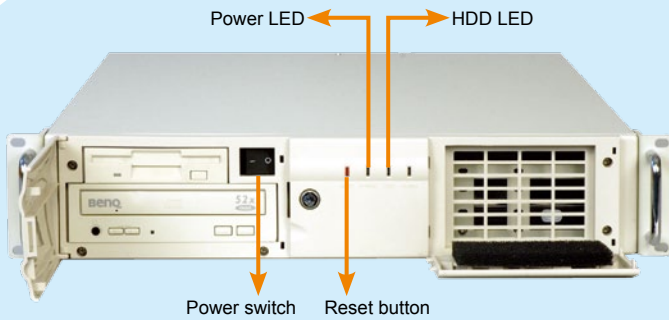

CD-ROM, and HDD are not included in package.

## Features

- ◆ RoHS compliant design
- ◆ Stylish front panel with keylock
- ◆ One 5.25" and one 3.5" drive bay
- ◆ Two 8 cm cooling fans with easy replaceable fan filter
- ◆ Lockable door prevents unauthorized access

## Specifications

◆ Construction	Heavy duty metal with plastic front panel
◆ SBC Form Factor	Full-size, slot CPU card
◆ Drive Bays	1 x Front accessible 3.5" 1 x 3.5" HDD (internal) 1 x 5.25"
◆ Cooling Fans	2 x 8 cm
◆ Expansion Slots	6 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset button
◆ Operating Temperature	0°C ~ 50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	W: White/B: Black
◆ Weight (Net/Gross)	7.8 kg/11.8 kg
◆ Dimensions (DxWxH)	576.9 mm x 431 mm x 88 mm


## Selection Guide

Model No.	SBC Type	PSU Type	Color Options
RACK-2100G	PICMG 1.3	PS/2	black/white
RACK-2100GBR	PICMG 1.3	redundant	black

## Ordering Information

Part No.	Description
<b>RACK-2100GB/A130B</b>	2U 6-slot full-size rackmount chassis for PICMG 1.3 SBC, White, 2 x 8 cm fan, with ACE-A130B-RS (300W ATX model), RoHS
<b>RACK-2100GBR/ACE-R4130AP</b>	2U 6-slot full-size rackmount chassis for PICMG 1.3 SBC, black, with ACE-R4130AP-RS, RoHS

## Dimensions (measurement units: millimeter)

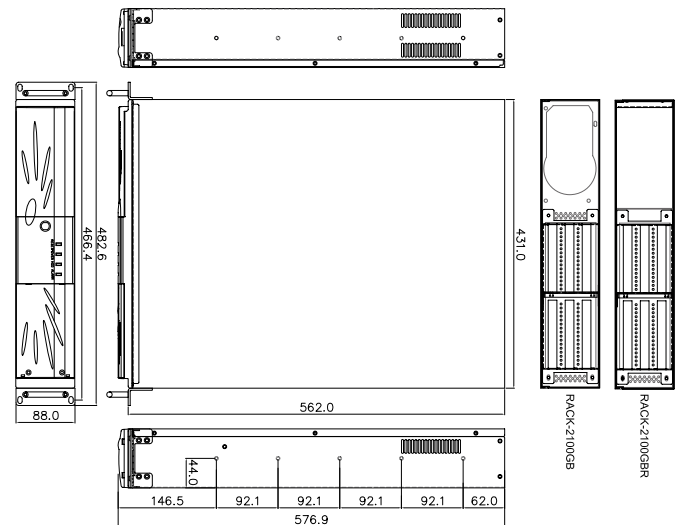

## Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
PE-6SD	PICMG 1.3	0	0	3	0	1	ATX
PE-6SD2	PICMG 1.3	1	0	2	0	1	ATX
PE-6SD3-RS	PICMG 1.3	2	0	0	1	1	ATX

## Power Supply Options

Type	Model No.	Watt
AT	ACE-925AP-U-RS	250W
	ACE-935AL-RS	300W
ATX	ACE-A130B-RS	300W
	ACE-A140A-S-RS	400W
ATX Redundant*	ACE-R4130AP-RS	300W
	ACE-R4140AP-RS	400W

\*Only RACK-2100GBR can support ATX redundant power supply. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.

1

Industrial Computing Solutions

2

Video Capture Solutions

3

Embedded Computing Solutions

4

Automation Control

5

ORing Network Communication

6

Power Supply/Peripherals

7

Panel Solutions Introduction

# RACK-305G 4U 14-slot Full-size Rackmount Chassis



**CD-ROM, and HDD are not included in package.**

## Features

- ◆ RoHS compliant design
- ◆ Two USB ports on the front panel
- ◆ Dual reset buttons for dual systems
- ◆ Two 8 cm cooling fans with replaceable fan filters
- ◆ Lockable door prevents unauthorized access

## Specifications


◆ Construction	Heavy duty metal
◆ SBC Form Factor	Full-size, slot CPU card
◆ Drive Combinations	3 x 5.25" + 1 x 3.5" HDD or 2 x 5.25" + 2 x 3.5" HDD or 2 x 5.25" + 1 x 3.5" HDD + 1 x front accessible 3.5" or 2 x 5.25" + 2 x front accessible 3.5"
◆ Cooling Fans	2 x 8 cm
◆ I/O Ports	2 x USB
◆ Expansion Slots	14 slots for RACK-305G 7 slots for RACK-305GATX
◆ Indicators	Power, HDD
◆ Buttons	1 x Power switch, 2 x reset buttons
◆ Operating Temperature	0°C ~ 50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	W: White/B: Black
◆ Weight (Net/Gross)	10.4 kg/15 kg
◆ Dimensions (DxWxH)	413 mm x 431 mm x 176 mm

## Ordering Information

Part No.	Description
RACK-305G [C] -R22/ACE-935AL	4U 14-slot rackmount chassis, USB, (Black/White), W/ACE-935AL-RS PSU (300W), RoHS
RACK-305G [C] -R22/A130B	4U 14-slot rackmount chassis, (Black/White), 2 x 8 cm fan, with ACE-A130B-R10 (300W ATX model), RoHS
RACK-305G [C] ATX-R22/A130B	4U ATX motherboard rackmount chassis, (Black/White), 2 x 8 cm fan, with ACE-A130B-R10 (300W ATX model), RoHS

[C] Color Code: B-Black W-White

## Dimensions (measurement units: millimeter)

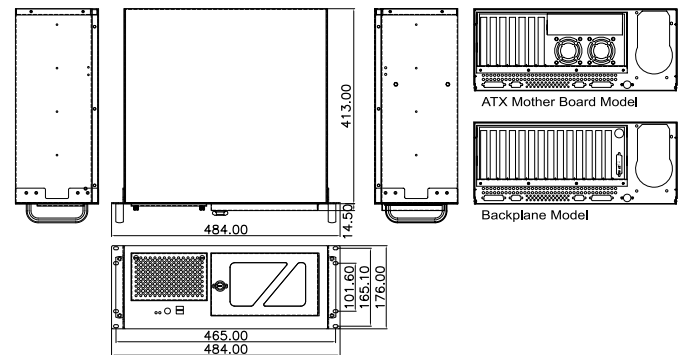

## Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe				PSU Connector
				x1	x4	x16	PCIX	
PCI-13SD-RS	PICMG 1.0	3+4	3+3	0	0	0	0	AT/ATX
PCI-14S2-RS	PICMG 1.0	4	8	0	0	0	0	AT/ATX
PCI-14S3-RS	PICMG 1.0	4	9	0	0	0	0	AT/ATX
PX-14S3-RS	PICMG 1.0	12	2	0	0	0	0	AT/ATX
PX-14S5-RS	PICMG 1.0	7	6	0	0	0	0	AT/ATX
BP-14S-RS	ISA	0	14	0	0	0	0	AT
PE-6S	PICMG 1.3	2	0	2	0	1	0	ATX
PE-10S	PICMG 1.3	4	0	4	0	1	0	ATX
PE-10S2	PICMG 1.3	4	0	4	0	1	0	ATX
PXE-12S	PICMG 1.3	4	0	0	0	1	6	ATX
PE-13SD	PICMG 1.3	4	0	4	1	2	0	ATX
PXE-13S	PICMG 1.3	8	0	3	0	1	0	ATX
SPXE-14S	PICMG 1.3	0	0	12	0	0	0	ATX

## Power Supply Options

Type	Model No.	Watt
AT	ACE-935AL-RS	300W
	ACE-T140A-RS	400W
ATX	ACE-A130B-R10	300W
	ACE-A140A-S-R10	400W
	ACE-A160A-R10	600W
ATX Redundant	ACE-R4130AP-RS	300W
	ACE-R4140AP-RS	400W

RACK-305G supports single PS/2 PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.

1 Industrial Computing Solutions

2 Video Capture Solutions

3 Embedded Computing Solutions

4 Automation Control


5 ORing Network Communication

6 Power Supply/Peripherals

7 Panel Solutions Introduction



# RACK-360G 4U 14-slot Full-size Rackmount Chassis

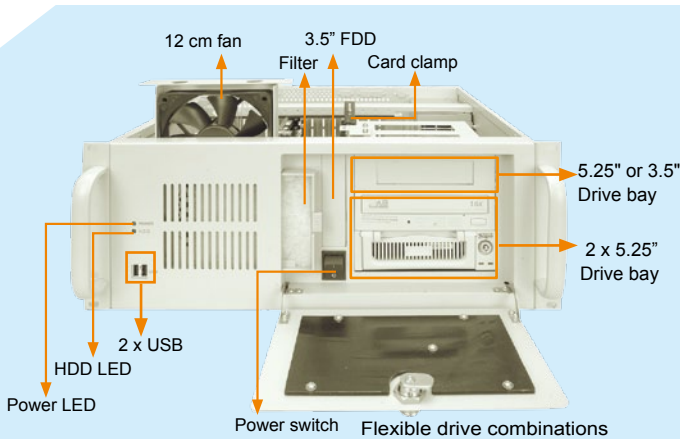


## Features

- ◆ Cost-effective, RoHS compatible design
- ◆ Flexible drive combinations
- ◆ Two USB ports on the front panel
- ◆ 12 cm cooling fan with replaceable fan filter
- ◆ Lockable door prevents unauthorized access

## Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Full-size, slot CPU card
◆ Drive Combinations	3 x 5.25" + 1 x 3.5" HDD or 2 x 5.25" + 2 x 3.5" HDD or 2 x 5.25" + 1 x 3.5" HDD + 1 x front accessible 3.5" or 2 x 5.25" + 2 x front accessible 3.5"
◆ Cooling Fans	1 x 12 cm
◆ I/O Ports	2 x USB
◆ I/O Openings	2 x COM, 2 x LPT
◆ Expansion Slots	14 slots for RACK-360G 7 slots for RACK-360GATX
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset button
◆ Operating Temperature	0°C ~ 50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	B: Black/W: White
◆ Weight (Net/Gross)	11 kg/15.4 kg
◆ Dimensions (DxWxH)	435.5 mm x 431mm x 176 mm

## Dimensions (measurement units: millimeter)

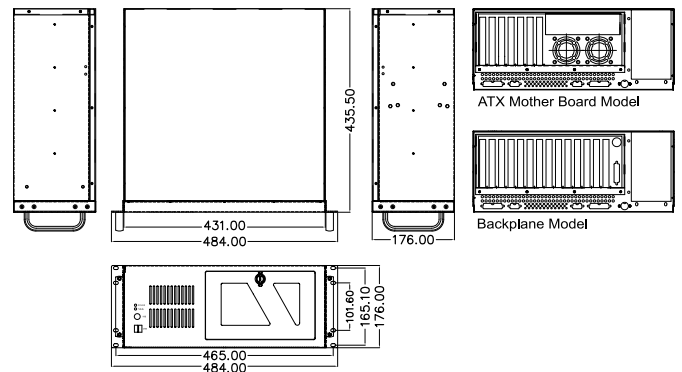

## Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe				PSU Connector
				x1	x4	x16	PCIX	
PCI-13SD-RS	PICMG 1.0	3+4	3+3	0	0	0	0	AT/ATX
PCI-14S2-RS	PICMG 1.0	4	8	0	0	0	0	AT/ATX
PCI-14S3-RS	PICMG 1.0	4	9	0	0	0	0	AT/ATX
PX-14S3-RS	PICMG 1.0	12	2	0	0	0	0	AT/ATX
PX-14S5-RS	PICMG 1.0	7	6	0	0	0	0	AT/ATX
BP-14S-RS	ISA	0	14	0	0	0	0	AT
PE-6S	PICMG 1.3	2	0	2	0	1	0	ATX
PE-10S	PICMG 1.3	4	0	4	0	1	0	ATX
PE-10S2	PICMG 1.3	4	0	4	0	1	0	ATX
PXE-12S	PICMG 1.3	4	0	0	0	1	6	ATX
PE-13SD	PICMG 1.3	4	0	4	1	2	0	ATX
PXE-13S	PICMG 1.3	8	0	3	0	1	0	ATX
SPXE-14S	PICMG 1.3	0	0	12	0	0	0	ATX

## Power Supply Options

Type	Model No.	Watt
AT	ACE-935AL-RS	300W
	ACE-T140A-RS	400W
ATX	ACE-A130B-R10	300W
	ACE-A140A-S-R10	400W
	ACE-A160A-R10	600W
ATX Redundant	ACE-R4130AP-RS	300W
	ACE-R4140AP-RS	400W

RACK-360G supports single PS/2 PSU. For more IEI PSU models, please refer to section 5 or visit [www.ieiworld.com](http://www.ieiworld.com).

## Ordering Information

Part No.	Description
RACK-360G [C] -R22/ACE-935AL	4U 14-slot rackmount chassis, USB, (Black/White), W/ACE-935AL-RS PSU (300W), RoHS
RACK-360G [C] -R22/A130B	4U 14-slot rackmount chassis, (Black/White), 1 x 12 cm fan, with ACE-A130B-R10 (300W ATX model), RoHS
RACK-360G [C] ATX-R22/A130B	4U ATX motherboard rackmount chassis, (Black/White), 1 x 12 cm fan, with ACE-A130B-R10 (300W ATX model), RoHS

[C] Color Code: B-Black W-White

1

Industrial Computing Solutions

2

Video Capture Solutions

3

Embedded Computing Solutions

4

Automation Control

5

ORing Network Communication


6

Power Supply/Peripherals

7

Panel Solutions Introduction

# RACK-3000G 4U 14-slot Full-size Rackmount Chassis

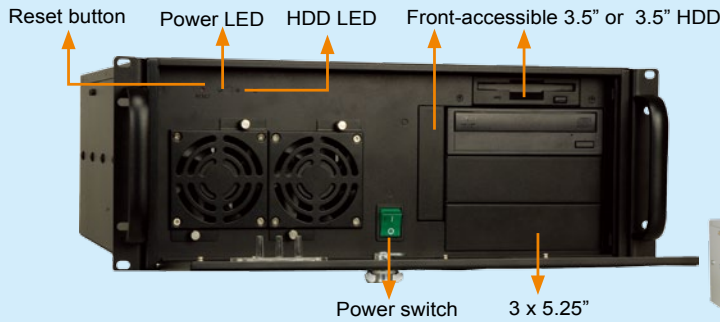

RACK-3000GBATX



RACK-3000GW



RACK-3000GB

CD-ROM and HDD are not included in package.


## Features

- ◆ RoHS compliant design
- ◆ Compatible with ATX and microATX form factor motherboards
- ◆ Three 5.25" and three 3.5" drive bays
- ◆ Two 8 cm cooling fans
- ◆ Lockable door prevents unauthorized access

## Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Full-size, slot CPU card
◆ Drive Bays	3 x 5.25" + 1 x front-accessible 3.5" + 2 x 3.5" HDD
	or 3 x 5.25" + 2 x front-accessible 3.5" + 1 x 3.5" HDD
	or 3 x 5.25" + 3 x 3.5" HDD
◆ Cooling Fans	2 x 8 cm
◆ I/O Openings	2 x COM, 2 x LPT, 1 x PS2
◆ Expansion Slots	14 slots for RACK-3000G 7 slots for RACK-3000GATX
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset button
◆ Operating Temperature	0°C ~ 50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	W: White/B: Black
◆ Weight (Net/Gross)	13 kg/18 kg
◆ Dimensions (DxWxH)	520 mm x 431 mm x 176 mm

## Dimensions (measurement units: millimeter)

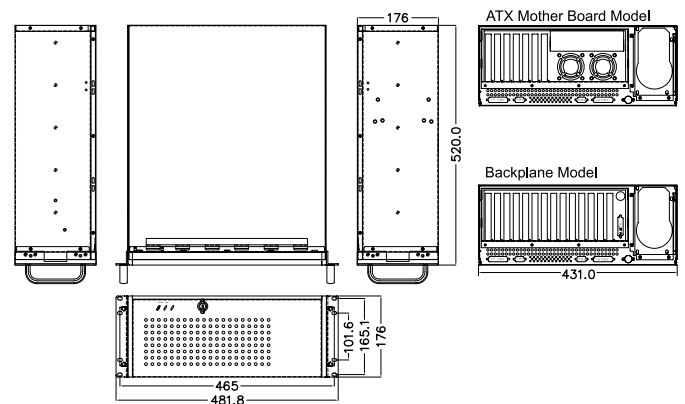

## Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe				PSU Connector
				x1	x4	x16	PCIX	
BP-14S-RS	ISA	0	14	0	0	0	0	AT
PCI-13SD-RS	PICMG 1.0	3+4	3+3	0	0	0	0	AT/ATX
PCI-14S2-RS	PICMG 1.0	4	8	0	0	0	0	AT/ATX
PCI-14S3-RS	PICMG 1.0	4	9	0	0	0	0	AT/ATX
PX-14S3-RS	PICMG 1.0	12	2	0	0	0	0	AT/ATX
PX-14S5-RS	PICMG 1.0	7	6	0	0	0	0	AT/ATX
PE-6S	PICMG 1.3	2	0	2	0	1	0	ATX
PE-10S	PICMG 1.3	4	0	4	0	1	0	ATX
PE-10S2	PICMG 1.3	4	0	4	0	1	0	ATX
PXE-12S	PICMG 1.3	4	0	0	0	1	6	ATX
PE-13SD	PICMG 1.3	4	0	4	1	2	0	ATX
PXE-13S	PICMG 1.3	8	0	3	0	1	0	ATX
SPXE-14S	PICMG 1.3	0	0	12	0	0	0	ATX

## Power Supply Options

Type	Model No.	Watt
AT	ACE-935AL-RS	300W
	ACE-T140A-RS	400W
ATX	ACE-A130B-R10	300W
	ACE-A140A-S-R10	400W
	ACE-A160A-R10	600W
ATX Redundant	ACE-R4130AP-RS	300W
	ACE-R4140AP-RS	400W


RACK-3000G supports single PS/2 PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.

## Ordering Information

Part No.	Description
RACK-3000G  -R21/A130B	4U 14-slot rackmount chassis, (Black/White), 2 x 8 cm fan, with ACE-A130B-R10 (300W ATX model), RoHS
RACK-3000G  ATX-R21/A130B	4U ATX motherboard rackmount chassis, (Black/White), 2 x 8 cm fan, with ACE-A130B-R10 (300W ATX model), RoHS

Color Code: B-Black W-White

# RACK-500G 5U 5-slot Full-size Rackmount Chassis

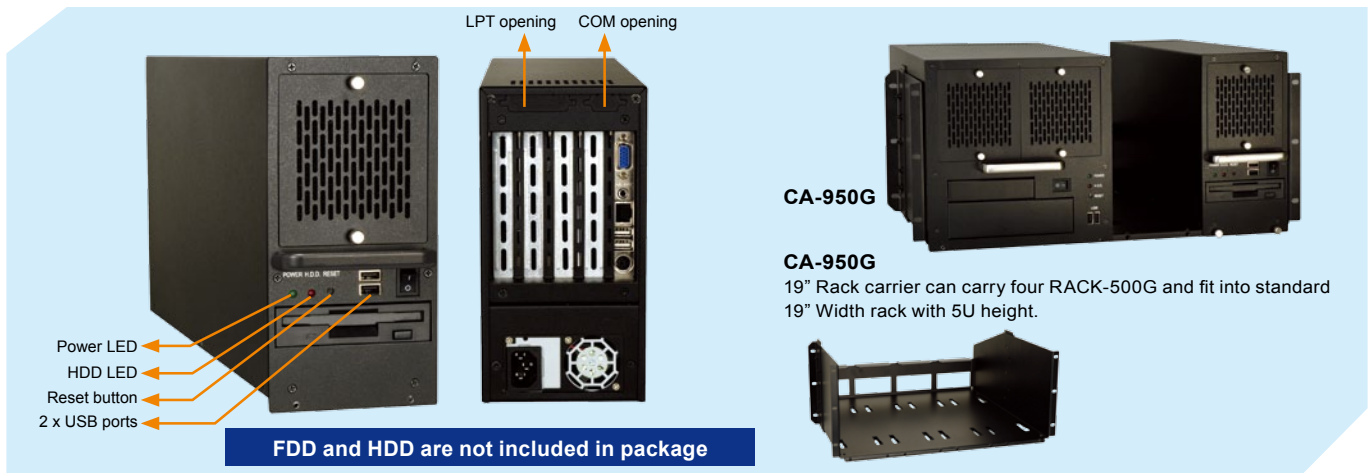


## Features

- ◆ RoHS compliant design
- ◆ 2 x USB ports on front panel
- ◆ 1 x front-accessible 3.5" and 1 x 3.5" HDD drive capacity
- ◆ Hot-swappable 8 cm cooling fan
- ◆ 19" rack-mountable carrier (optional)

## Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Full-size, slot CPU cards
◆ Drive Bays	1 x front-accessible 3.5" 1 x 3.5" HDD
◆ Cooling Fans	1 x 8 cm
◆ I/O Ports	2 x USB
◆ I/O Openings	1 x LPT, 1 x COM
◆ Expansion Slots	5 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	W: White/B: Black
◆ Weight (Net/Gross)	6 kg/9 kg
◆ Dimensions (DxWxH)	440.2 mm x 110.6 mm x 221.3 mm

## Dimensions (measurement units: millimeter)

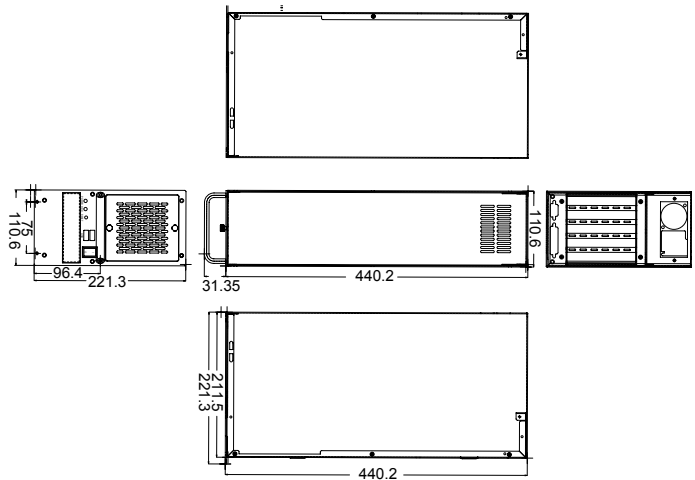

## Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
PCI-5S2-RS	PICMG 1.0	4	1	0	0	0	AT
PCI-5S2A-RS	PICMG 1.0	4	1	0	0	0	ATX
PE-5S2	PICMG 1.3	0	0	3	0	1	ATX
PE-5S	PICMG 1.3	2	0	0	1	1	ATX
HPE-5S1	PCI/PICOe	4	0	0	0	0	ATX
HPE-5S2	PCI/PICOe	4	0	0	0	0	ATX
HPE-5S3	PCI/PICOe	2	0	2	0	0	ATX

Only R20 or later versions support PICMG 1.3 backplane.

## Ordering Information

Part No.	Description
<b>RACK-500G</b> <span style="border: 1px solid black; padding: 0 2px;">C</span> -R21/A618A	5U 5-slot full-size chassis, (Black/White), 1 x 8 cm fan, with ACE-A618A-RS-R11 (180W ATX model), RoHS PSU
<b>CA-950G</b> <span style="border: 1px solid black; padding: 0 2px;">C</span>	19" rack carrier for RACK-500G and RACK-900G, (Black/White), RoHS

C Color Code: B-Black W-White

## Power Supply Options

Type	Model No.	Watt
AT	ACE-916AP-RS	150W
	ACE-A618A-RS-R11	180W
ATX	ACE-A225A-RS	250W

RACK-500G supports single 1U height AT type PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.

1

Industrial Computing Solutions

2

Video Capture Solutions

3

Embedded Computing Solutions

4

Automation Control

5

ORing Network Communication

6


Power Supply/Peripherals

7

Panel Solutions Introduction



# PAC-1000G 6-slot Full-size Compact Chassis

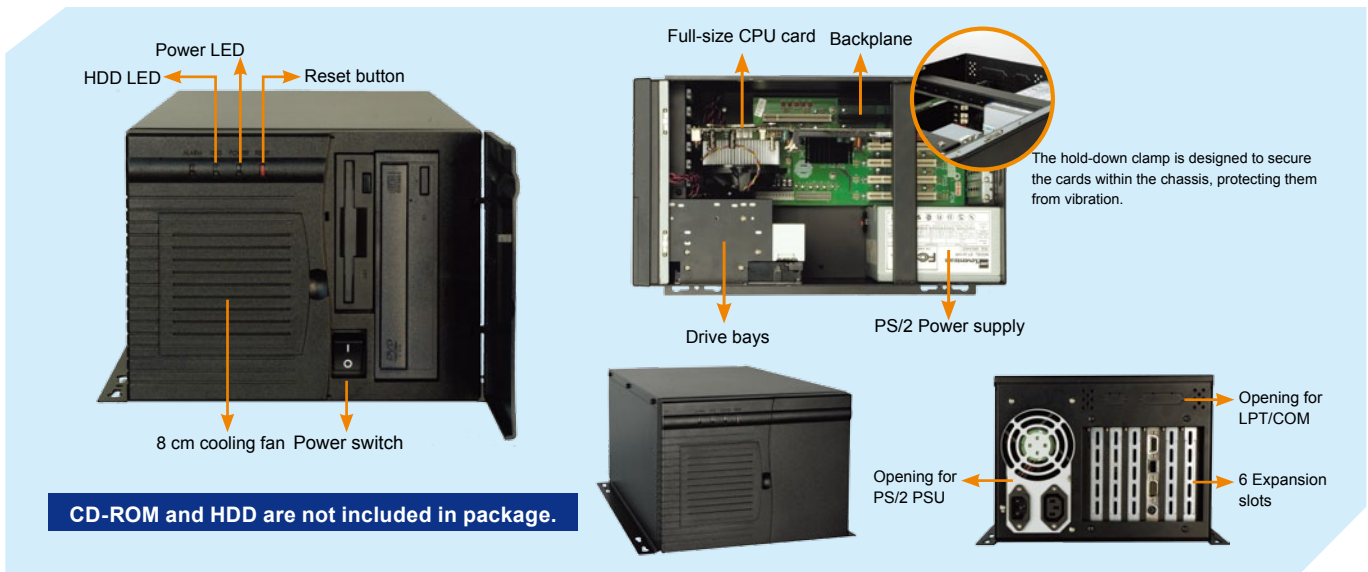

## Features

- ◆ RoHS compliant design
- ◆ One, 8 cm cooling fan with replaceable fan filter
- ◆ Plastic front panel with cover door


## Specifications

◆ Construction	Metal with plastic front panel
◆ SBC Form Factor	Full-size, slot CPU card
◆ Drive Bays	1 x front-accessible 3.5"
	1 x 5.25"
	1 x 3.5" HDD
◆ Cooling Fans	1 x 8 cm
◆ I/O Openings	1 x LPT, 1 x COM
◆ Expansion Slots	6 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	B: Black
◆ Weight (Net/Gross)	5.6 kg/8.8 kg
◆ Dimensions (DxWxH)	421 mm x 232 mm x 176 mm

## Ordering Information

Part No.	Description
PAC-1000GB-R20/A130B	6-slot full-size compact chassis, white, 1 x 8 cm fan, with ACE-A130B-R10 (300W ATX model), RoHS

## Dimensions (measurement units: millimeter)

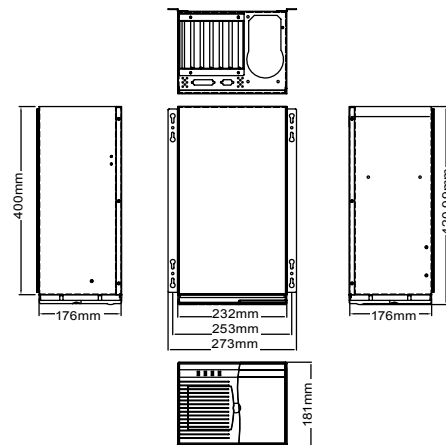

## Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe				PSU Connector
				x1	x4	x8	x16	
BP-6S-RS	ISA	0	6	0	0	0	0	AT
IP-6S-RS	PCISA	3	2	0	0	0	0	AT
IP-6SA-RS	PCISA	3	2	0	0	0	0	ATX
PCI-6S-RS	PICMG 1.0	4	2	0	0	0	0	AT/ATX
PCI-5S-RS	PICMG 1.0	3	1	0	0	0	0	AT/ATX
*PE-6S2	PICMG 1.3	3	0	0	1	0	1	ATX
*PE-6S3	PICMG 1.3	1	0	3	0	0	1	ATX
SPE-4S	PICMG 1.3	0	0	0	1	2	0	ATX
SPE-6S	PICMG 1.3	0	0	0	5	0	0	ATX

\*Only R20 or later versions support PICMG 1.3 backplane

## Power Supply Options

Type	Model No.	Watt
AT	ACE-925AP-U-RS	250W
	ACE-T140A-RS	400W
ATX	ACE-A130B-R10	300W
	ACE-A140A-S-R10	400W
	ACE-828V-RS	250W

PAC-1000G supports single PS/2 PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.

1

Industrial Computing Solutions

2

Video Capture Solutions

3

Embedded Computing Solutions

4

Automation Control

5

ORing Network Communication


6

Power Supply/Peripherals

7

Panel Solutions Introduction

# PAC-106G 6-slot Full-size Compact Chassis

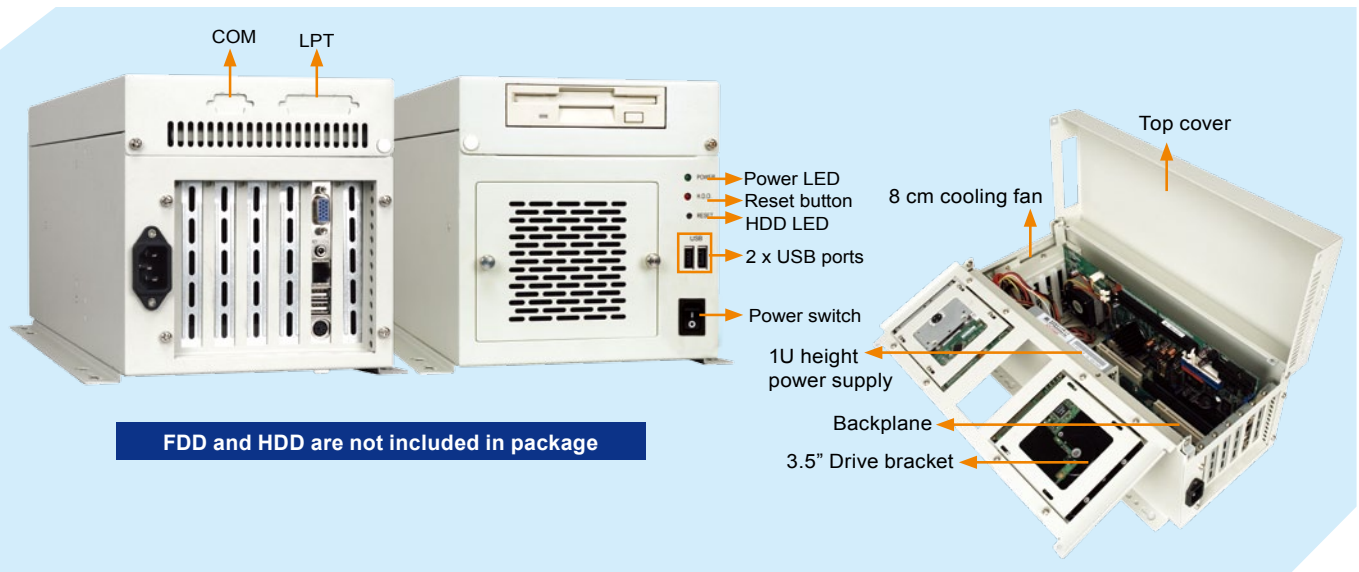


## Features

- ◆ RoHS compliant design
- ◆ Two USB ports on the front panel
- ◆ One 3.5" drive bay and one internal 3.5" HDD bay
- ◆ One, 8 cm cooling fan

## Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Full-size, slot CPU card
◆ Drive Bays	1 x front-accessible 3.5"
	1 x 3.5" HDD
◆ Cooling Fans	1 x 8 cm
◆ I/O Ports	2 x USB
◆ I/O Openings	1 x COM, 1 x LPT
◆ Expansion Slots	6 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	W: White
◆ Weight (Net/Gross)	5.2 kg/7.8 kg
◆ Dimensions (DxWxH)	400 mm x 166 mm x 175.5 mm

## Dimensions (measurement units: millimeter)

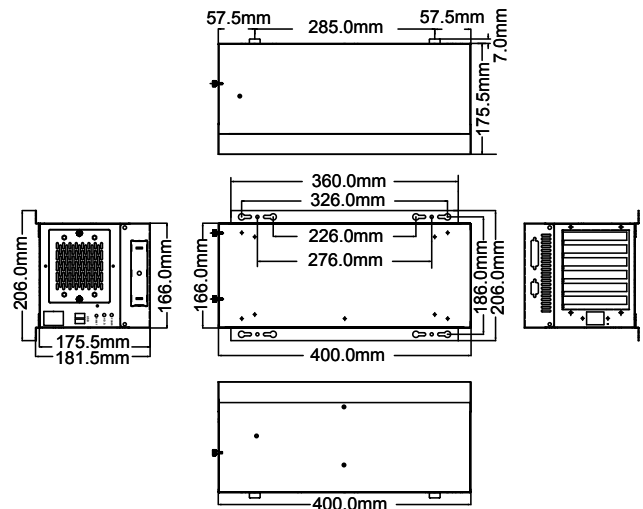

## Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe				PSU Connector
				x1	x4	x8	x16	
BP-6S-RS	ISA	0	6	0	0	0	0	AT
IP-6S-RS	PCISA	3	2	0	0	0	0	AT
IP-6SA-RS	PCISA	3	2	0	0	0	0	ATX
PCI-6S-RS	PICMG 1.0	4	2	0	0	0	0	AT/ATX
*PE-6S2	PICMG 1.3	3	0	0	1	0	1	ATX
*PE-6S3	PICMG 1.3	1	0	3	0	0	1	ATX
SPE-4S	PICMG 1.3	0	0	0	1	2	0	ATX
SPE-6S	PICMG 1.3	0	0	0	5	0	0	ATX

\*Only R20 or later versions support PICMG 1.3 backplane

## Power Supply Options

Type	Model No.	Watt
AT	ACE-916AP-RS	150W
ATX	ACE-A618A-RS-R11	180W

PAC-106G supports single 1U height PSU. For more IEI PSU models, please refer to section 5 or visit [www.ieiworld.com](http://www.ieiworld.com).

## Ordering Information

Part No.	Description
PAC-106GW-R21/A618A	6-slot full-size compact chassis, white, 1 x 8 cm fan, with ACE-A618A-RS-R11 (180W ATX model), RoHS

1

Industrial Computing Solutions

2

Video Capture Solutions

3

Embedded Computing Solutions

4

Automation Control

5

ORing Network Communication


6

Power Supply/Peripherals

7

Panel Solutions Introduction

# PAC-1700G 7-slot Full-size Compact Chassis

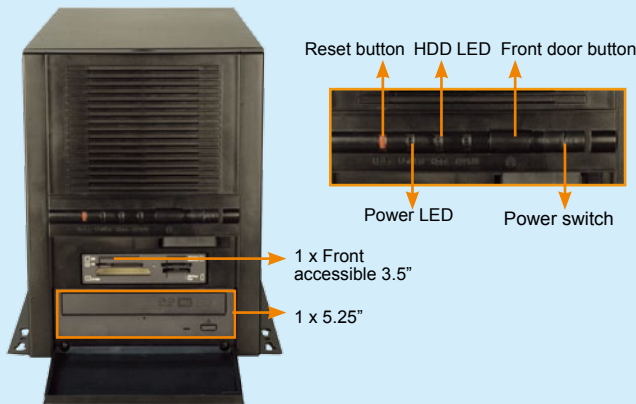

CD-ROM and HDD are not included in package.



Replaceable fan filter

8 cm cooling fan

## Features

- ◆ RoHS compliant design
- ◆ One 5.25" and one 3.5" drive bay
- ◆ Two 3.5" internal HDD bays
- ◆ Seven expansion slots, compatible with full-size SBC
- ◆ 7 expansion slots, compatible with full-size SBC


## Specifications

◆ Construction	Metal with plastic front panel
◆ SBC Form Factor	Full-size, slot CPU card
◆ Drive Bays	1 x front-accessible 3.5"
	1 x 5.25"
	2 x 3.5" HDD
◆ Cooling Fans	1 x 8 cm
◆ I/O Openings	1 x LPT, 2 x COM
◆ Expansion Slots	7 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	B: Black
◆ Weight (Net/Gross)	6 kg/8.4 kg
◆ Dimensions (DxWxH)	433 mm x 233 mm x 253.7 mm

## Ordering Information

Part No.	Description
PAC-1700GB-R20/A130B	7-slot full-size compact chassis, black, 1 x 8 cm fan, with ACE-A130B-R10 (300W ATX model), RoHS

## Dimensions (measurement units: millimeter)

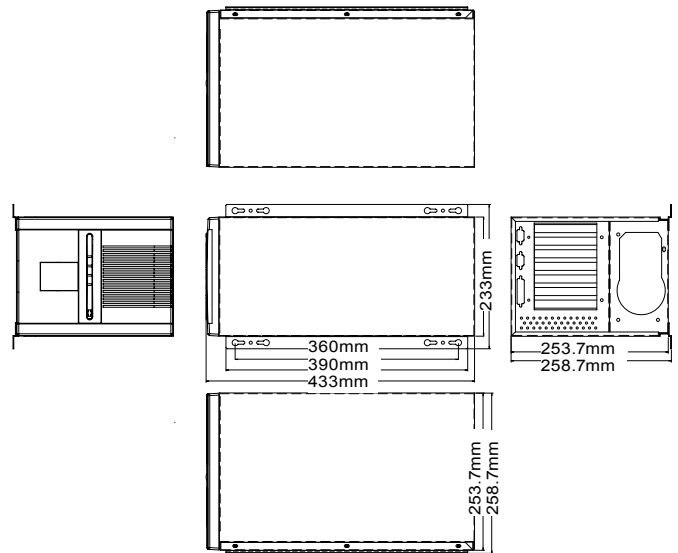

## Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
IP-7SA-RS	PCISA	4	2	0	0	0	AT
PCI-7S-RS	PICMG 1.0	4	3	0	0	0	AT/ATX
*PE-7S	PICMG 1.3	3	0	2	0	1	ATX
*PE-7S2	PICMG 1.3	1	0	4	0	1	ATX
HPE-7S1	PCI/PIC0e	4	0	2	0	0	ATX

\*Only R20 or later versions support PICMG 1.3 backplane


## Power Supply Options

Type	Model No.	Watt
AT	ACE-925AP-U-RS	250W
	ACE-T140A-RS	400W
ATX	ACE-A130B-R10	300W
	ACE-A140A-S-R10	400W

PAC-1700G supports single PS/2 PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.

- 1 Industrial Computing Solutions
- 2 Video Capture Solutions
- 3 Embedded Computing Solutions
- 4 Automation Control
- 5 ORing Network Communication
- 6 Power Supply/Peripherals
- 7 Panel Solutions Introduction

# PAC-125G 10-slot Full-size Compact Chassis

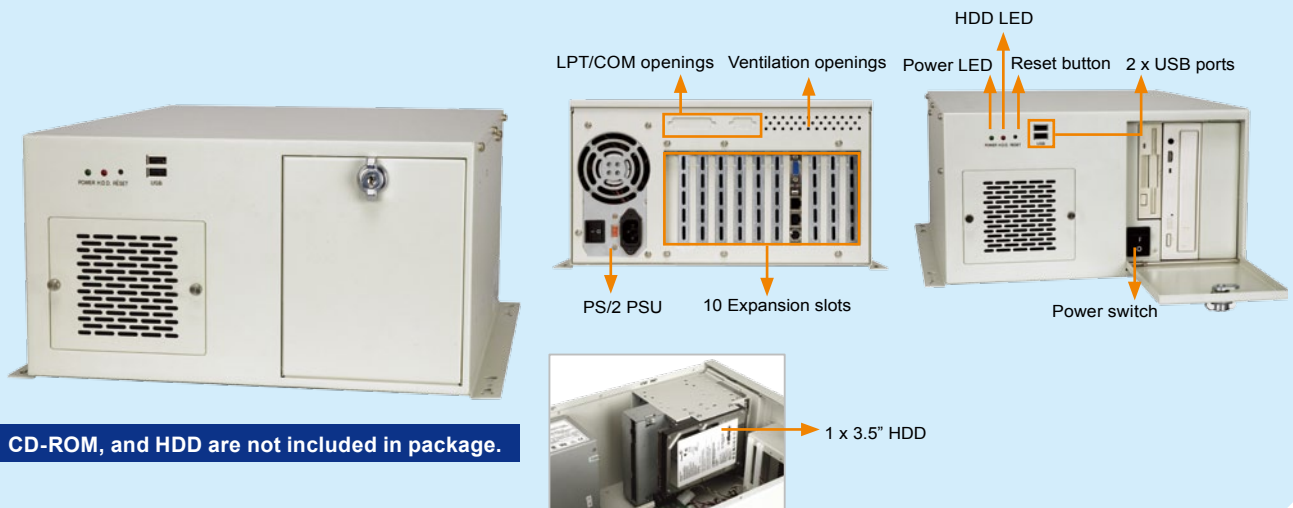


## Features

- ◆ RoHS compliant design
- ◆ Two USB ports on the front panel
- ◆ One, 8 cm hot swappable cooling fan with fan filter
- ◆ 2 x 5.25", 1 x 3.5" HDD, 1 x front-accessible 3.5"
- ◆ Lockable door prevents unauthorized access

## Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Full-size, slot CPU card
	2 x 5.25"
◆ Drive Bays	1 x Front accessible 3.5"
	1 x 3.5" HDD
◆ Cooling Fans	1 x 8 cm
◆ I/O Ports	2 x USB
◆ I/O Openings	1 x LPT, 1 x COM
◆ Expansion Slots	10 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	W: White
◆ Weight (Net/Gross)	7.2 kg/10.4 kg
◆ Dimensions (DxWxH)	420 mm x 321 mm x 176 mm

## Dimensions (measurement units: millimeter)

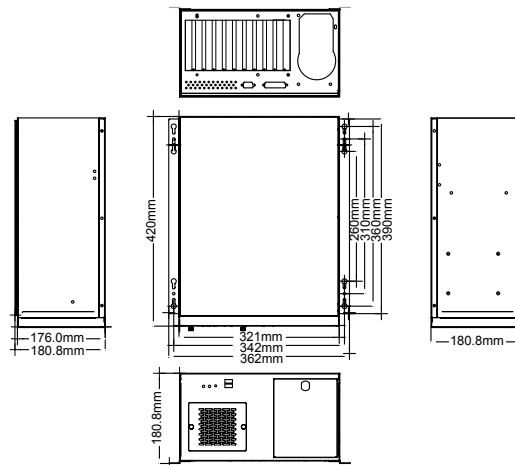

## Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe					PSU Connector
				x1	x4	x8	x16	PCIX	
BP-10S-RS	ISA	0	10	0	0	0	0	0	AT
PCI-10S-RS	PICMG 1.0	4	5	0	0	0	0	0	AT/ATX
PX-10S-RS	PICMG 1.0	7	3	0	0	0	0	0	AT/ATX
IP-8S-RS	PCISA	4	3	0	0	0	0	0	AT/ATX
IP-10S-RS	PCISA	4	5	0	0	0	0	0	AT/ATX
IPX-9S-RS	PCISA	8	0	0	0	0	0	0	AT/ATX
HPE-8S	PCI/PIC0e	4	0	2	0	0	0	0	ATX
PE-6S	PICMG 1.3	2	0	2	0	0	1	0	ATX
PE-8S <sup>1</sup>	PICMG 1.3	3	0	3	0	0	1	0	ATX
SPXE-9S	PICMG 1.3	2	0	0	2	1	0	2	ATX
SPE-9S	PICMG 1.3	3	0	0	3	1	0	0	ATX

<sup>1</sup>Only R20 or later versions support PICMG 1.3 backplane

## Power Supply Options

Type	Model No.	Watt
AT	ACE-925AP-U-RS	250W
	ACE-935AL-RS	300W
ATX	ACE-A130B-R10	300W
	ACE-A140A-S-R10	400W
	ACE-A160A-R10	600W

PAC-125G supports single PS/2 PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.

## Ordering Information

Part No.	Description
<b>PAC-125GW-R22/A130B</b>	10-slot full-size compact chassis, white, 1 x 8cm fan, with ACE-A130B-R10 (300W ATX model), RoHS
<b>PAC-125GW-R22/ACE-925AP</b>	10-slot full-size chassis, white, W/ACE-925AP PSU (200W), RoHS

1

Industrial Computing Solutions

2

Video Capture Solutions

3

Embedded Computing Solutions

4

Automation Control

5

ORing Network Communication

6


Power Supply/Peripherals

7

Panel Solutions Introduction

# PAC-53GH

3-slot Half-size Compact Chassis

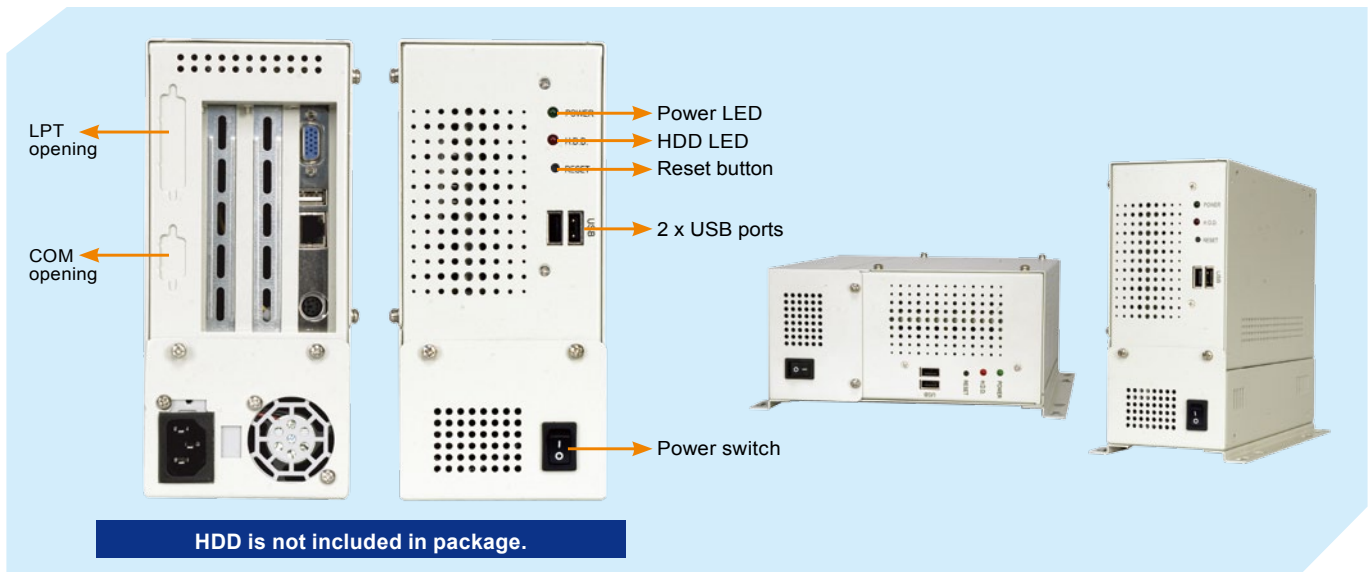


## Features

- ◆ RoHS compliant design
- ◆ Two USB ports on the front panel
- ◆ One 2.5" internal HDD bay

## Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Half-size, slot CPU cards
◆ Drive Bays	1 x 2.5" HDD
◆ I/O Ports	2 x USB
◆ I/O Openings	1 x LPT, 1 x COM
◆ Expansion Slots	3 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	W: White
◆ Weight (Net/Gross)	2 kg/3.8 kg
◆ Dimensions (DxWxH)	218 mm x 95 mm x 200 mm

## Dimensions (measurement units: millimeter)

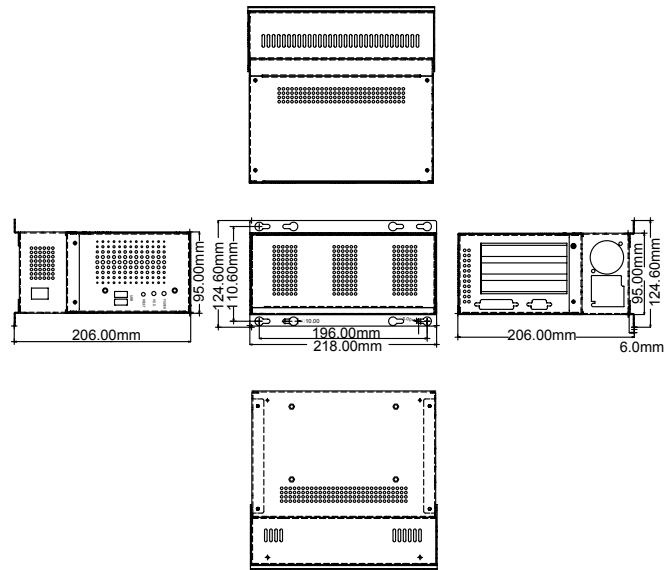

## Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
BP-3S-RS	ISA	0	3	0	0	0	AT
IP-3S-RS	PCISA	2	0	0	0	0	AT
IP-3SA-RS	PCISA	2	0	0	0	0	ATX

## Ordering Information

Part No.	Description
PAC-53GHW-R11/916AP/IP-3S	3-slot half-size chassis, with ACE-916AP-RS and IP-3S-RS-R40, RoHS
PAC-53GHW-R11/916AP/BP-3S	3-slot half-size chassis, with ACE-916AP-RS and BP-3S-RS-R40, RoHS
PAC-53GHW-R11/A618A	3-slot half-size compact chassis, white, with ACE-A618A-RS-R11 (180W ATX model), RoHS

## Power Supply Options


Type	Model No.	Watt
AT	ACE-916AP-RS	150W
ATX	ACE-A618A-RS-R11	180W
	ACE-4520C-RS	200W

PAC-53GH supports single 1U height PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.

- 1 Industrial Computing Solutions
- 2 Video Capture Solutions
- 3 Embedded Computing Solutions
- 4 Automation Control
- 5 ORing Network Communication
- 6 Power Supply/Peripherals
- 7 Panel Solutions Introduction



# PAC-42GH 4-slot Half-size Compact Chassis

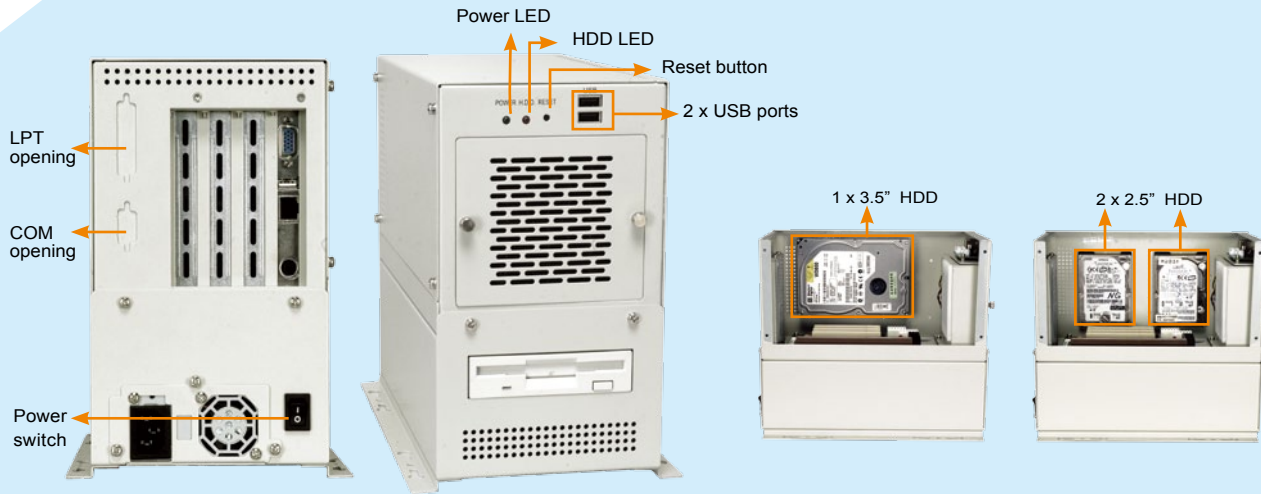

**FDD and HDD are not included in package**

## Features

1 Industrial Computing Solutions

- ◆ Two USB ports on the front panel
- ◆ One, 8 cm cooling fan with replaceable filter
- ◆ Supports one 3.5" HDD or two 2.5" HDDs

## Specifications

2 Video Capture Solutions

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Half-size, slot CPU cards
◆ Drive Combinations	1 x Front-accessible 3.5" and 1 x 3.5" HDD or 1 x Front-accessible 3.5" and 2 x 2.5" HDD
◆ Cooling Fans	1 x 8 cm
◆ I/O Ports	2 x USB
◆ I/O Openings	1 x LPT, 1 x COM
◆ Expansion Slots	4 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	W: White
◆ Weight (Net/Gross)	3.9 kg/6.1 kg
◆ Dimensions (DxWxH)	269 mm x 140 mm x 230 mm

3 Embedded Computing Solutions

4 Automation Control

5 ORing Network Communication


6 Power Supply/Peripherals

7 Panel Solutions Introduction

## Ordering Information

Part No.	Description
PAC-42GHW-R11/916AP/IP-4S	4-slot half-size chassis with ACE-916AP-RS and IP-4S-RS-R40, RoHS
PAC-42GHW-R11/916AP/BP-4S	4-slot half-size chassis with ACE-916AP-RS and BP-4S-RS-R40, RoHS
PAC-42GHW-R11/916AP/IP-4S2	4-slot half-size chassis with ACE-916AP-RS and IP-4S2-RS-R40, RoHS
PAC-42GHWPX-R11/A618A	4-slot half-size compact chassis, white, 1 x 8 cm fan, with ACE-A618A-RS-R11 (180W ATX model), RoHS

## Dimensions (measurement units: millimeter)

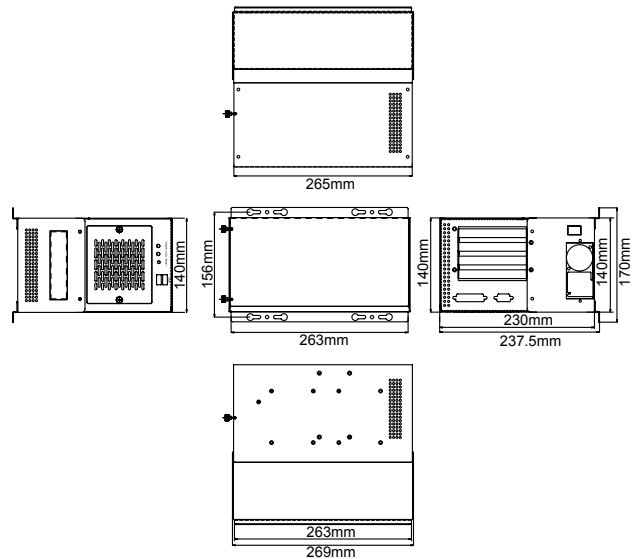

## Backplane Options


Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
BP-4S-RS	ISA	0	4	0	0	0	AT
IP-4S-RS	PCISA	3	0	0	0	0	AT
IP-4S2-RS	PCISA	2	1	0	0	0	AT
IP-4S3-RS	PCISA	0	3	0	0	0	AT
IP-4S4-RS	PCISA	0	3	0	0	0	AT
IP-4SA-RS	PCISA	3	0	0	0	0	ATX
HPE-4S1	PCI/PICoE	3	0	0	0	0	ATX
HPE-4S2	PCI/PICoE	2	0	0	1	0	ATX

## Power Supply Options

Type	Model No.	Watt
AT	ACE-916AP-RS	150W
ATX	ACE-A618A-RS-R11	180W

PAC-42GH supports single 1U height PSU. For more IEI PSU models, please refer to section 5 or visit [www.ieiworld.com](http://www.ieiworld.com).

# PR-1500G 5-slot Half-size Compact Chassis

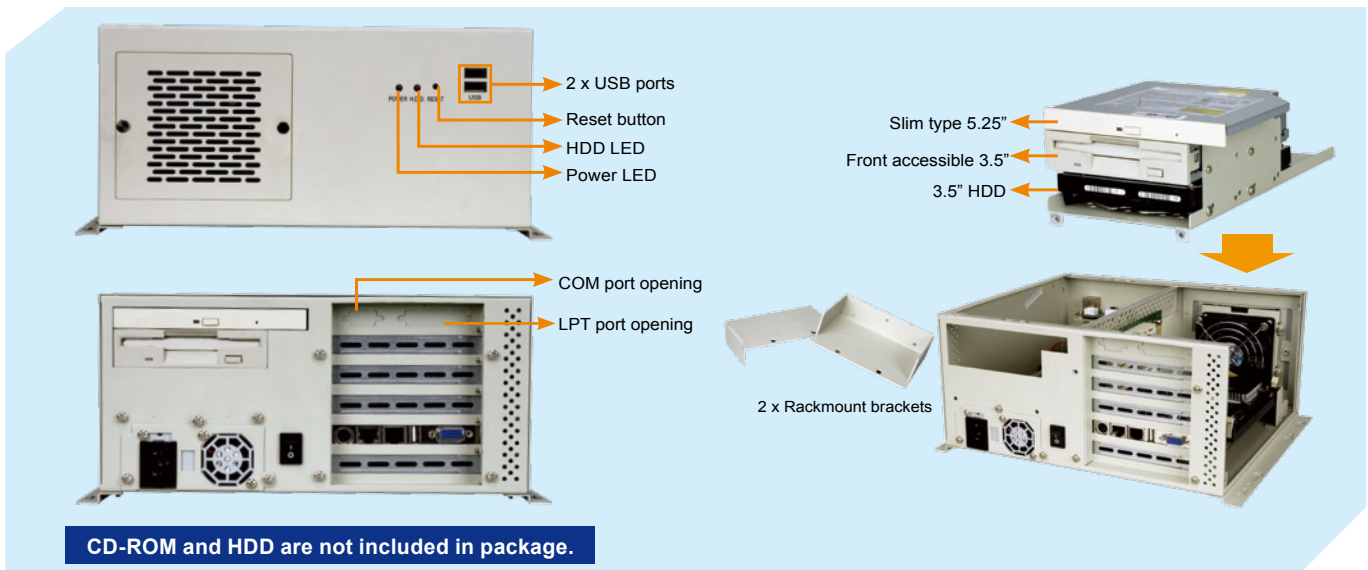

## Features

- ◆ RoHS compliant design
- ◆ One slim type 5.25" drive bay
- ◆ One 3.5" drive bay and one internal 3.5" HDD bay
- ◆ Two USB ports on the front panel
- ◆ One 8 cm cooling fan


## Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Half-size, slot SBC
◆ Drive Bays	1 x 3.5" HDD
	1 x Front accessible 3.5"
	1 x Slim 5.25"
◆ Cooling Fans	1 x 8 cm
◆ I/O Ports	2 x USB
◆ I/O Openings	1 x LPT, 1 x COM
◆ Expansion Slots	5 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	W: White
◆ Weight (Net/Gross)	3.6 kg/6.2 kg
◆ Dimensions (DxWxH)	254 mm x 286 mm x 132 mm

## Ordering Information

Part No.	Description
PR-1500GW-R12/916AP	5-slot half-size chassis, white, with ACE-916AP-RS, RoHS
PR-1500GW-R12/A618A	5-slot half-size compact chassis, white, 1 x 8 cm fan, with ACE-A618A-RS-R11 (180W ATX model), RoHS

## Dimensions (measurement units: millimeter)

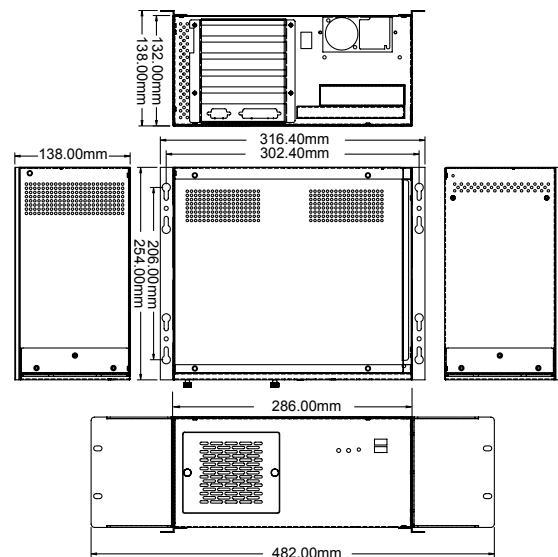

## Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
BP-5S-RS	ISA	0	5	0	0	0	AT
IP-5S2-RS	PCISA	4	0	0	0	0	AT
IP-5SA-RS	PCISA	3	1	0	0	0	ATX
IP-5SA2-RS	PCISA	4	1	0	0	0	ATX
HPE-5S1	PICO/PICoE	4	0	0	0	0	ATX
HPE-5S2	PICO/PICoE	3	0	0	1	0	ATX
HPE-5S3	PICO/PICoE	2	0	2	0	0	ATX

## Power Supply Options

Type	Model No.	Watt
ATX	ACE-916AP-RS	150W
	ACE-A618A-RS-R11	180W
	ACE-A225A-RS	250W

PR-1500G supports single 1U height PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.

1 Industrial Computing Solutions

2 Video Capture Solutions

3 Embedded Computing Solutions

4 Automation Control


5 ORing Network Communication

6 Power Supply/ Peripherals

7 Panel Solutions Introduction

# PAC-400G

5-slot Half-size Compact Chassis

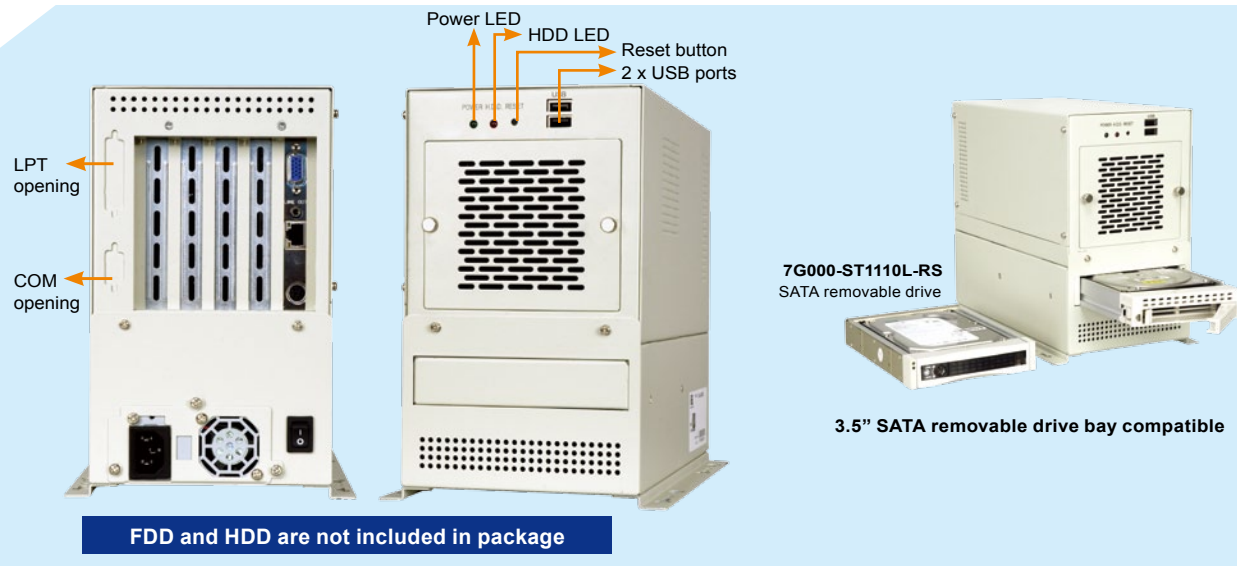

1 Industrial Computing Solutions

2 Video Capture Solutions

3 Embedded Computing Solutions

4 Automation Control

5 ORing Network Communication

6 Power Supply/Peripherals

7 Panel Solutions Introduction

## Features

- ◆ RoHS compliant design
- ◆ Two USB ports on the front panel
- ◆ One, 8 cm hot swappable fan
- ◆ One 3.5" internal HDD bay
- ◆ One 3.5" drive bay, for optional removable drive
- ◆ Supports Pentium 4 half-size CPU card


## Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Half-size, slot SBC
◆ Drive Bays	1 x 3.5" HDD
◆ Cooling Fans	1 x 8 cm
◆ I/O Ports	2 x USB
◆ I/O Openings	1 x LPT, 1 x COM
◆ Expansion Slots	5 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	W: White
◆ Weight (Net/Gross)	3.8 kg/5.6 kg
◆ Dimensions (DxWxH)	269 mm x 140 mm x 230.5mm

## Ordering Information

Part No.	Description
PAC-400GW-R11/916AP	5-slot half-size chassis, white, with ACE-916AP-RS, RoHS
PAC-400GW-R11/A618A	5-slot half-size compact chassis, white, 1 x 8 cm fan, with ACE-A618A-RS-R11 (180W ATX model), RoHS
7G000-ST1110L-RS	3.5" SATA removable drive bay with keylock, white, RoHS

## Dimensions (measurement units: millimeter)

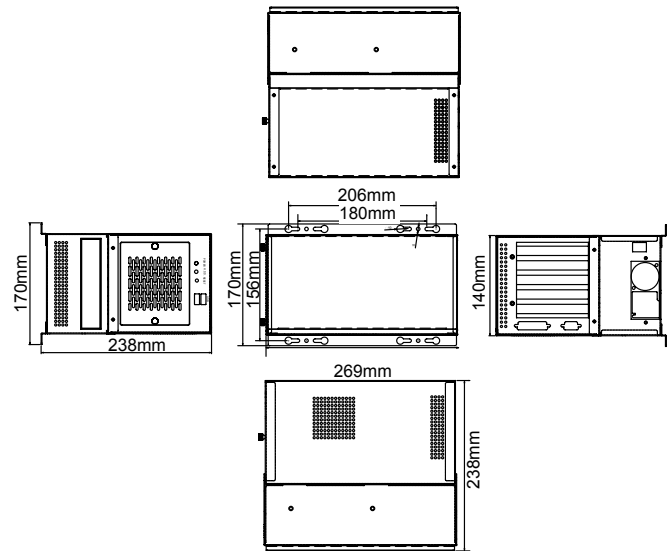

## Backplane Options


Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
BP-4S-RS	ISA	0	4	0	0	0	AT
IP-4S-RS	PCISA	3	0	0	0	0	AT
IP-4S2-RS	PCISA	2	1	0	0	0	AT
IP-4S3-RS	PCISA	0	3	0	0	0	AT
IP-4S4-RS	PCISA	0	3	0	0	0	AT
IP-4SA-RS	PCISA	3	0	0	0	0	ATX
IP-4S2A-RS	PCISA	3	0	0	0	0	ATX
HPE-4S1	PCI/PICoE	3	0	0	0	0	ATX
HPE-4S2	PCI/PICoE	2	0	0	1	0	ATX

## Power Supply Options

Type	Model No.	Watt
AT	ACE-916AP-RS	150W
ATX	ACE-A618A-RS-R11	180W

PAC-400G supports single 1U height PSU. For more IEI PSU models, please refer to section 5 or visit [www.ieiworld.com](http://www.ieiworld.com).

# PAC-700G 7-slot Half-size Compact Chassis

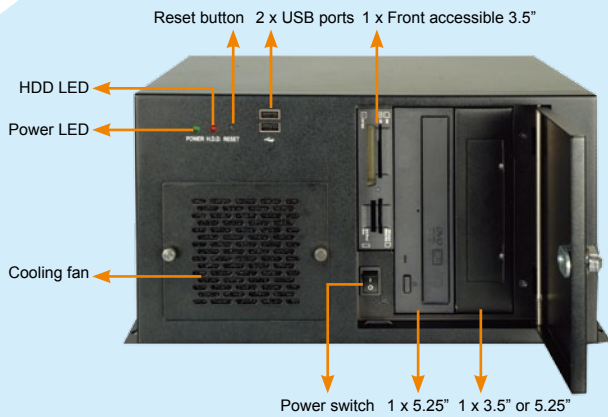

CD-ROM, and HDD are not included in package.



### Easy hot-swappable fan



Step 1: Loosen the thumb screws  
Step 2: Pull the fan out gently  
Step 3: Unplug the power connector

## Features

- ◆ RoHS compliant design
- ◆ Two USB ports on the front panel
- ◆ One, 8 cm cooling fan with fan filter
- ◆ Easy access design for quick fan replacement
- ◆ Lockable door prevents unauthorized access


## Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Half-size, slot CPU card
◆ Drive Combinations	2 x 5.25" + 1 x Front accessible 3.5"
	or 1 x 5.25" + 2 x Front accessible 3.5"
	or 1 x 5.25" + 1 x Front accessible 3.5" + 1 x 3.5" HDD
◆ Cooling Fans	1 x 8 cm
◆ I/O Ports	2 x USB on front panel
◆ I/O Openings	2 x LPT, 2 x COM
◆ Expansion Slots	7 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	B: Black
◆ Weight (Net/Gross)	6.2 kg/9 kg
◆ Dimensions (DxWxH)	279 mm x 321 mm x 176 mm

## Ordering Information

Part No.	Description
PAC-700GB-R11/BP-7S/916AP	7-slot half-size chassis, with BP-7S-RS-R30 and ACE-916AP-RS
PAC-700GB-R11/IP-7S/916AP	7-slot half-size chassis, with IP-7S-RS-R30 and ACE-916AP-RS
PAC-700GB-R11/A618A	7-slot half-size compact chassis, black, 1 x 8 cm fan, with ACE-A618A-RS-R11 (180W ATX model), RoHS

## Dimensions (measurement units: millimeter)

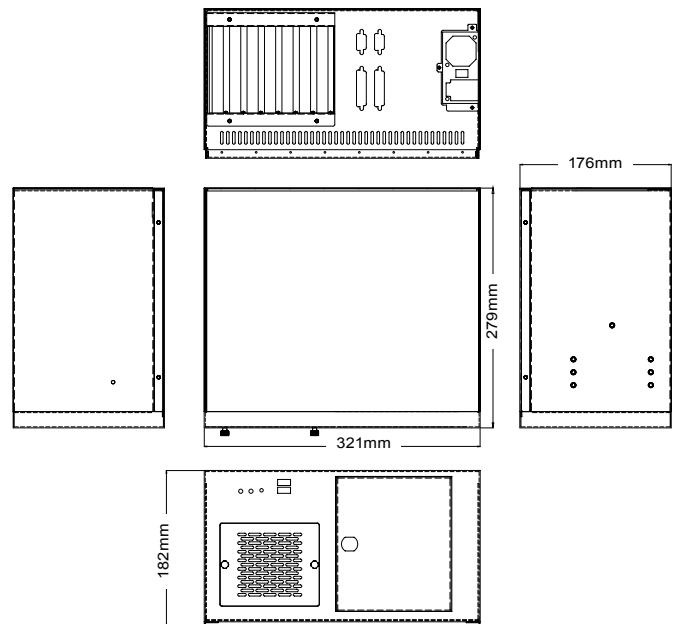

## Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
BP-7S-RS	ISA	0	7	0	0	0	AT
IP-7S-RS	PCISA	4	2	0	0	0	AT
IP-7SA-RS	PCISA	4	2	0	0	0	ATX
HPE-7S1	PCI/PIC0e	4	0	2	0	0	ATX

## Power Supply Options

Type	Model No.	Watt
AT	ACE-916AP-RS	150W
	ACE-A618A-RS-R11	180W
ATX	ACE-A225A-RS	250W

PAC-700G supports single 1U height PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.

1

Industrial Computing Solutions

2

Video Capture Solutions

3

Embedded Computing Solutions

4

Automation Control

5

ORing Network Communication

6

Power Supply/Peripherals

7

Panel Solutions Introduction