

# IES3020G-4GS

## Industrial Ethernet Switch

### User manual

#### 【Summarize】

IES3020G-4GS is an industrial grade and unmanaged Ethernet switch which supports 16 Gigabit Ethernet Ports and 4 Gigabit SFP slots. Standard Industry design can satisfied every requirement of the industry scene. All components used industry grade, it takes products high reliability. It provided wide voltage power supply input. The switch accorded to CE, FCC standard and Industry grade 4 design requirement, support 2 channel DC power input and -40~75℃ working temperature, can meet all kinds of Industrial environment requirement and provide the solution of the economy.

#### 【Packing list】

The industrial Ethernet switch is shipped with the following items. If any of these items are missing or damaged, please contact your customer service representative for assistance.

- Industrial Ethernet switch × 1
- User manual × 1
- DIN-Rail mounting kit × 1
- Warranty card × 1

#### 【Feature】

- Support IEEE802.3, IEEE802.3u, IEEE 802.3x, IEEE802.3ab, IEEE802.3z
- Support 16 10/100/1000Base-T(x) RJ45 Ethernet ports and 4 Gigabit SFP slots
- Support MAC address auto-learning, auto-aging
- Support 10K MAC address
- Support 56Gbps backboard bandwidth
- Support redundancy DC power supply(12~48VDC)
- Industrial grade 4 design, -40~75℃ work temperature
- IP40 protection grade, DIN-Rail mounting

Shenzhen 3onedata Technology Co., Ltd.

Add: 3/B, Zone 1, Baiwangxin High Technology Industrial park, Nanshan District, Shenzhen, 518108 China


Tel: +86-755-26702668

Fax: +86-755-26703485

E-mail: sales@3onedata.com


Website: www.3onedata.com

#### 【Panel layout】

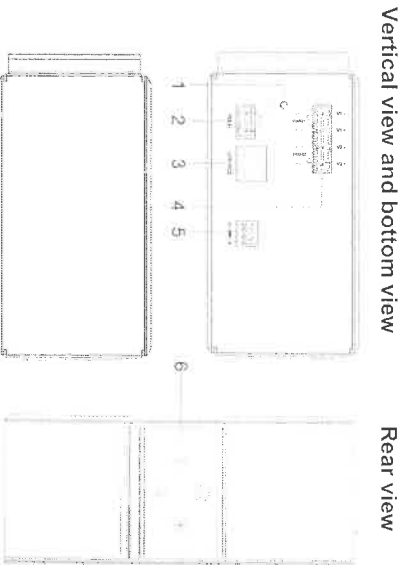


Front view

Side view

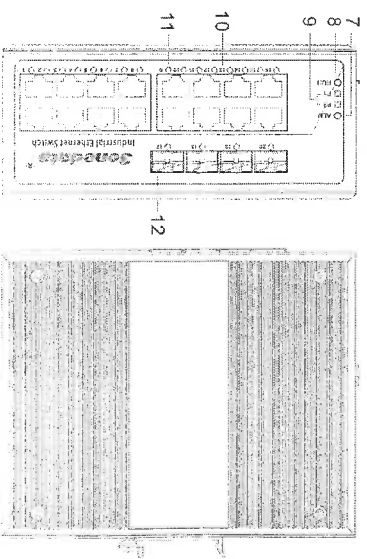

1. Ground screw
2. Console port
3. 2-pin terminal block for relay output
4. Power input terminal block
5. DIP switches
6. DIN-Rail mounting kit
7. Relay alarm LED
8. Power indicator
9. System running LED
10. 10Base-T/100Base-TX/1000Base-TX Ethernet port
11. Link/ACT LEDs
12. Gigabit SFP port

## 【Power supply input】




The switch top panel provided 4 bit power supply input terminal block, support DC input. DC power supply input supported redundancy function, provided PWR1 and PWR2 power input, can use for single, and can connect 2 separately power supply system, use 1 pair terminal block connect the device at the same time. If one of the power systems broke, the device can work un-interruptible. Built-in overcurrent protection, Reverse connection protection. Voltage input range is 12~48VDC (terminal block defined as: V1-, V1+, V2-, V2+).

### Important notice:

1. Power ON operation: first of all, insert power cable's terminal block into device's power port, then insert power supply plug into power source
2. Power OFF operation: First off all, unpin power plug, then strike the terminal block, please take care of operation sequence.

## 【Dimension】


Unit (mm)

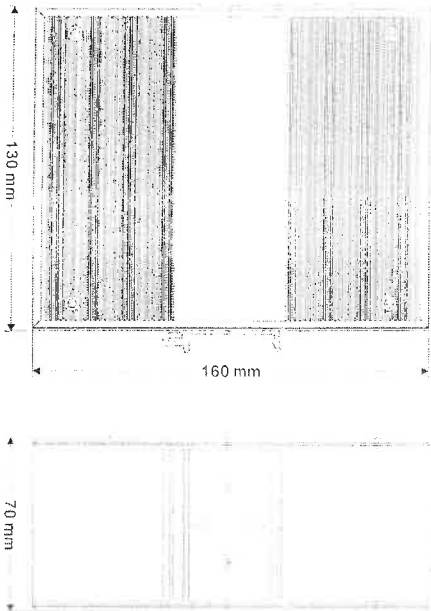

## 【Communication connector】


### 10/100/1000Base-T(X) Ethernet port

The pinout of RJ45 port display as below, connect by UTP or STP. The connect distance is no more than 100m. 1000Mbps is used 120Ω of UTP 5e; 100Mbps is used 120Ω of UTP 5; 10Mbps is used 120Ω of UTP 3, 4, 5.

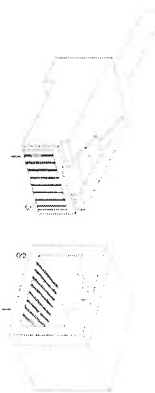


RJ 45 port support automatic MDI/MDI-X operation. That can connect the PC, Server, Converter and HUB. Pin 1, 2, 3, 4, 5, 6, 7, 8 Corresponding connections in MDI. 1→3, 2→6, 3→1, 4→7, 5→8, 6→2, 7→4, 8→5, are used as cross wiring in the MDI-X port of Converter and HUB. In MDI/MDI-X, 100/1000Base-TX PIN defines is as follows:

PIN	MDI	MDI-X
1	BI_DA+/TX+	BI_DB+/RX+
2	BI_DA-/TX-	BI_DB-/RX-
3	BI_DB+/RX+	BI_DA+/TX+
4	BI_DC+/-	BI_DD+/-
5	BI_DC-/-	BI_DD-/-
6	BI_DB-/RX-	BI_DA-/TX-
7	BI_DD+/-	BI_DC+/-
8	BI_DD-/-	BI_DC-/-




Note: 10Base-T/100Base-TX, "TX+"transmit data+, "RX+"receive data+, "—"not use.


### 10/100Base-T(X) MDI (straight-through cable)

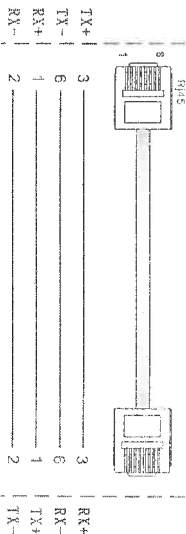


### 10/100Base-T(X) MDI-X (Cross over cable)

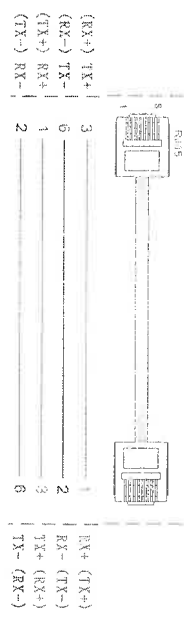

### Gigabit MDI (straight-through cable)

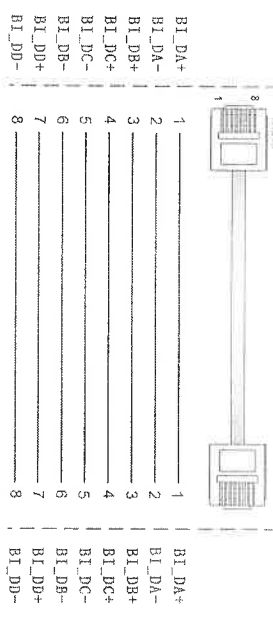

### Gigabit MDI-X (Cross over cable)

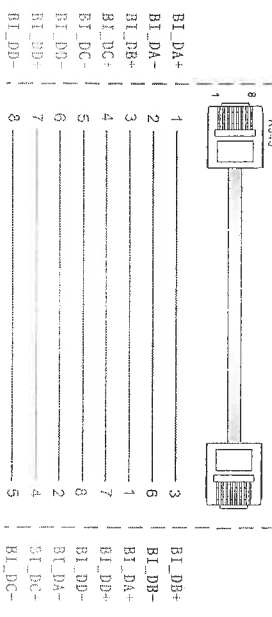


MDI/MDI-X auto connection makes switch easy to use for customers without considering the type of network cable.

### 1000Base SFP fiber port(mini-GBIC)

1000Base-X SFP fiber port adopts Gigabit mini-GBIC transmission, can choice different SFP module according to different transfer distance. Fiber interface must use for pair, TX port is transmit side, must connect to RX (receive side). The fiber interface support loss line indicator.

**Suppose:** If you make your own cable, we suggest labeling the two sides of the same line with the same letter (A-to-A and B-to-B, shown as below, or A1-to-A2 and B1-to-B2).

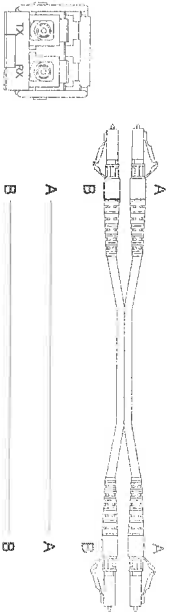

### 【LED Indicator】

LED indicator light on the front panel of product, the function of each LED is described in the table as below.

System indication LED		
LED	State	Description
P1	ON	Power is being supplied to power input PWR1
	OFF	Power is <b>not</b> being supplied to power input PWR1
P2	ON	Power is being supplied to power input PWR2
	OFF	Power is <b>not</b> being supplied to power input PWR2
Alarm	ON	When the alarm is enabled, power or the port's link is inactive.
	OFF	Power and the port's link is active, the alarm is disabled.
Run	ON/OFF	System is not running well
	Blinking	System is running well
Link/ACT (1~20)	ON	Port connection is active
	Blinking	Data transmitted
	OFF	Port connection is not active

### 【Installation】

Before installation, confirm that the work environment meet the installation require, including the power needs and abundant space. Whether it is close to the connection equipment and other equipments are prepared or not.

1. Avoid in the sunshine, keep away from the heat fountainhead or the area where in intense EMI.

2. Examine the cables and plugs that installation requirements.


3. Examine whether the cables be seemly or not (less than 100m) according to reasonable scheme.

4. Power: support 12~48VDC power supply

5. Environment: working temperature: -40~75℃

Storage Temperature: -40~85℃

Relative humidity 5%~95%

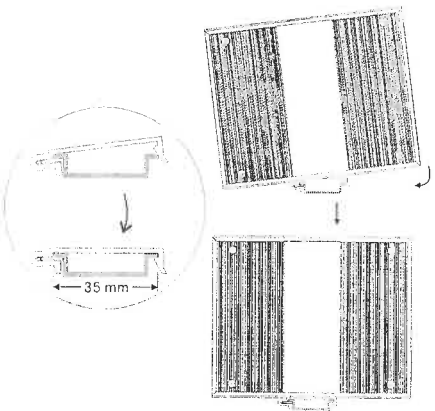

### DIN Rail Installation

In order to use in industrial environments **expeditly**, the product adopt 35mm DIN-Rail installation, the installation steps as below:

1. Examine the DIN-Rail attachment suitability or not.
2. Examine DIN Rail whether be firm and the position is suitable or not.
3. Insert the top of the DIN-Rail into the slot just below the stiff metal spring.
4. The DIN-Rail attachment unit will snap into place as shown below.

### Wiring Requirements

Cable laying need to meet the following requirements:

1. It is needed to check whether the type, quantity and specification of cable match the requirement before cable laying;
2. It's needed to check the cable is damaged or not, factory

records and quality assurance booklet before cable laying;

3. The required cable specification, quantity, direction and laying position need to match construction requirements, and cable length depends on actual position;

4. All the cable cannot have break-down and terminal in the middle;

5. Cables should be straight in the hallways and turning;

6. Cable should be straight in the groove, and cannot beyond the groove in case of holding back the inlet and outlet holes. Cables should be banded and fixed when they are out of the groove;

7. User cable should be separated from the power lines. Cables, power lines and grounding lines cannot be overlapped and mixed when they are in the same groove road. When cable is too long, it cannot hold down other cable, but structure in the middle of alignment rack;

8. Pigtail cannot be tied and swerved as less as possible. Swerving radius cannot be too small (small swerving causes terrible loss of link). Its banding should be moderate, not too tight, and should be separated from other cables;

9. It should have corresponding simple signal at both sides of the cable for maintaining.

### 【Specification】

#### Technology

Standard: IEEE802.3, IEEE802.3x, IEEE802.3u, IEEE802.3ab/z

Flow control: IEEE802.3x flow control, back press flow control

#### Exchange attribute

100M forward speed: 148810pps

1000M forward speed: 1488100pps

Transmit mode: store and forward

System exchange bandwidth: 56G

MAC address table: 16K

Memory: 12M

**Interface**

Gigabit RJ45 port: 10Base-T/100Base-TX/1000Base-TX auto speed control, Half/full duplex and MDI/MDI-X auto detect

Gigabit SFP port: 1000Base-X, SFP slot

**Transfer distance**

Twisted cable: 100M (standard CAT5/CAT5e cable)

Multi-mode: 1310nm, 2Kkm

Single-mode: 1310nm, 20/40Kkm

1550nm, 60/80/100/120Kkm

**LED indicator**

Run indicator: RUN

Interface indicator: Link (1~20)

Power supply indicator: P1, P2

Alarm indicator: ALM

**Power supply**

Input Voltage: 12~48VDC

Type of input: 4 bits terminal block

DC support reverse connection

DC support redundant power supply

**Consumption**

No-load consumption: 11.04W@48VDC

Full-load consumption: 12.88W@48VDC

**Working environment**

Working temperature: -40~75℃

Storage temperature: -40~85℃

Relative Humidity: 5%~95%( no condensation)

**Mechanical Structure**

Shell: IP40 protect grade, metal shell

Installation: DIN-Rail mounts

Weight: 1080g

Size (W×H×D): 70mm×160mm×130mm

**Industry Standard**

EMI: FCC Part 15, CISPR (EN55022) class A

EMS: EN61000-4-2 (ESD), Level 3

EN61000-4-3 (RS), Level 3

EN61000-4-4 (EFT), Level 3

EN61000-4-5 (Surge), Level 3

EN61000-4-6 (CS), Level 3

EN61000-4-8, Level 5

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

**Certification**

CE, FCC, RoHS, UL508 (Pending)

Warranty: 5 years