


Connection Options

Male DB9



PIN	DB9(M)	PIN	DB9(M)
1	DCD	5	GND
2	RxD	6	DSR
3	TxD	7	RTS
4	DTR	8	CTS


CBL-M37M9x4-30 (DB37 to male DB9 x 4)



OPT4-M9A (DB37 to male DB9 x 4)



Male DB25




PIN	DB25(M)	PIN	DB25(M)
2	TXD	6	DSR
3	RxD	7	GND
4	RTS	8	DCD
5	CTS	20	DTR

CBL-M37M25x4-30 (DB37 to male DB25 x 4)



8-Pin RJ45




PIN	RJ45	PIN	RJ45
1	DSR	5	RxD
2	RTS	6	DCD
3	GND	7	CTS
4	TxD	8	DTR

OPT4-RJ45A (DB37 to 8-Pin RJ45 x 4)



The Best Choice for POS Solutions

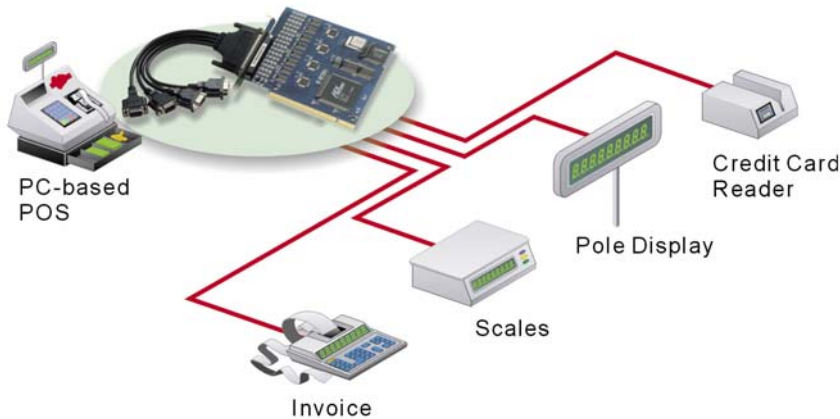

Ordering Information

C104H: ISA bus, 4-port serial board

C104HS: ISA bus, 4-port serial board w/ Surge Protection

All items include:

- CBL-M37M25x4-30 or CBL-M37M9x4-30 Connection cable
- C104H or C104HS board with standard bracket
- Documentation & Software CD-ROM
- Quick Installation Guide

Optional Connectors

Opt4-M9A: 4-port male DB9 connection box

Opt4-RJ45A: 4-port 8-pin RJ45 connection box

CBL-M37M9x4-30: 4-port male DB9 connection cable

CBL-M37M25x4-30: 4-port male DB25 connection cable