

## 10/100/1000M PoE Extender 25.5W

(ONV-PSE-PD3301-at)

### 10/100/1000M PoE Extender 25.5W



- ◆ Supply power to IP network cameras through Cat5e cables (PoE)
- ◆ Compatible with IEEE 802.3at PSE devices
- ◆ Support 10/100/1000M data transmission through RJ45 port
- ◆ Auto-negotiation and auto-MDIX fast Ethernet RJ45 port
- ◆ Both mid-span ( 4/5+, 7/8- ) and end-span ( 1/2+, 3/6- )
- ◆ IEEE 802.3at; IEEE 802.3i; IEEE 802.3u; IEEE 802.3x Flow Control; IEEE 802.1at DTE Power via MDI
- ◆ 100Base-TX : Cat5 UTP(≤100 meters)
- ◆ Store-And-Forward architecture
- ◆ 2x RJ45 PoE ports; maximum 25.5W for single PoE port
- ◆ Front-end receiving and Back-end supply power

### Product Description



ONV-PSE-PD3301-at is a simple device which can extend the 100m standard data transmission to 200m through CAT5e/6 UTP cable, by just plug and play but no additional power supply or set up required. It offers you great flexibility to extend the distance of PoE network to triple, quadruple further in length or more. And this device supports forwards both Ethernet data and PoE power to remote devices

For the cost saving and power management purpose, this device can be widely used for City intelligent traffic monitoring system (ITS), safe city, and wireless city; large industrial factory& enterprise security surveillance system; Highway surveillance system, electronic road surveillance, snapshot system; Remote multimedia teaching & campus surveillance, video conferencing systems; Building intercom, wireless communications, video surveillance.

### Technical Specification

|  |   |
|--|---|
| <b>Product Name</b>                    | 10/100/1000M PoE Extender 25.5W   |
| <b>Model</b>                           | ONV-PSE-PD3301-at   |
| <b>Description</b>                     | 10/100/1000M PoE extender, extends the data transmission from 100m to 200m  |
| <b>Network Protocols and Standards</b> | IEEE 802.3i 10BASET;<br>IEEE 802.3u 100BASET;<br>IEEE 802.3x Flow Control;<br>IEEE 802.1at DTE Power via MDI;<br>IEEE 802.3at |
| <b>Network Medium</b>                  | Cat5 or more UTP(≤100 meter)  |
| <b>Backplane Bandwidth</b>             | 8Gbps   |
| <b>Forwarding Way</b>                  | Store-And-Forward architecture  |
| <b>MAC Address Table Size</b>          | 1K  |
| <b>Port Description</b>                | 1x RJ45 PoE input port; 1x RJ45 PoE output port   |
| <b>PoE Features</b>                    | PoE standard: IEEE802.3at   |
|  | PoE port power: 25.5W   |
|  | Default: end-span(1/2+, 3/6-) . Optional:Mid-span(4/5+, 7/8- )  |
| <b>LED Indicator Status</b>            | ACT/LINK: Network status , PoE: PoE working status  |
| <b>Dimension/Weight</b>                | Dimension(LxWxH): 74.5x103.5x25.5mm   |
| <b>Environment</b>                     | Operating temperature: 0 to 55° C;<br>Storage temperature: -20 to 75°C;<br>Working Humidity: 10%~90%, non-condensing          |
| <b>Safety</b>                          | CE Mark ,commercial, FCC Class, RoHS  |
| <b>Warranty</b>                        | 1 year warranty   |
| <b>Package List</b>                    | POE Extender, User Guide, Warranty Card   |


Product Size Display

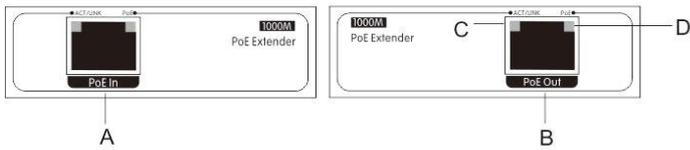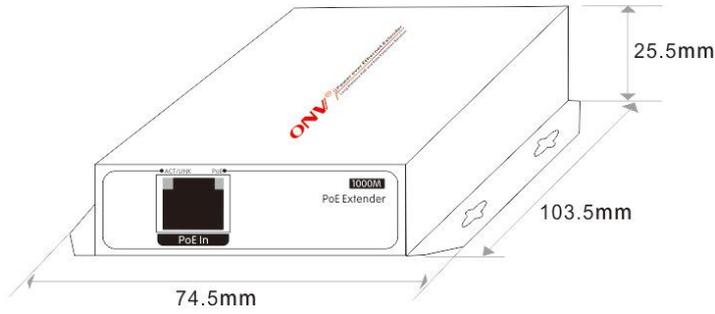

A. PoE Input RJ45 Port  
C. ACT/LINK Indicator

B. PoE Output RJ45 Port  
D. PoE Indicator

Product Usage Display

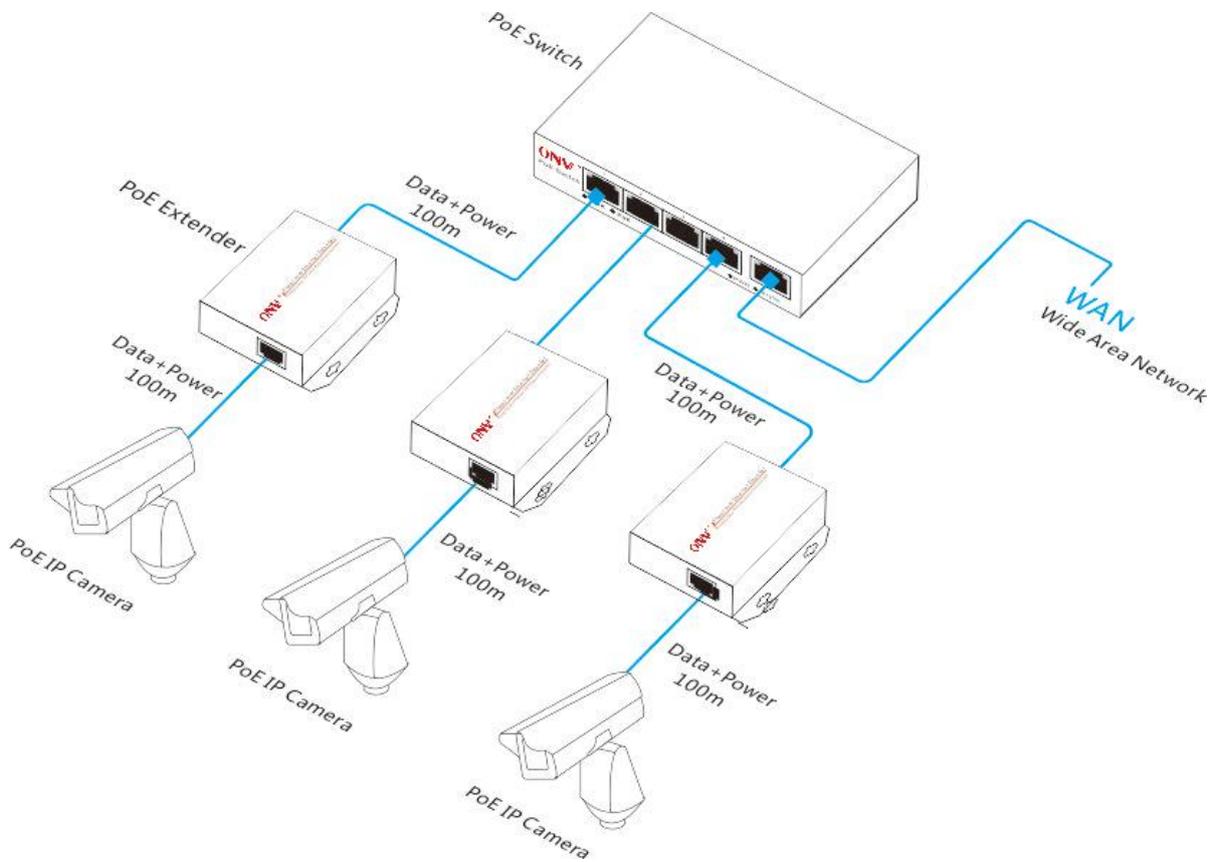

**Product Ordering Information**

---

**Model:** ONV-PSE-PD3301-at

**Description:** 100M PoE extender, 1x RJ45 PoE input port; 1x RJ45 PoE output ports; 25.5W, IEEE802.3at; It extends the data transmission from 100m to 200m

**Ordering Note:** end-span (1/2+, 3/6-),by default; Mid-span (4/5+, 7/8- ), can be customized

**Product Packing Lists**

---

|              |                                      |
|--------------|--------------------------------------|
| Package List | 10/100/1000M PoE Extender with 25.5W |
|              | User Guide                           |
|              | Warranty Card                        |